


Outline Drawing (Size: mm)

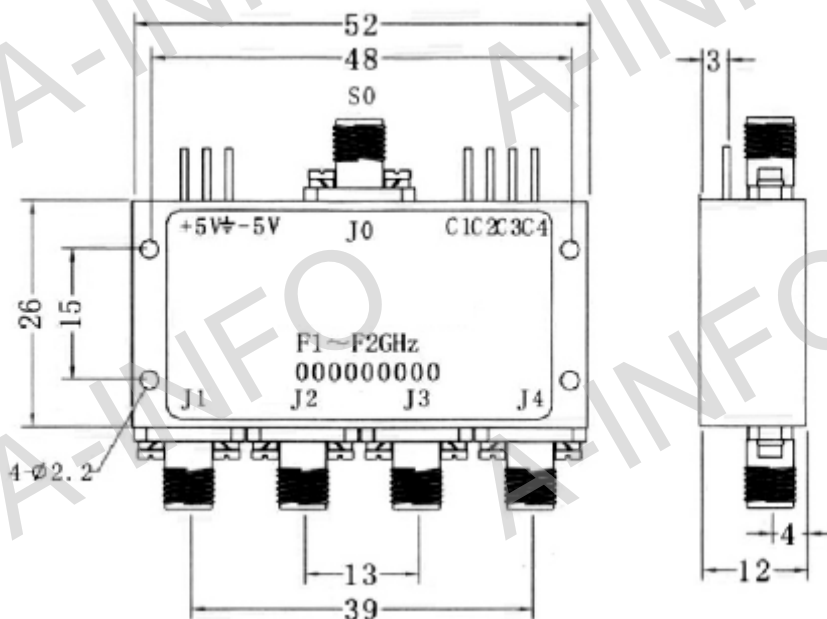

Technical Specification

Item	Technical Specification
Frequency Range(GHz)	12.0-18.0
Insertion Loss(dB)	3.5 max
Isolation(dB)	60 min
VSWR	2.0 max
Switching Speed(ns)	50 max
Power Handling(W)	0.2 max
Connector	SMA-Female
Operating Temperature(°C)	-55 ~ + 85
Storage Temperature(°C)	-65 ~ +125
Net Weight(Kg)	0.04 Around

Test Results

Port	Insertion Loss(dB)	VSWR	Isolation(dB)
J0-J1	3.42	1.61	62.5
J0-J2	3.19	1.58	67.6
J0-J3	3.20	1.82	67.4
J0-J4	3.46	1.71	65.7