

LIMITING VALUES

$T_{amb} = 25\text{ °C}$ unless otherwise noted

Symbol	Parameter	Conditions	MIN.	MAX.	UNIT
V_D	Supply Voltage			9	V
P_{LO}	Local Oscillator Input Power			0	dBm
P_{RF}	RF Input Power			TBD	dBm
T_{amb}	Ambient temperature		-30	+85	°C
T_j	Junction temperature			+150	°C
T_{stg}	Storage temperature		-55	+150	°C

THERMAL CHARACTERISTICS

Symbol	Parameter	Value	UNIT
$R_{th(j-a)}$	Thermal resistance from junction to ambient ($T_a = 25\text{ °C}$)	TBD	°C/W

CHARACTERISTICS

$T_{amb} = 25\text{ °C}$ – RF Performance measured on wafer.




Symbol	Parameter	Conditions	MIN.	TYP.	MAX.	UNIT
<i>Unless otherwise specified LO Power = -5 dBm; IF = 30 MHz; RF = 2.2 GHz; Down Converter Mode</i>						
V_{DD}	Supply Voltage			7		V
I_{DD}	Supply Current		17	21	25	mA
BW_{RF}	RF Bandwidth		0.1		6	GHz
BW_{LO}	LO Bandwidth		0.1		6	GHz
BW_{IF}	IF Bandwidth		DC		3	GHz
G_c	Conversion Gain		9	11	14	dB
NF (SSB)	SSB Noise Figure			8		dB
ISO_{RF-IF}	RF to IF Leakage			-35	-30	dBc
ISO_{LO-IF}	LO to IF Isolation		30	35		dB
P_{1dB}	Input 1dBm Compression Point		-7	-5		dBm



Caution : This device is a high performance RF component and can be damaged by inappropriate handling. Standard ESD precautions should be followed. OMMIC document “OM-CI-MV/ 001/ PG” contains more information on the precautions to take.



ON WAFER MEASUREMENTS – CONVERSION GAIN

T = 25 °C. Calculated with inductance of 0.3 nH to take into account the bonding inductance.

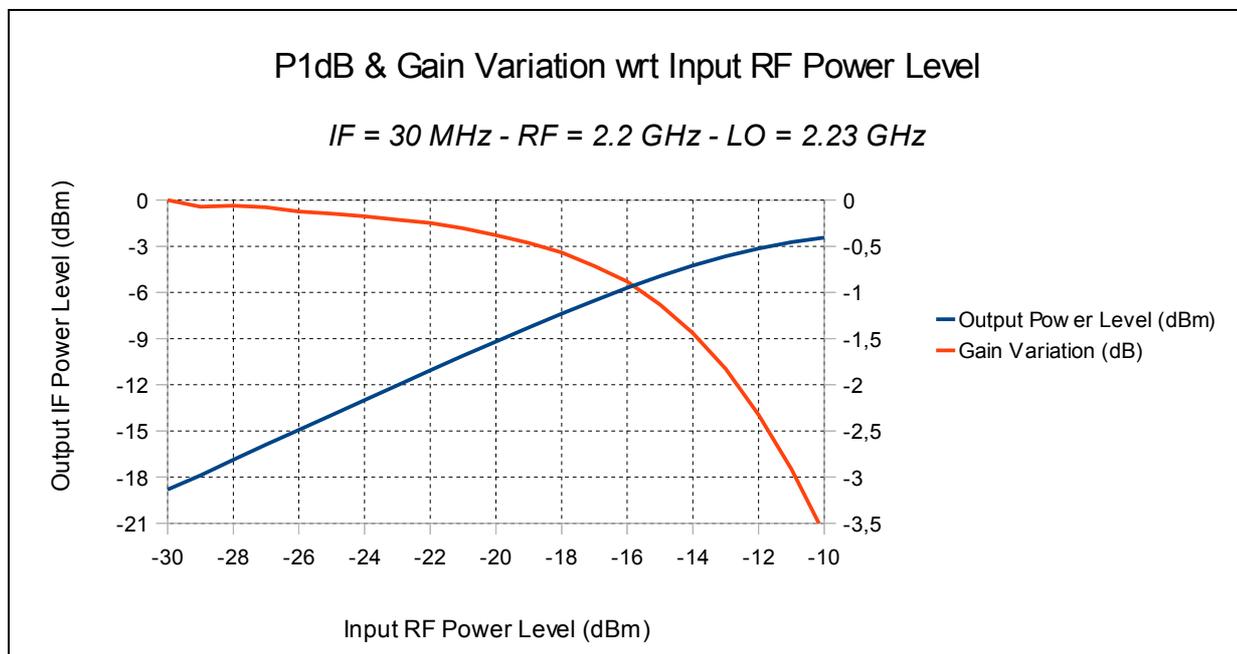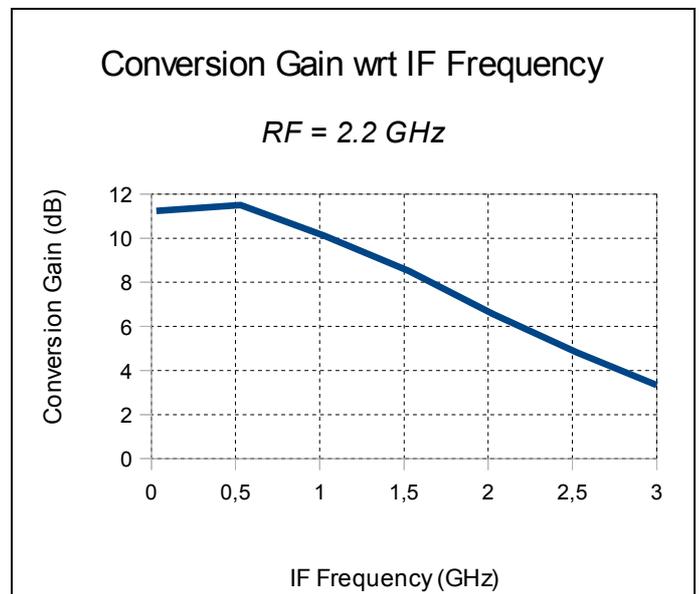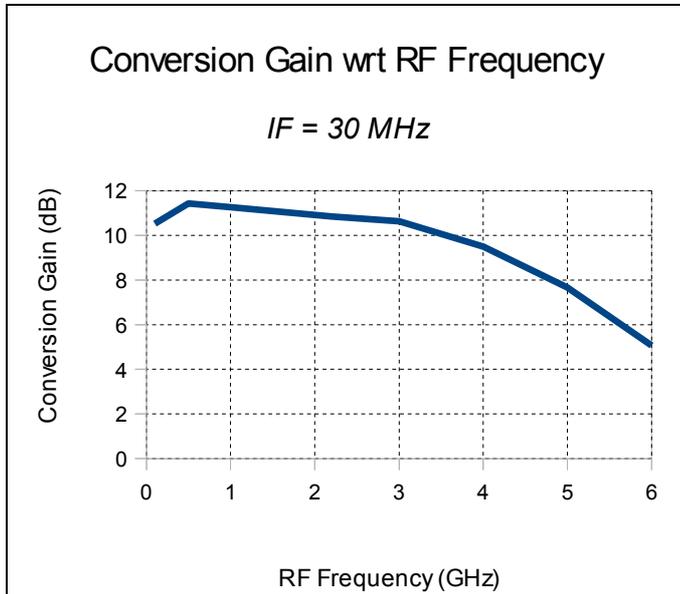

ON WAFER MEASUREMENTS – ISOLATIONS

T = 25 °C. Calculated with inductance of 0.3 nH to take into account the bonding inductance.

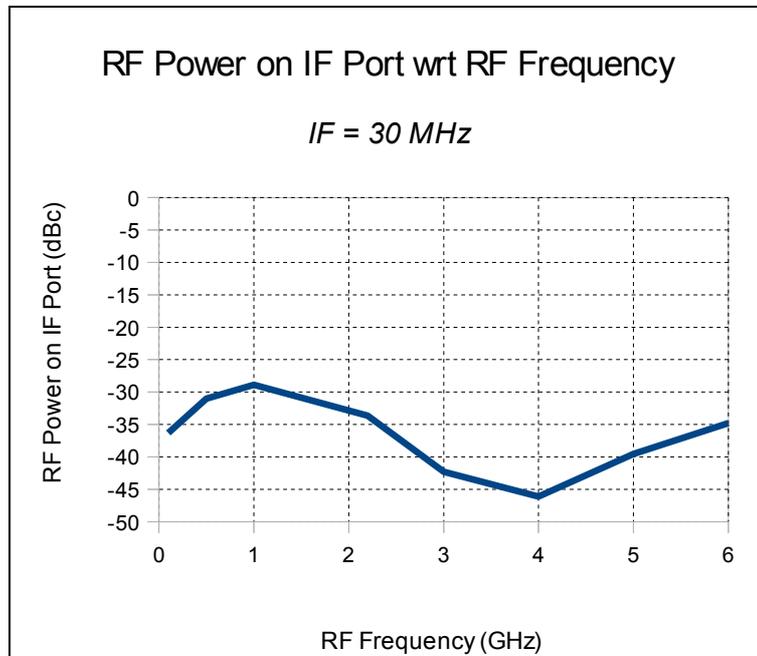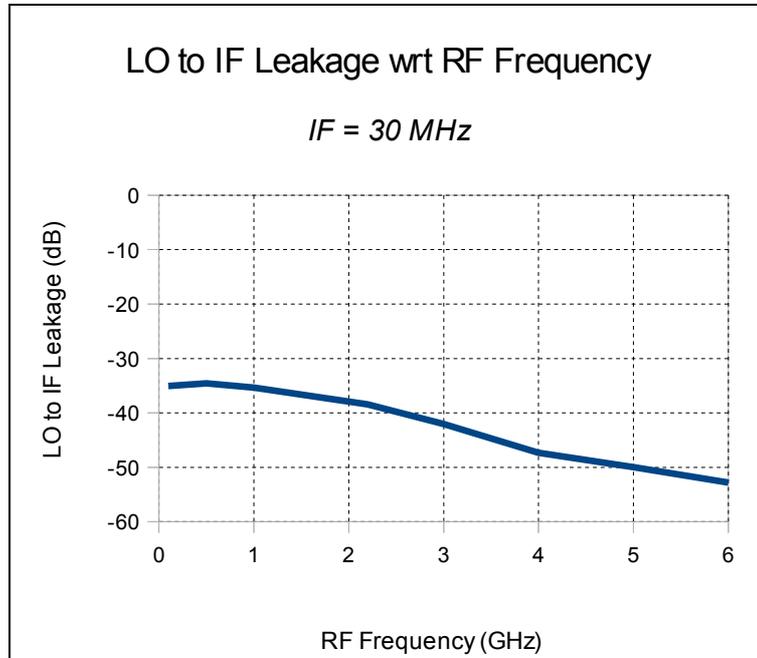


MECHANICAL INFORMATION

Chip size : 1100 μm x 1700 μm (before wafer sawing)
Substrate thickness : 100 μm
RF, IF & LO pads size : 80 x 200 μm
DC pads size : 80 x 80 μm



Caution : This device is a high performance RF component and can be damaged by inappropriate handling. Standard ESD precautions should be followed. OMMIC document "OM-CI-MV/ 001/ PG" contains more information on the precautions to take.

BLOCK DIAGRAM

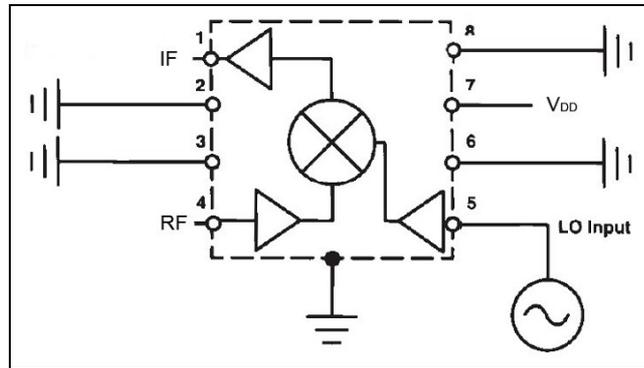

PAD POSITION

PAD NAME	SYMBOL	COORDINATES		DESCRIPTION
		X	Y	
LO	LO	1580	180	Local Oscillator Input
RF	RF	120	550	RF Input
IF	IF	120	920	IF Output
VD	VD	1580	980	Supply Voltage

X=0, Y=0 at bottom left corner.

Coordinates correspond to the center of the Bonding Pad.

See Mechanical Information for more details.

BONDING DIAGRAM AND ASSEMBLY INFORMATION

The bonding wires should be gold and be as short as possible. The CGY2184UH uses through substrate via holes to obtain excellent RF grounding. The backside of the MMIC must be appropriately connected to the system ground.

DEFINITIONS

Limiting values definition

Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information

Applications that are described herein for any of these products are for illustrative purposes only. OMMIC makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

DISCLAIMERS

Life support applications

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. OMMIC's customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify OMMIC for any damages resulting from such application.

Right to make changes

OMMIC reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. OMMIC assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

ORDERING INFORMATION

Generic type	Package type	Version	Description
CGY2183UH	Bare Die	C1	Active Double Balanced Quad Mixer



Document History : Version 1.0, Last Update 22/05/2012

OMMIC