

## SCHOTTKY BARRIER RECTIFIERS

**Reverse Voltage: 150---200V  
Forward Current: 10A**


### FEATURES

- Metal-Semiconductor junction with guard ring
- Epitaxial construction
- Low forward voltage drop, low switching losses
- High surge capacity
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- The plastic material carries U/L recognition 94V-0

### MECHANICAL DATA

- **Case:** JEDEC TO-220AB, molded plastic body
- **Terminals:** Solderable per MIL-STD-750, Method 2026
- **Polarity:** As marked
- **Mounting Position:** Any
- **Weight:** 0.08 ounce, 2.24 grams

### TO-220AB

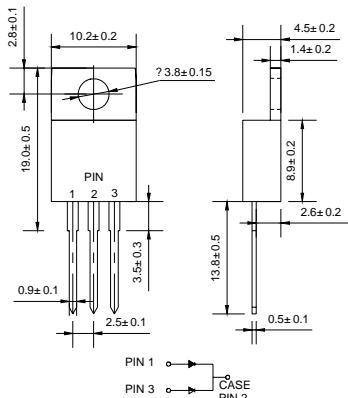

Dimensions in millimeters

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	MBR10150CT	MBR10200CT	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	150	200	V
Maximum RMS voltage	$V_{RWS}$	135	140	V
Maximum DC blocking voltage	$V_{DC}$	150	200	V
Maximum average forward total device rectified current @ $T_C=100^\circ C$	$I_{(AV)}$	10		A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	125		A
Maximum instantaneous forward voltage @5.0A	$V_F$	0.95		V
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	$I_R$	0.1 15		mA
Maximum thermal resistance (Note1)	$R_{\theta JC}$	1.5		°C/W
Operating junction temperature range	$T_J$	-55 --- +150		°C
Storage temperature range	$T_{STG}$	-55 --- +150		°C

NOTES: 1. Thermal resistance from junction to case.

[www.galaxytcn.com](http://www.galaxytcn.com)

# RATINGS AND CHARACTERISTIC CURVES

MBR10150CT--MBR10200CT

FIG.1 TYPICAL FORWARD CHARACTERISTICS

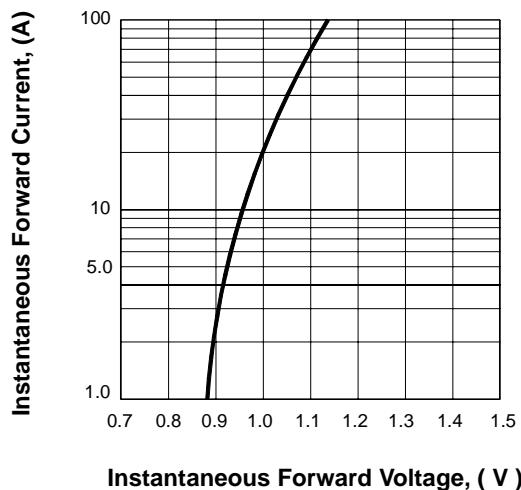


FIG.2 FORWARD DERATING CURVE

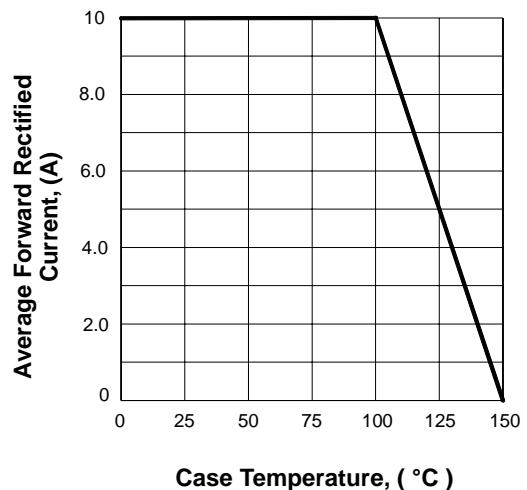


FIG.3 TYPICAL REVERSE CHARACTERISTICS

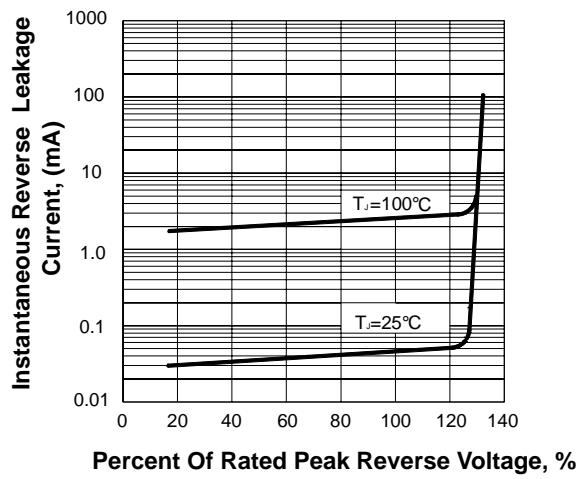


FIG.4 PEAK FORWARD SURGE CURRENT

