


Outline Drawing (Size: mm)

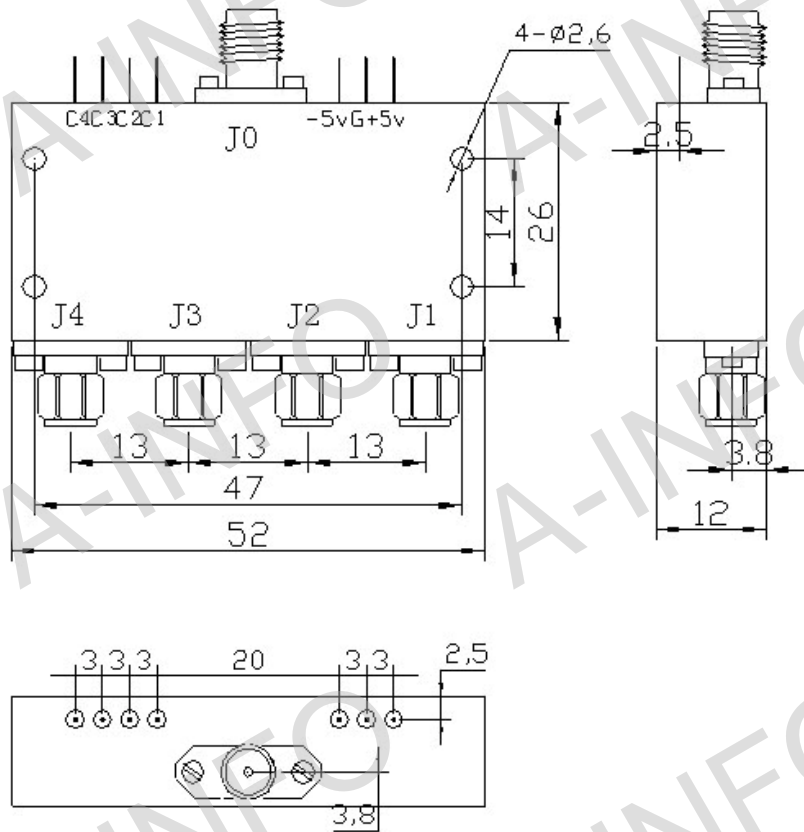


Technical Specification


Item	Technical Specification
Frequency Range(GHz)	3.7-6.7
Insertion Loss(dB)	2.8 max
VSWR	1.5 max
Isolation(dB)	80 min
Switching Speed(ns)	50 max
Power Handling(W)	0.2 max
Impedance(Ohms)	50
Power Supply(V)	+/-5
Current(mA)	110/+5V, 100/-5V
Input Connector	SMA-Female
Output Connector	SMA-Male
Control	TTL
RoHS Compliance	Yes

Test Results


Insertion Loss & Input VSWR(J0-J1)

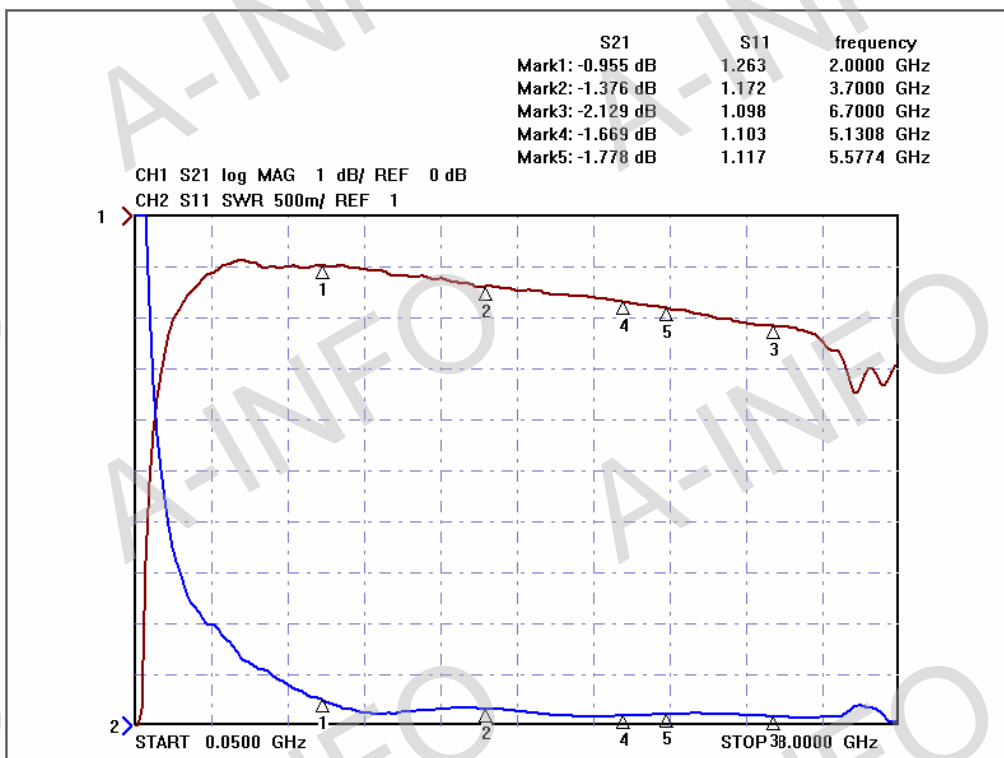


Isolation(J0-J1)

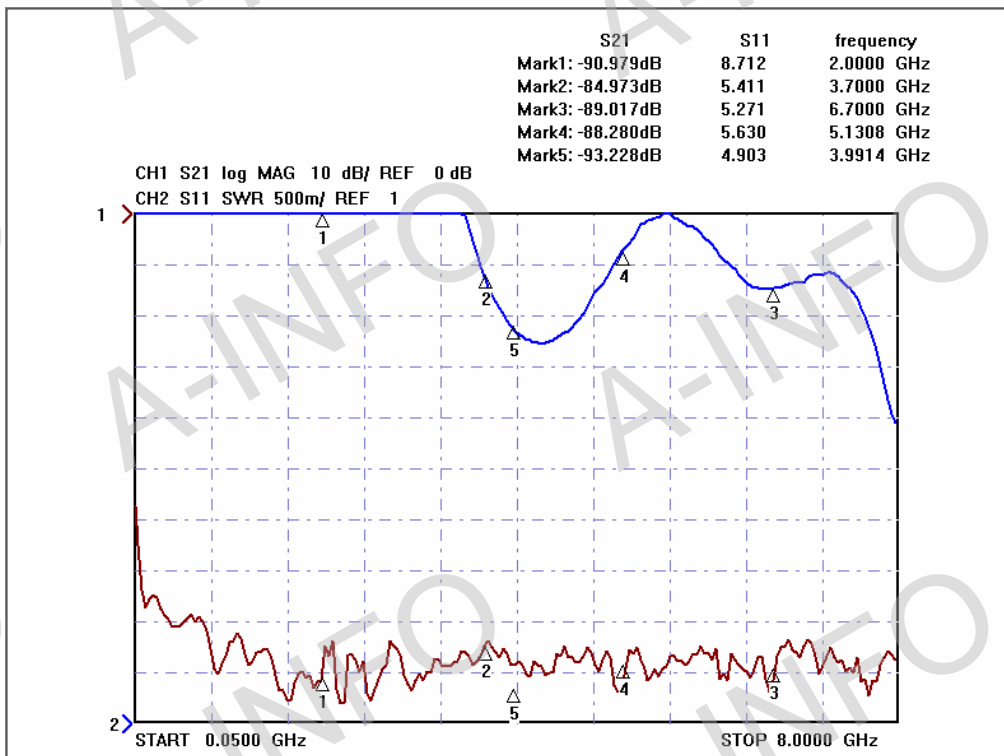


Insertion Loss & Input VSWR(J0-J2)

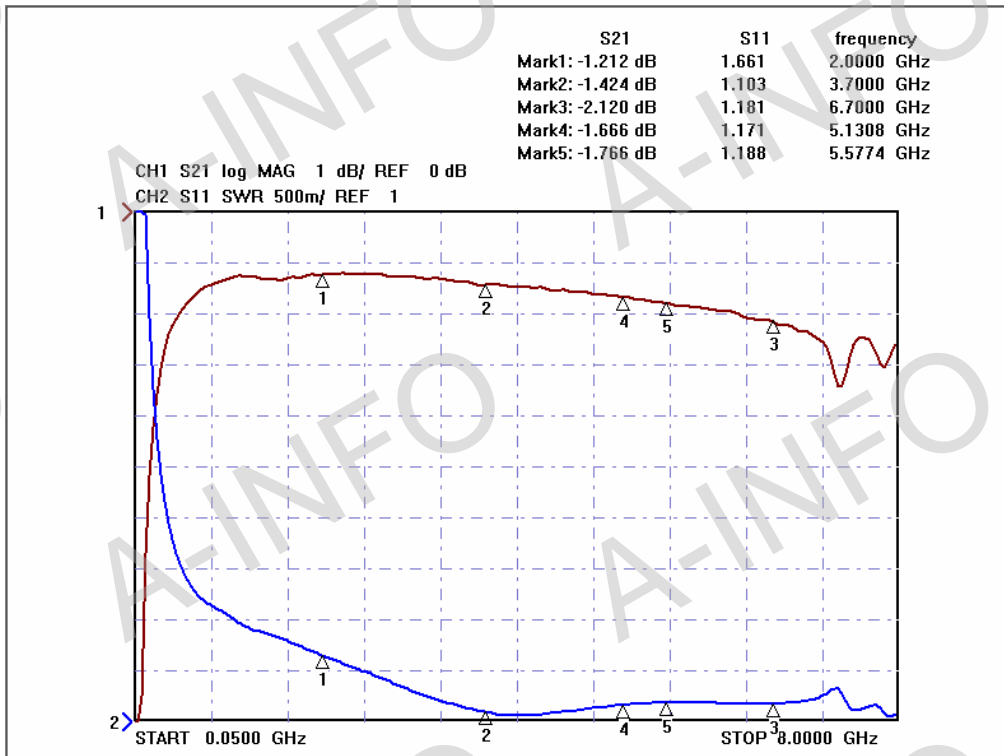


Isolation(J0-J2)

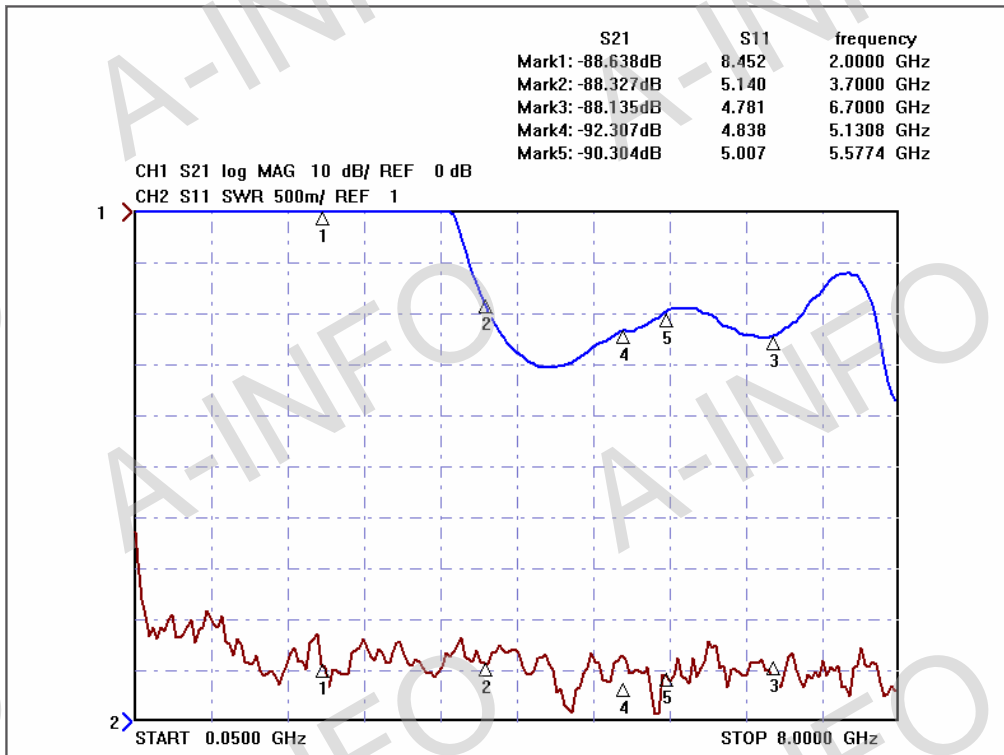


Insertion Loss & Input VSWR(J0-J3)

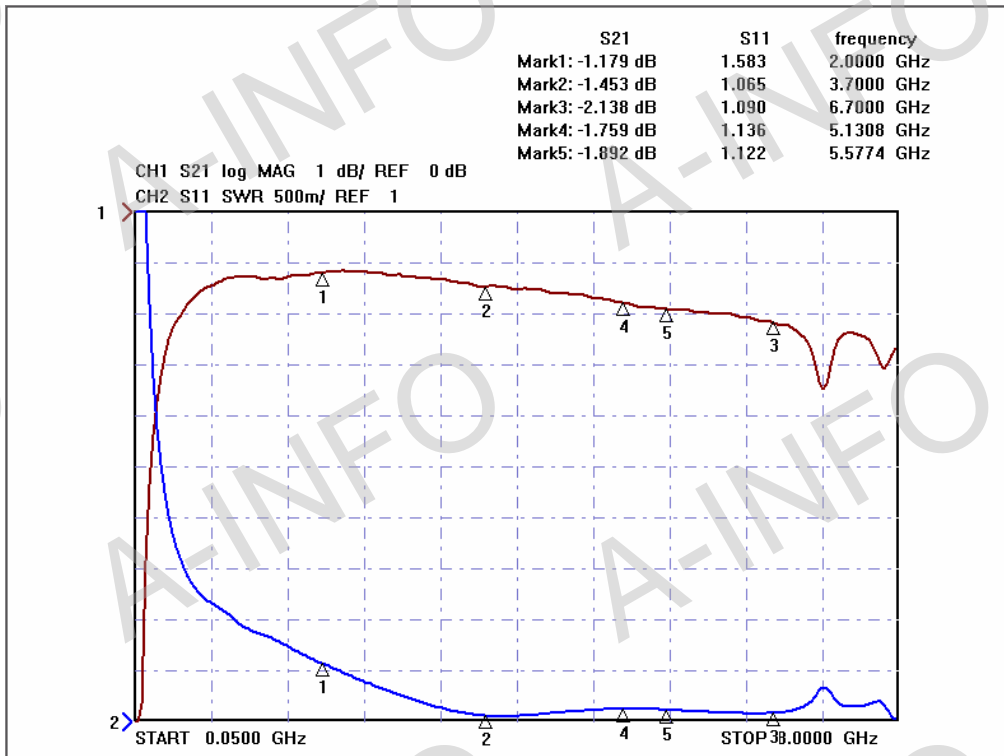

Isolation(J0-J3)

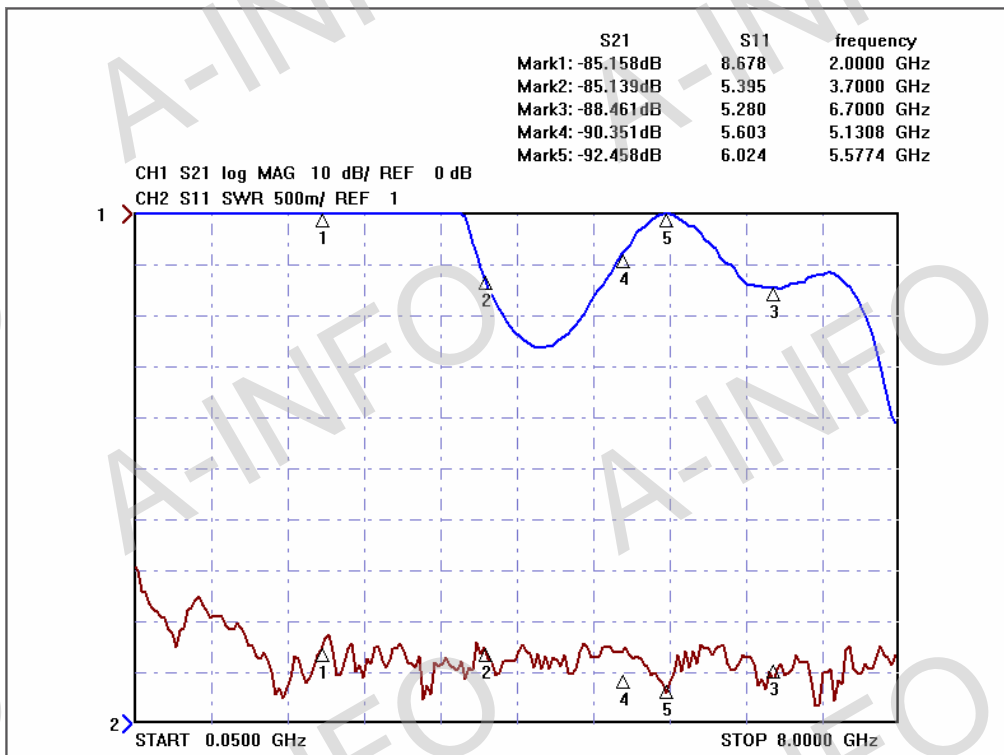

Insertion Loss & Input VSWR(J0-J4)

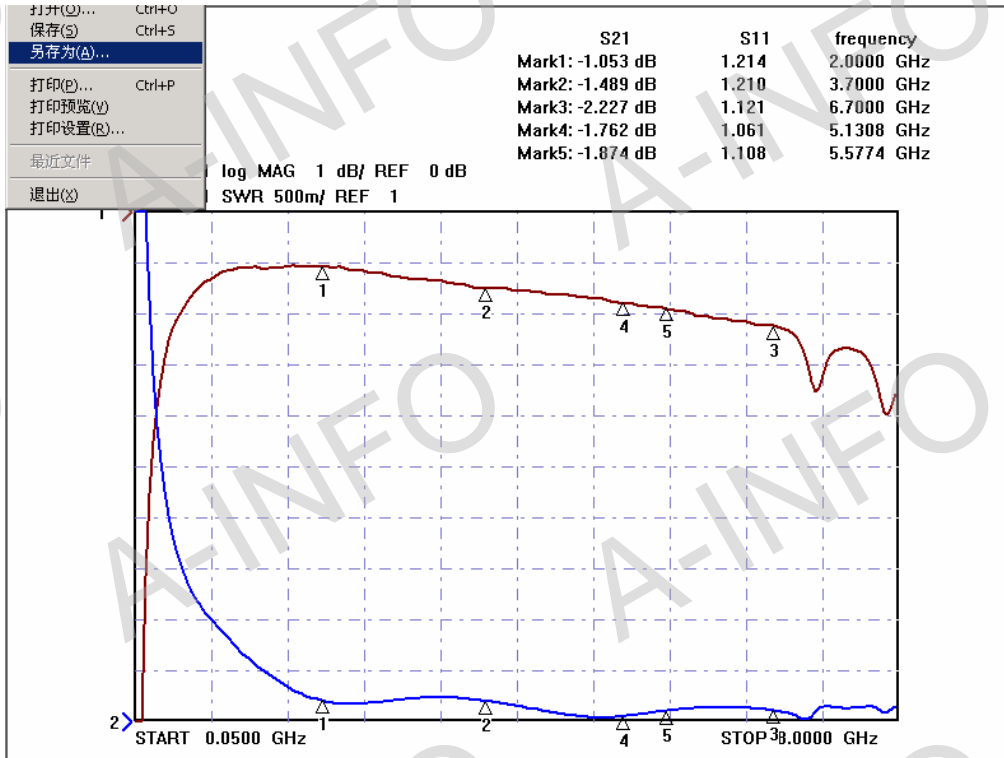

Isolation(J0-J4)

