


## Outline Drawing (Size: mm)

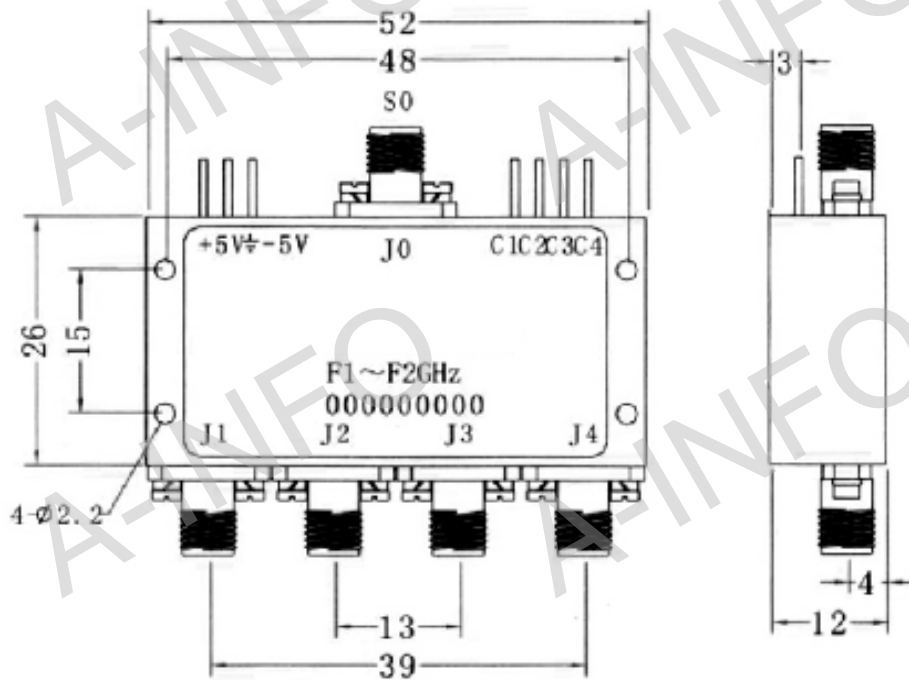

## Technical Specification

Item	Technical Specification
Frequency Range(GHz)	0.02-3
Insertion Loss(dB)	2.7 max
Isolation(dB)	60 min
Switching Speed(ns)	500 max
VSWR	2.0 max
Power Handling(W)	0.2 max, 1 Peak
Power Supply(V)	+/-5
Control	TTL, "0"on, "1"off
Operating Temperature(°C)	-55 ~ +85
Storage Temperature(°C)	-65 ~ +125
Connector	SMA-Female
Net Weight(Kg)	0.085 Around

## Test Results

Port	Insertion Loss(dB)	VSWR (Insertion Loss)	Isolation(dB)	VSWR (Isolation)
J0-J1	1.80	1.38	76	1.19
J0-J2	1.77	1.16	77	1.17
J0-J3	1.95	1.17	77	1.20
J0-J4	1.78	1.42	78	1.20