



Standards
NF C 96-315
MIL-DTL-3933

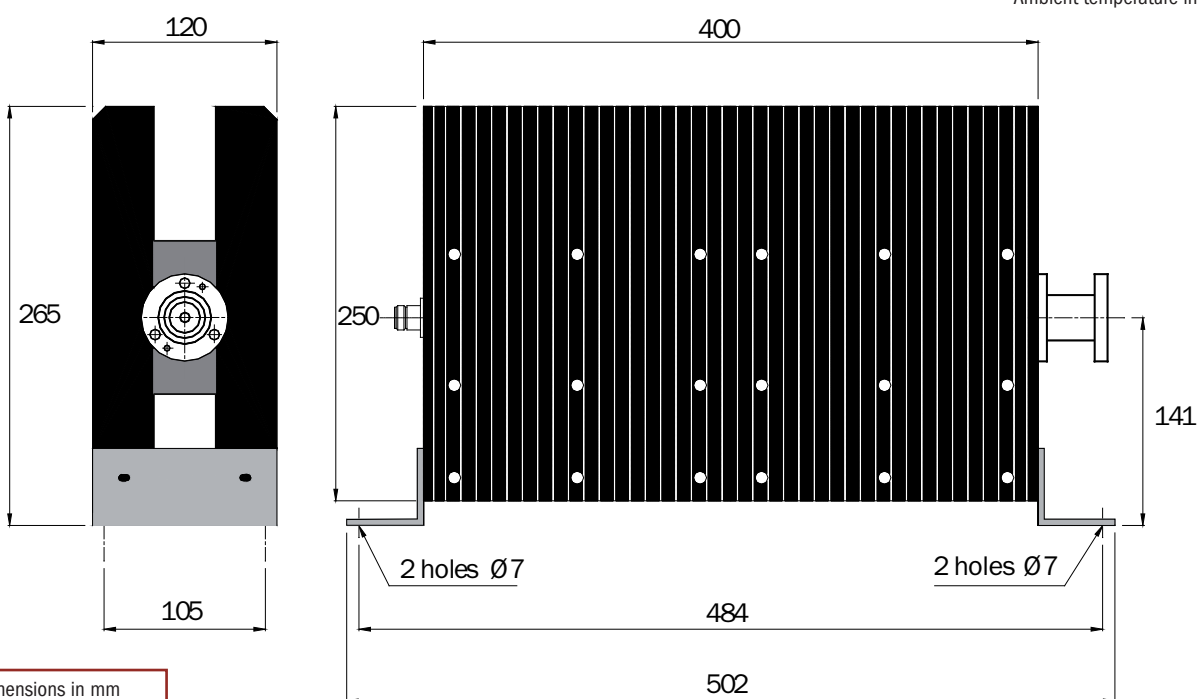

Impedance $50 \Omega \pm 5\%$
 Frequency DC - 1 GHz
 Max VSWR ≤ 1.30 at 1 GHz
 Temperature range -55 to +125°C
 Average power @ 25°C 1 kW
 Weight 15 kg



Attenuation (dB)	P/N	Connector	Accuracy $\pm \Delta \alpha$ (dB)
6	16-6816	7-16f / f	1.5
10	16-6649	N m/m	1.5
30	16-6563	EIA 7/8" - Nf	1.5
30	16-6598	N m/f	1.5
30	16-6700	7-16f / Nf	1.5
40	16-6731	N m/f	1.5
40	16-6772	N f/f	1.5
40	16-6833	7-16f / Nf	1.5
60	16-6785	7-16m / Nf	1.5

Others models on request