


Technical Specification



Polarization	H,V, LHCP and RHCP Switchable
Frequency(GHz)	0.7 - 6.0
Gain	Linear: 2-14dB Typ.
	Circular: 2-12dBic Typ.
Axial Ratio(dB) (Circular)	2.0 Typ.
	6.0 max
VSWR	2.5 Typ.
Connector	SMA-Female
Power Handling	20W CW (Cold Switching)
Power Supply	12V DC
Control	TTL
Control Connector	Circular 10-Pin
Size(mm)	310 x 310 x 535
Net Weight(Kg)	5.85 Around

Outline Drawing (Size: mm)

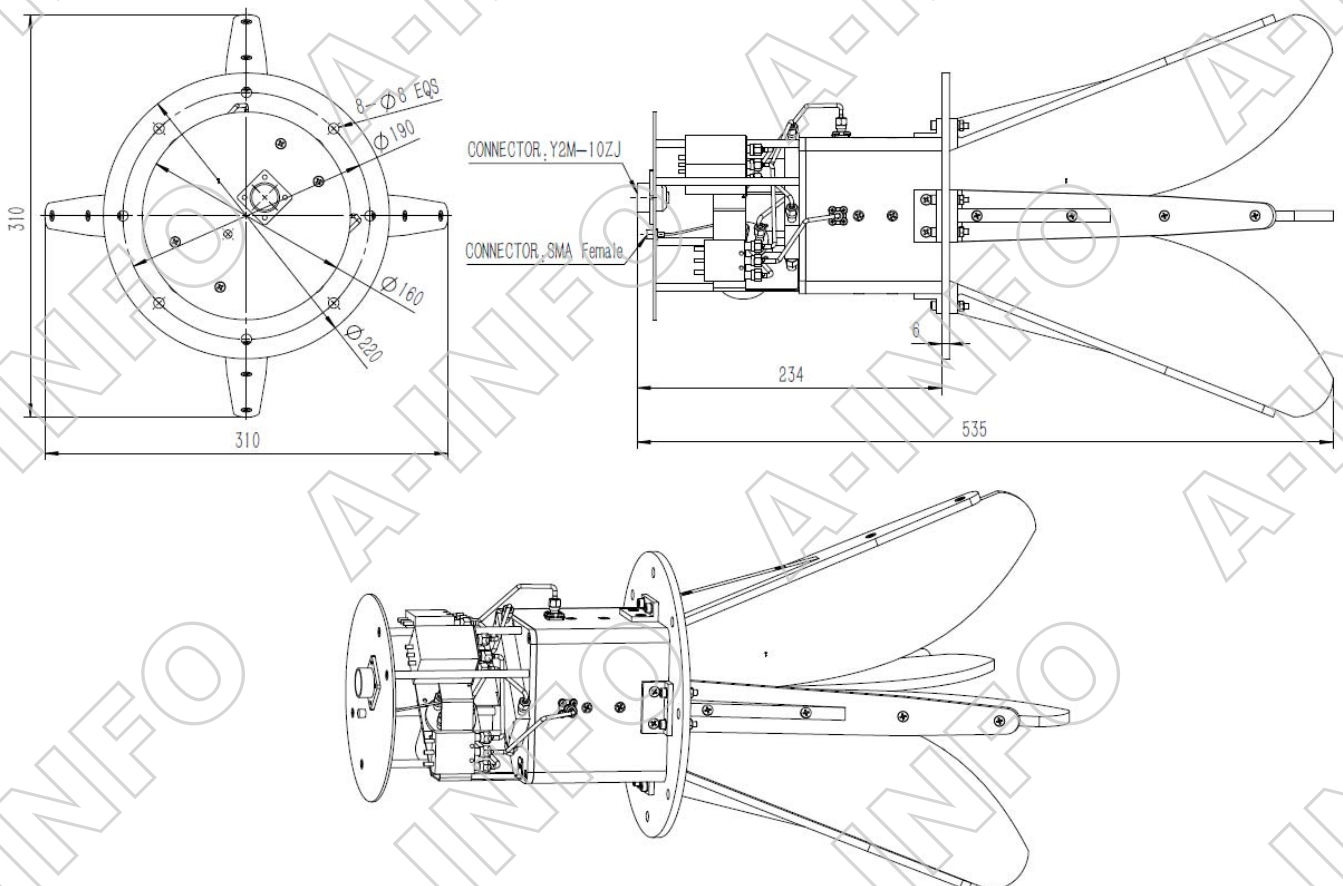

Standard Configuration

1. Antenna
2. Control Cable, 5m, with Circular 10-Pin connector on each side.

Optional Accessories

1. Nonmetallic L type mounting bracket, for A-INFO tripod
2. Aluminum Tripod, 15Kg
3. Wooden Tripod, 15Kg

Control Description

1. Pin Description

Pin Number	Name	Description
1	NC	
2	+12V	+12V DC Supply input
3	GND	Ground
4	H	Polarization control :Horizontal
5	V	Polarization control :Vertical
6	C/L	Polarization control :Circular or Linear
7	R	Polarization control :RHCP
8	L	Polarization control :LHCP
9	NC	
10	NC	

2. Function Table


Pol. \ Pin	4	5	6	7	8
V	1*	0	0	0	0
H	0	1*	0	0	0
RHCP	0	0	1*	1	0
LHCP	0	0	1*	0	1

* TTL level should be keep at "1" (high level)


Test Results

1. Gain


Linear Gain

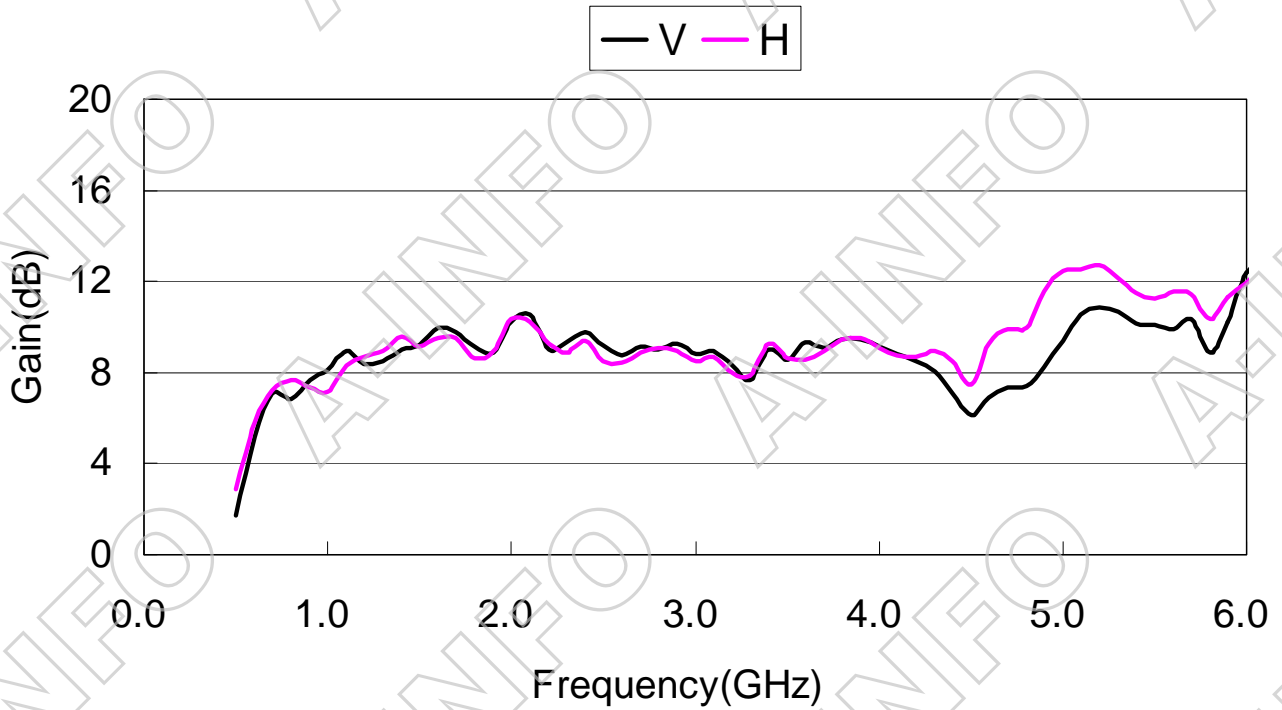


Circular Gain

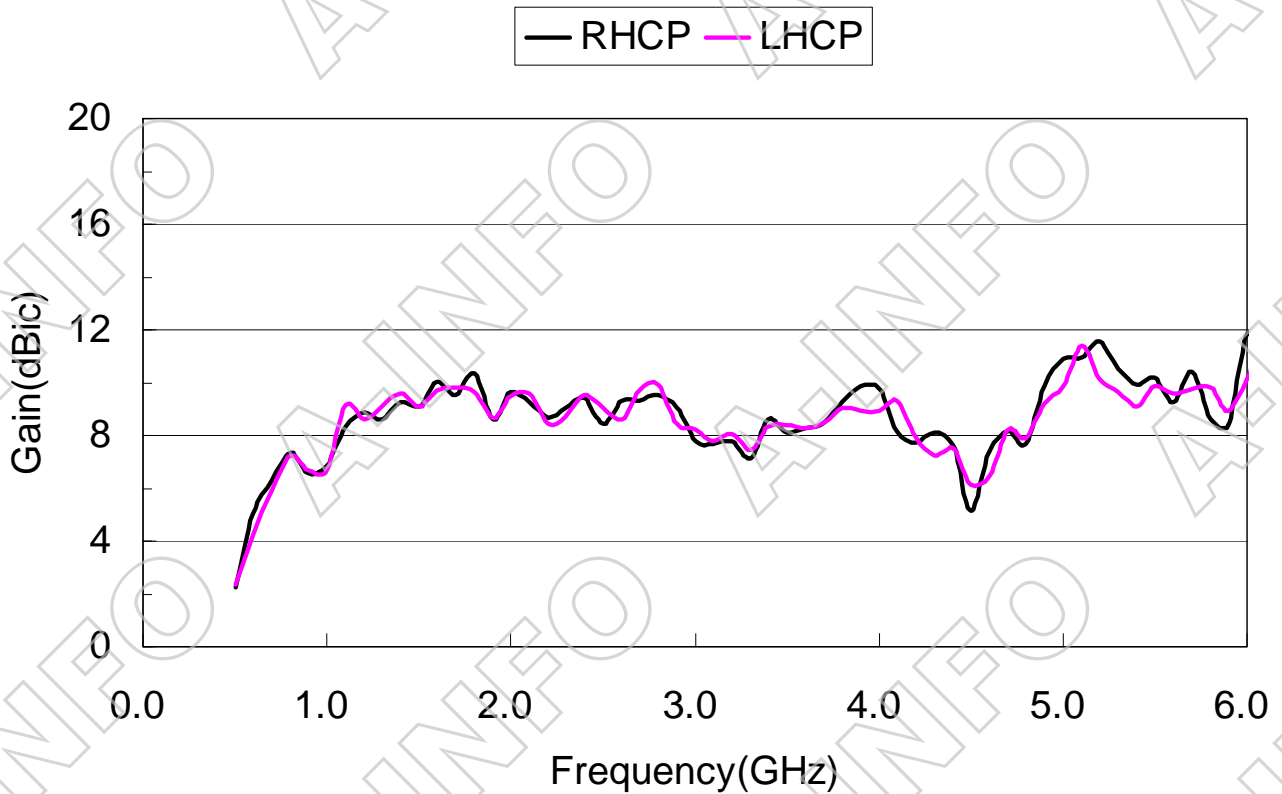


2. Axial Ratio

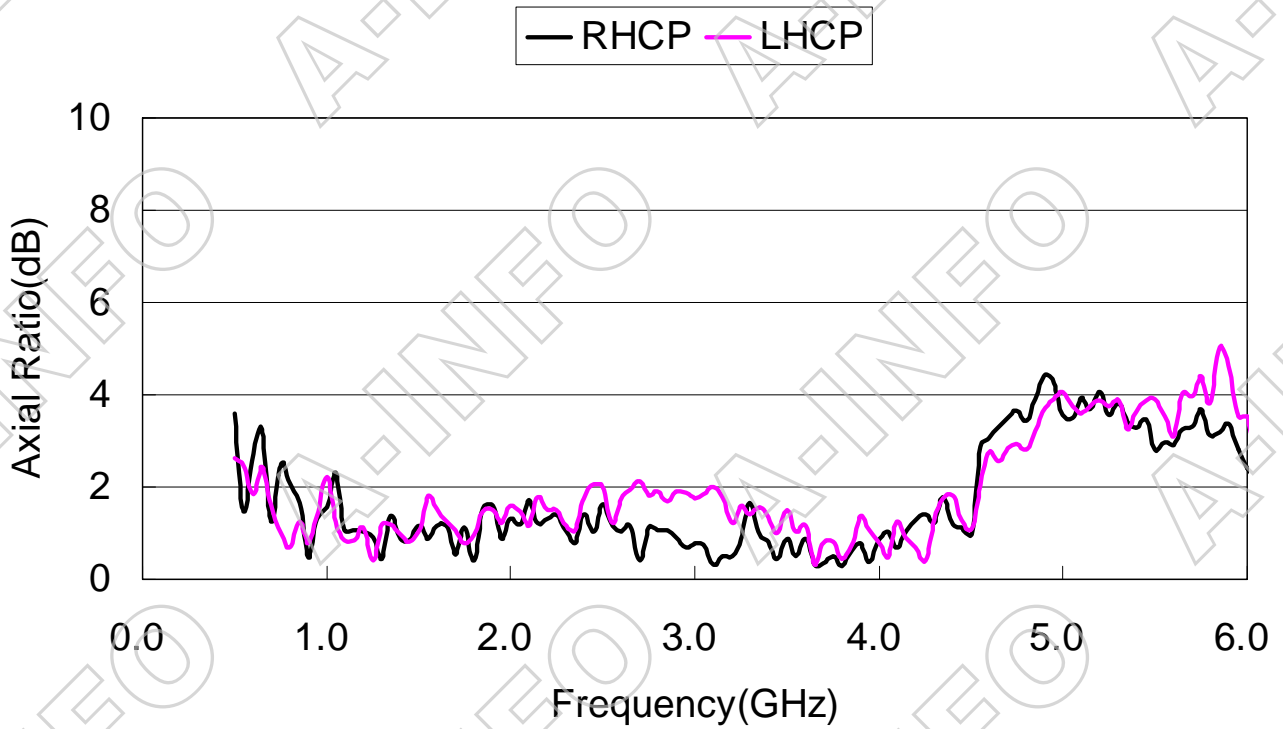


3. VSWR H Polarization

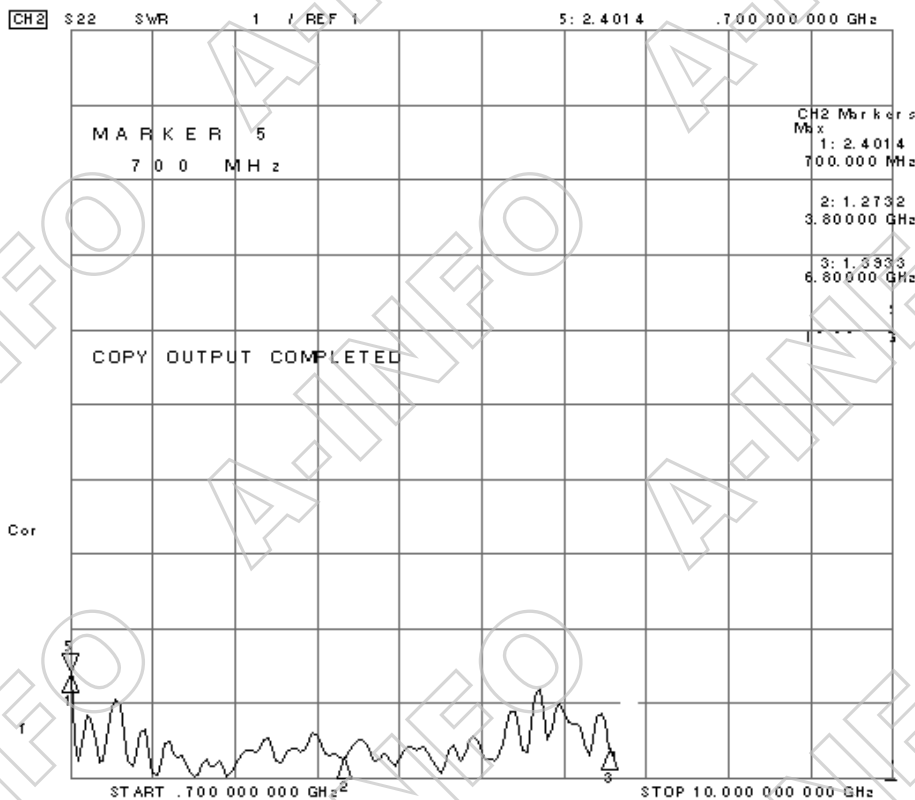


V Polarization

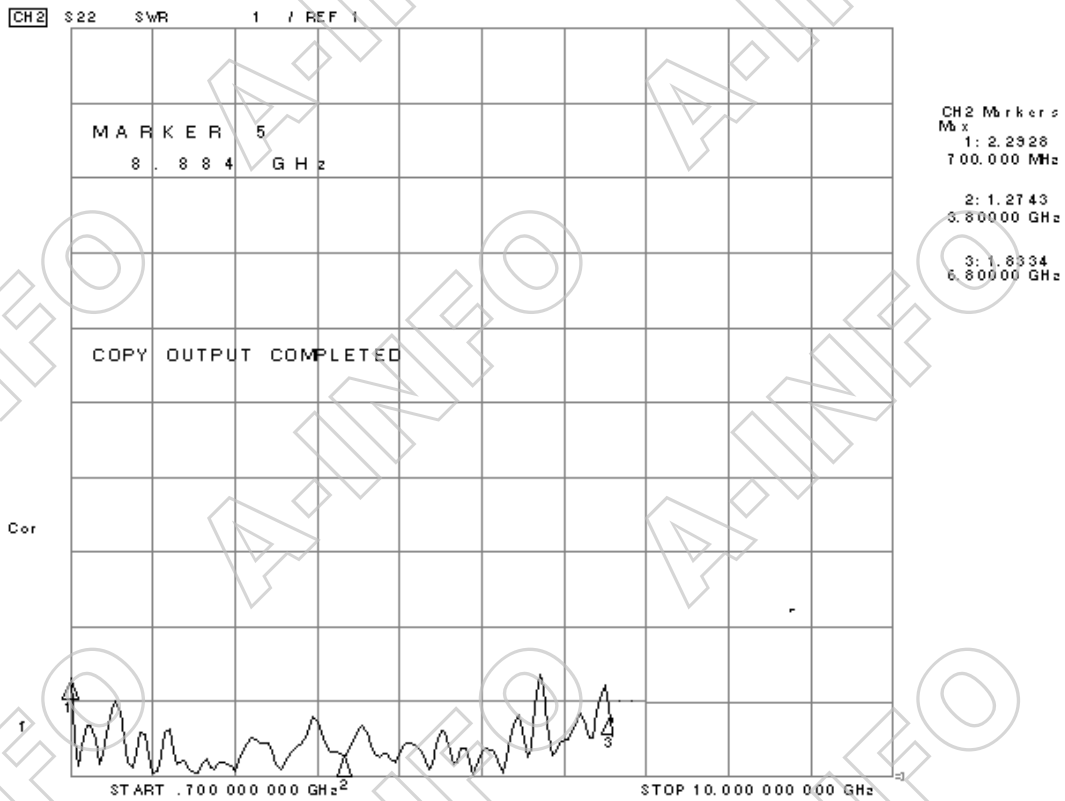

LHCP

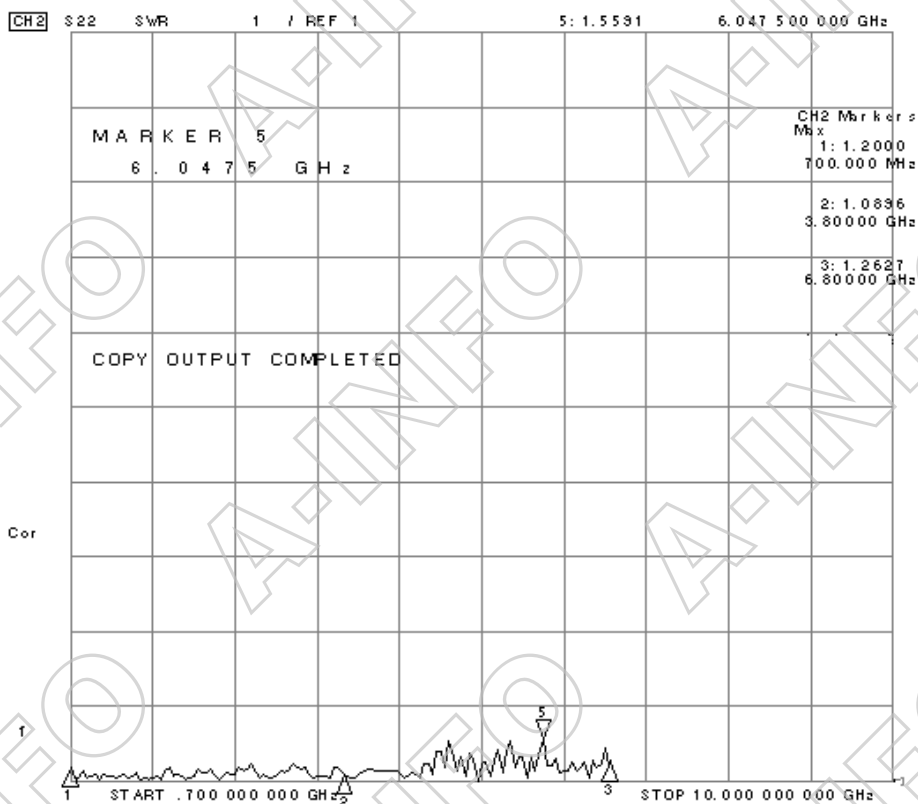



RHCP

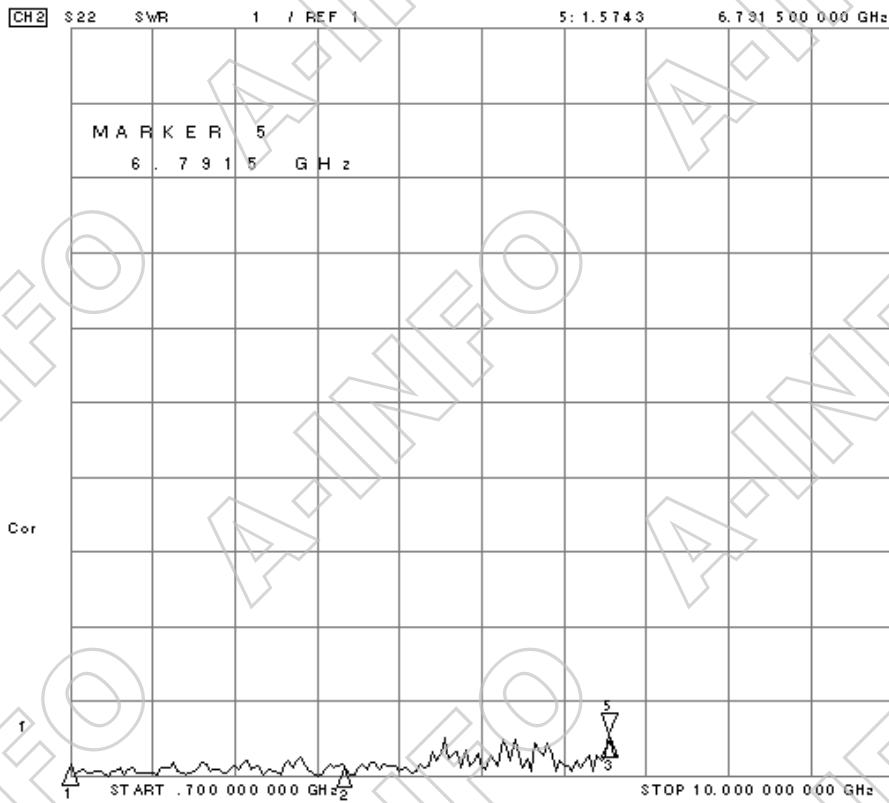


CH2 Markers
Mkx
1: 1.1541
700.000 MHz
2: 1.1219
3.80000 GHz
3: 1.5134
6.80000 GHz


4. Pattern Linear Polarization

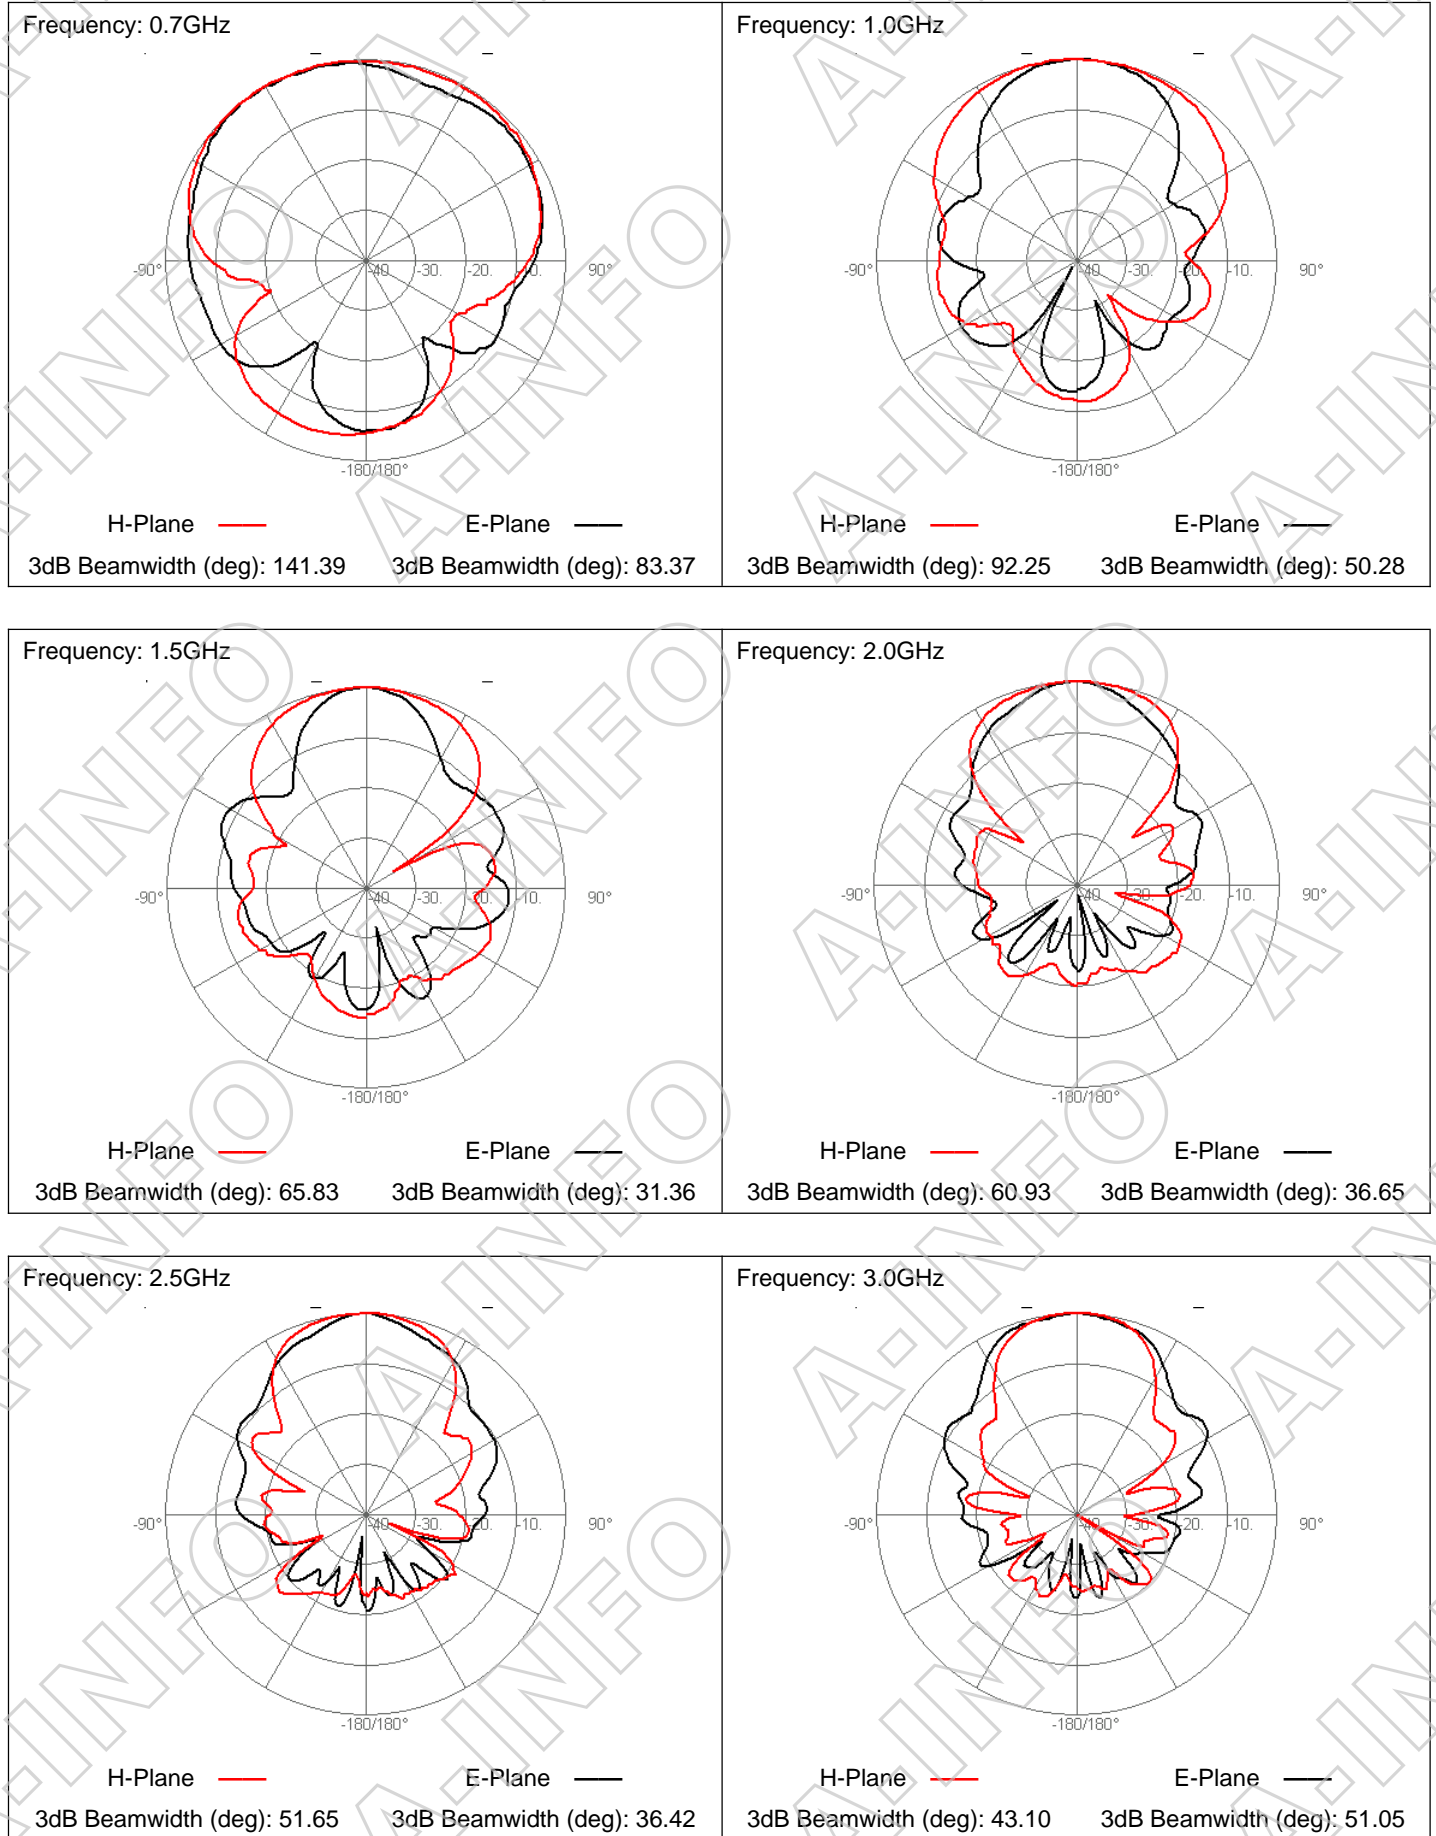

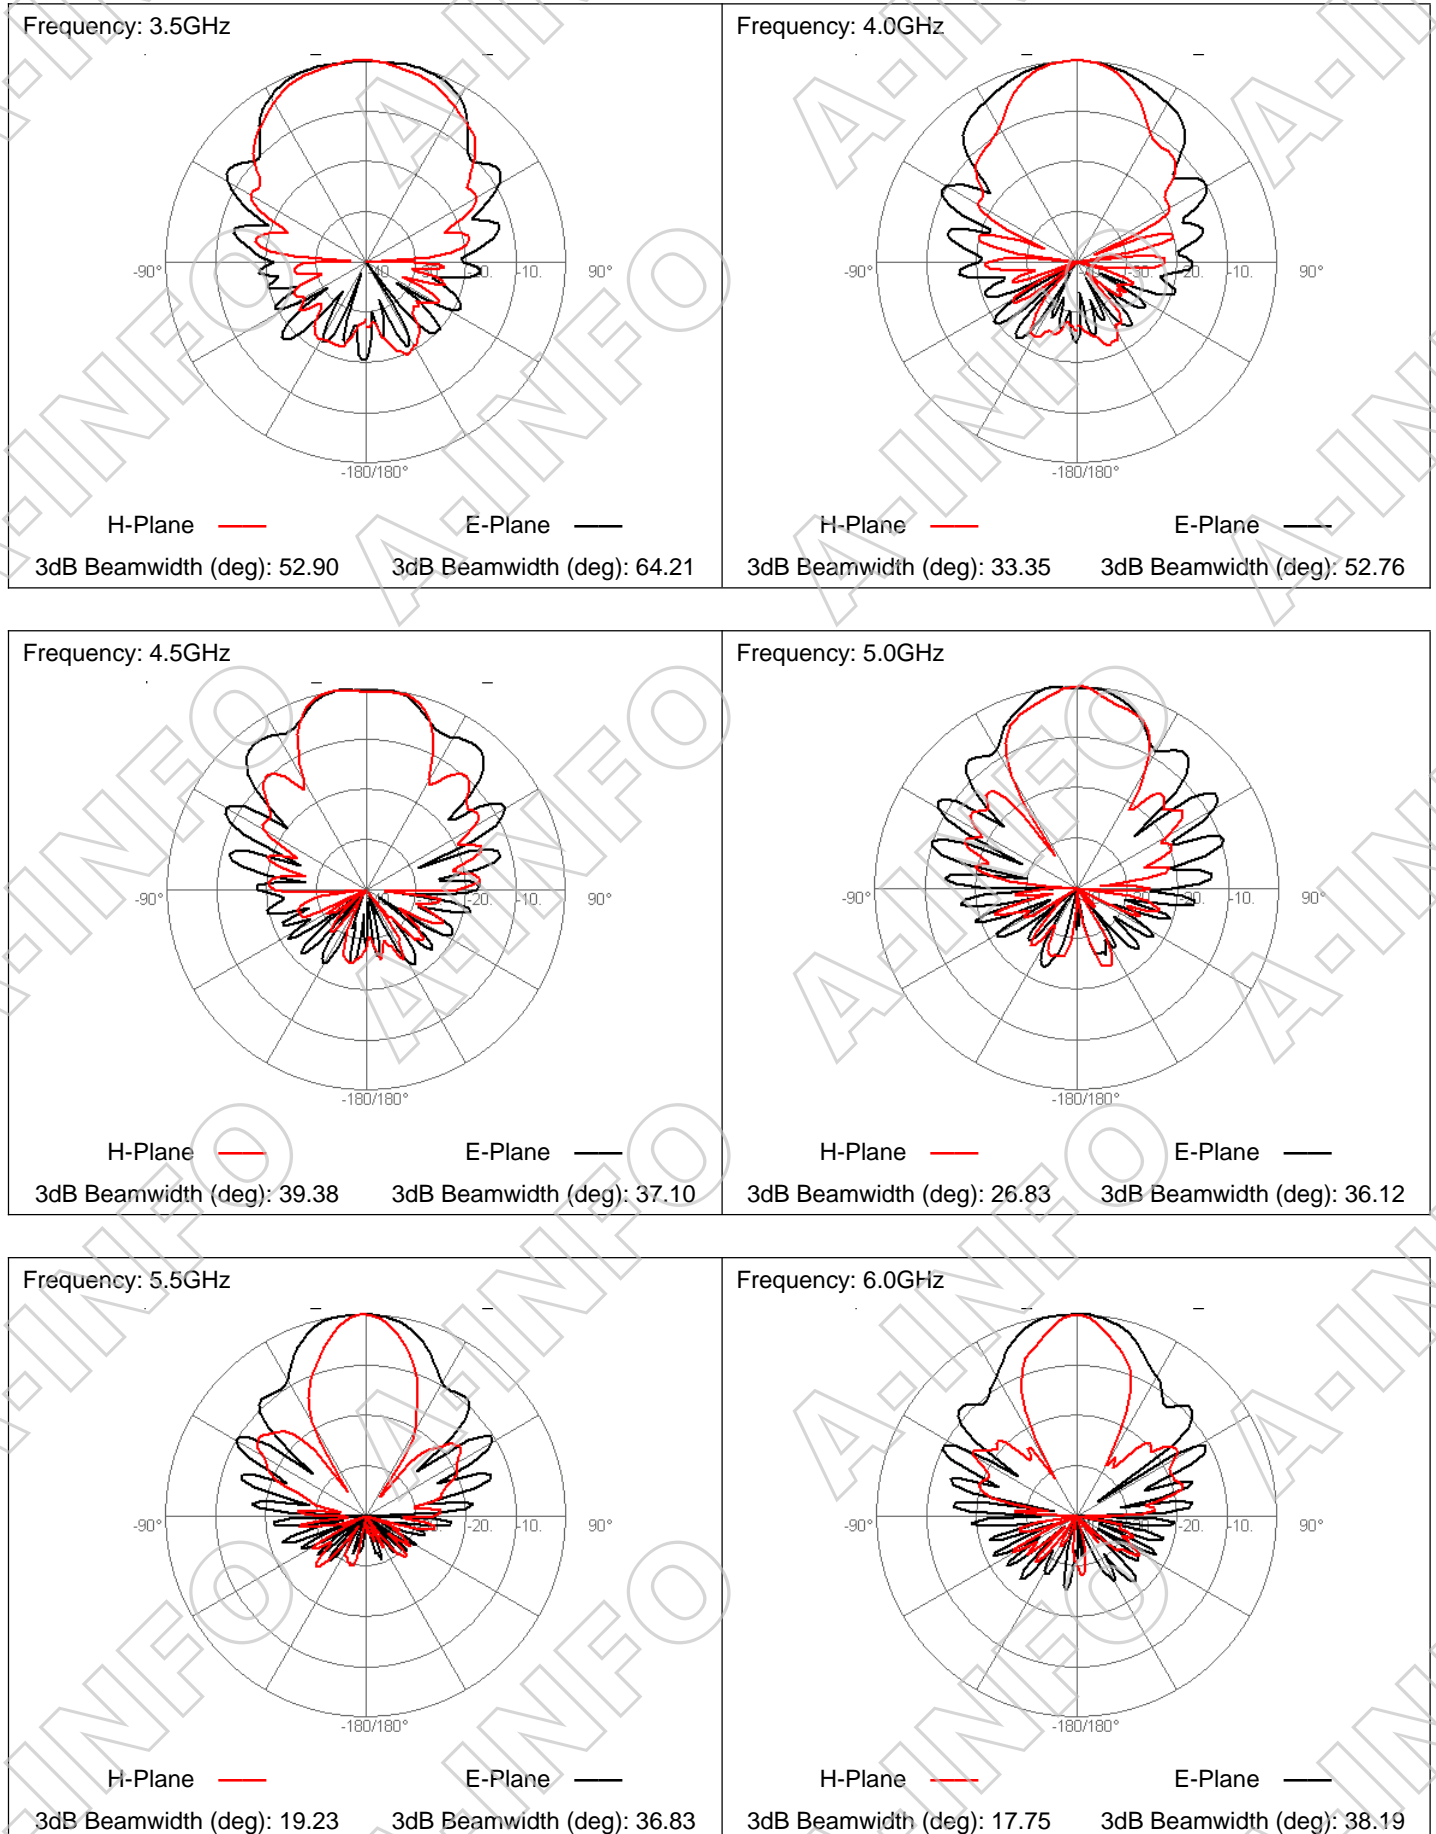

LHCP

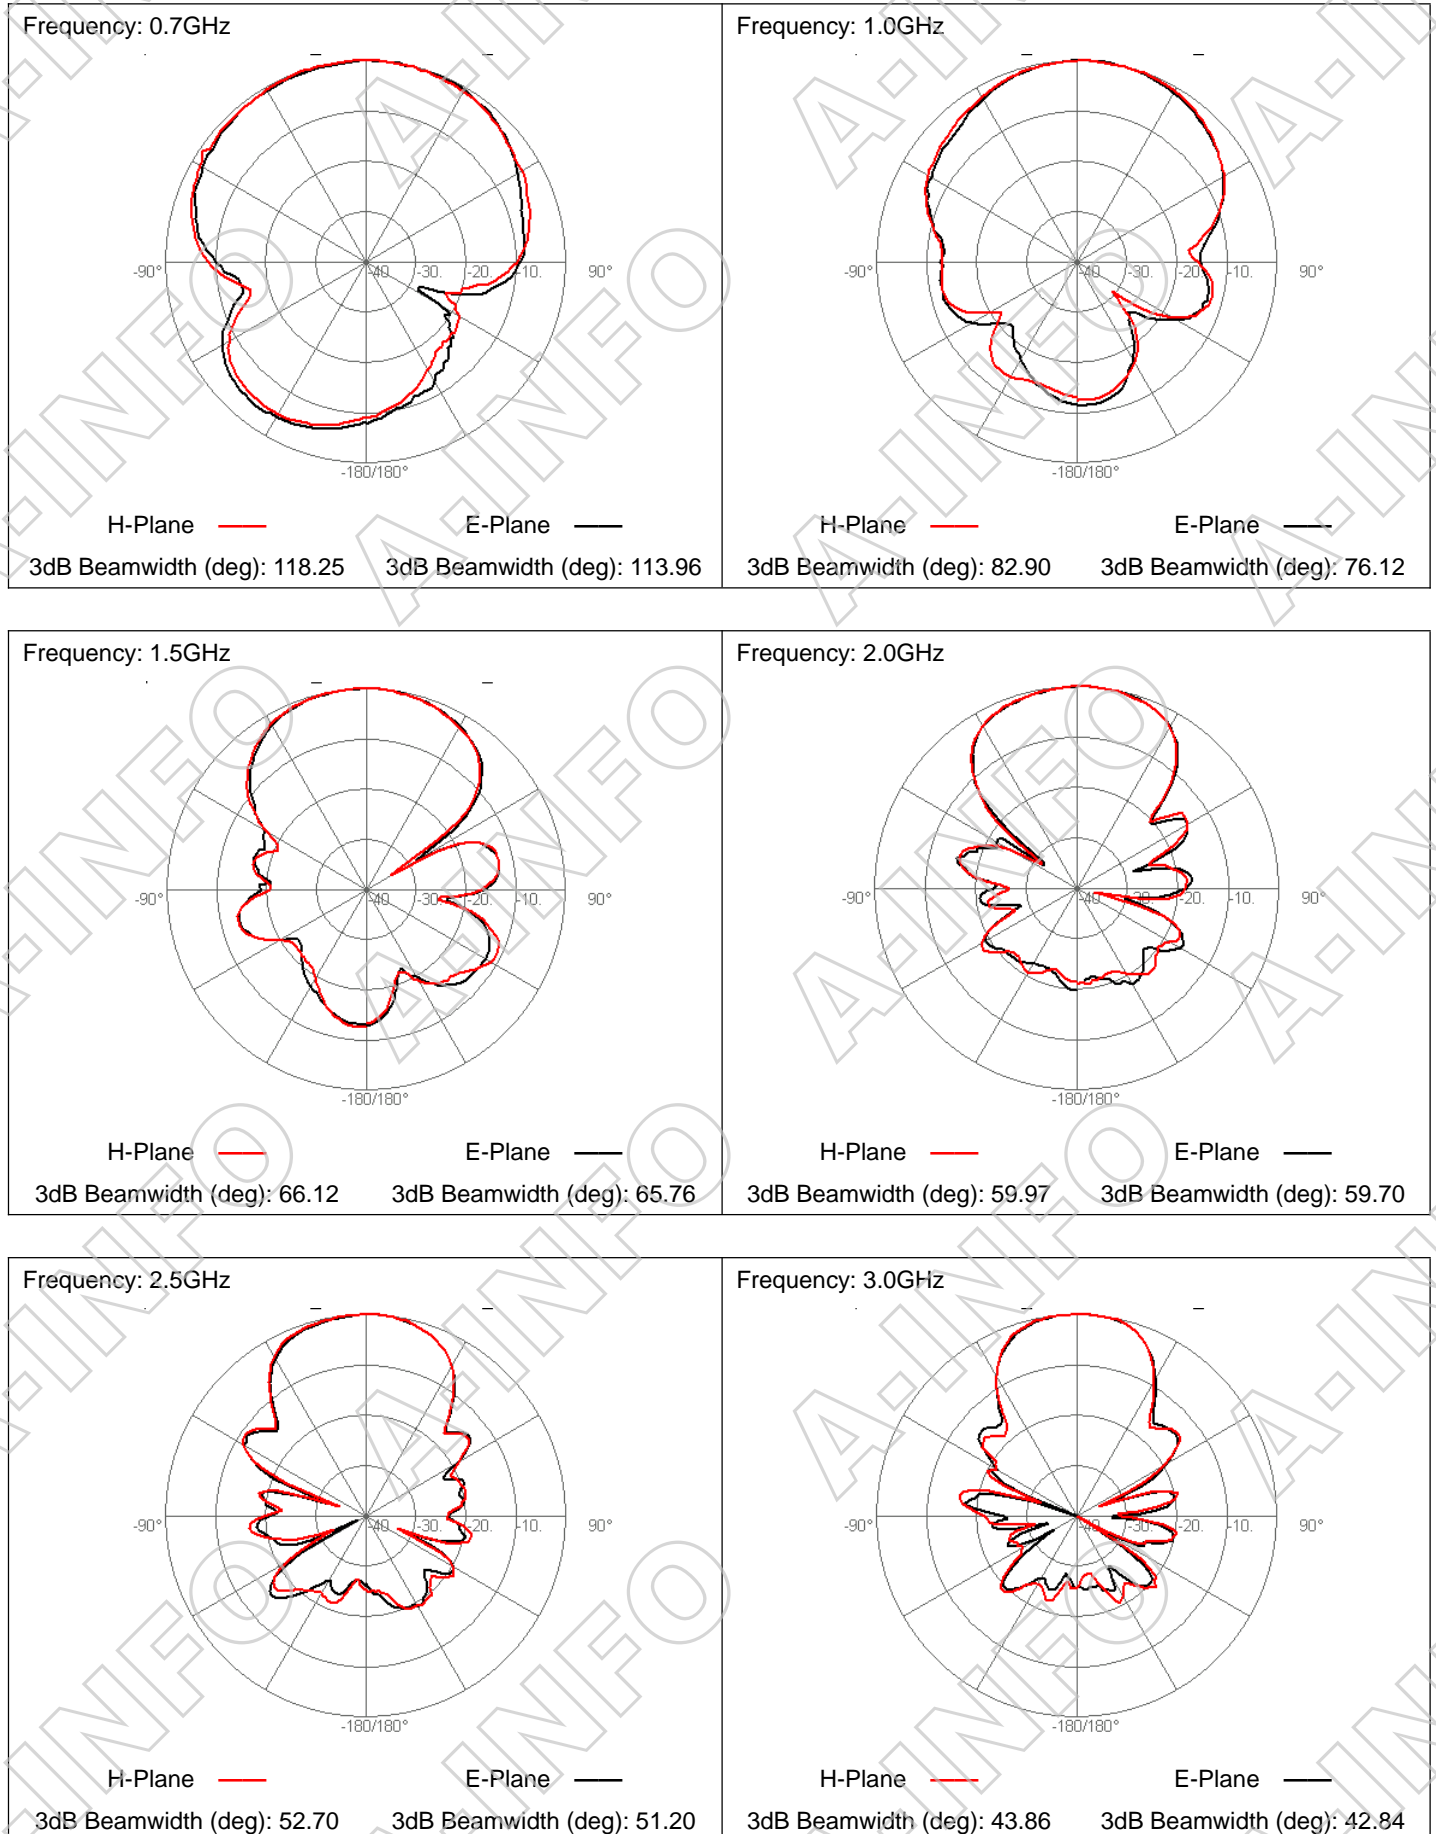

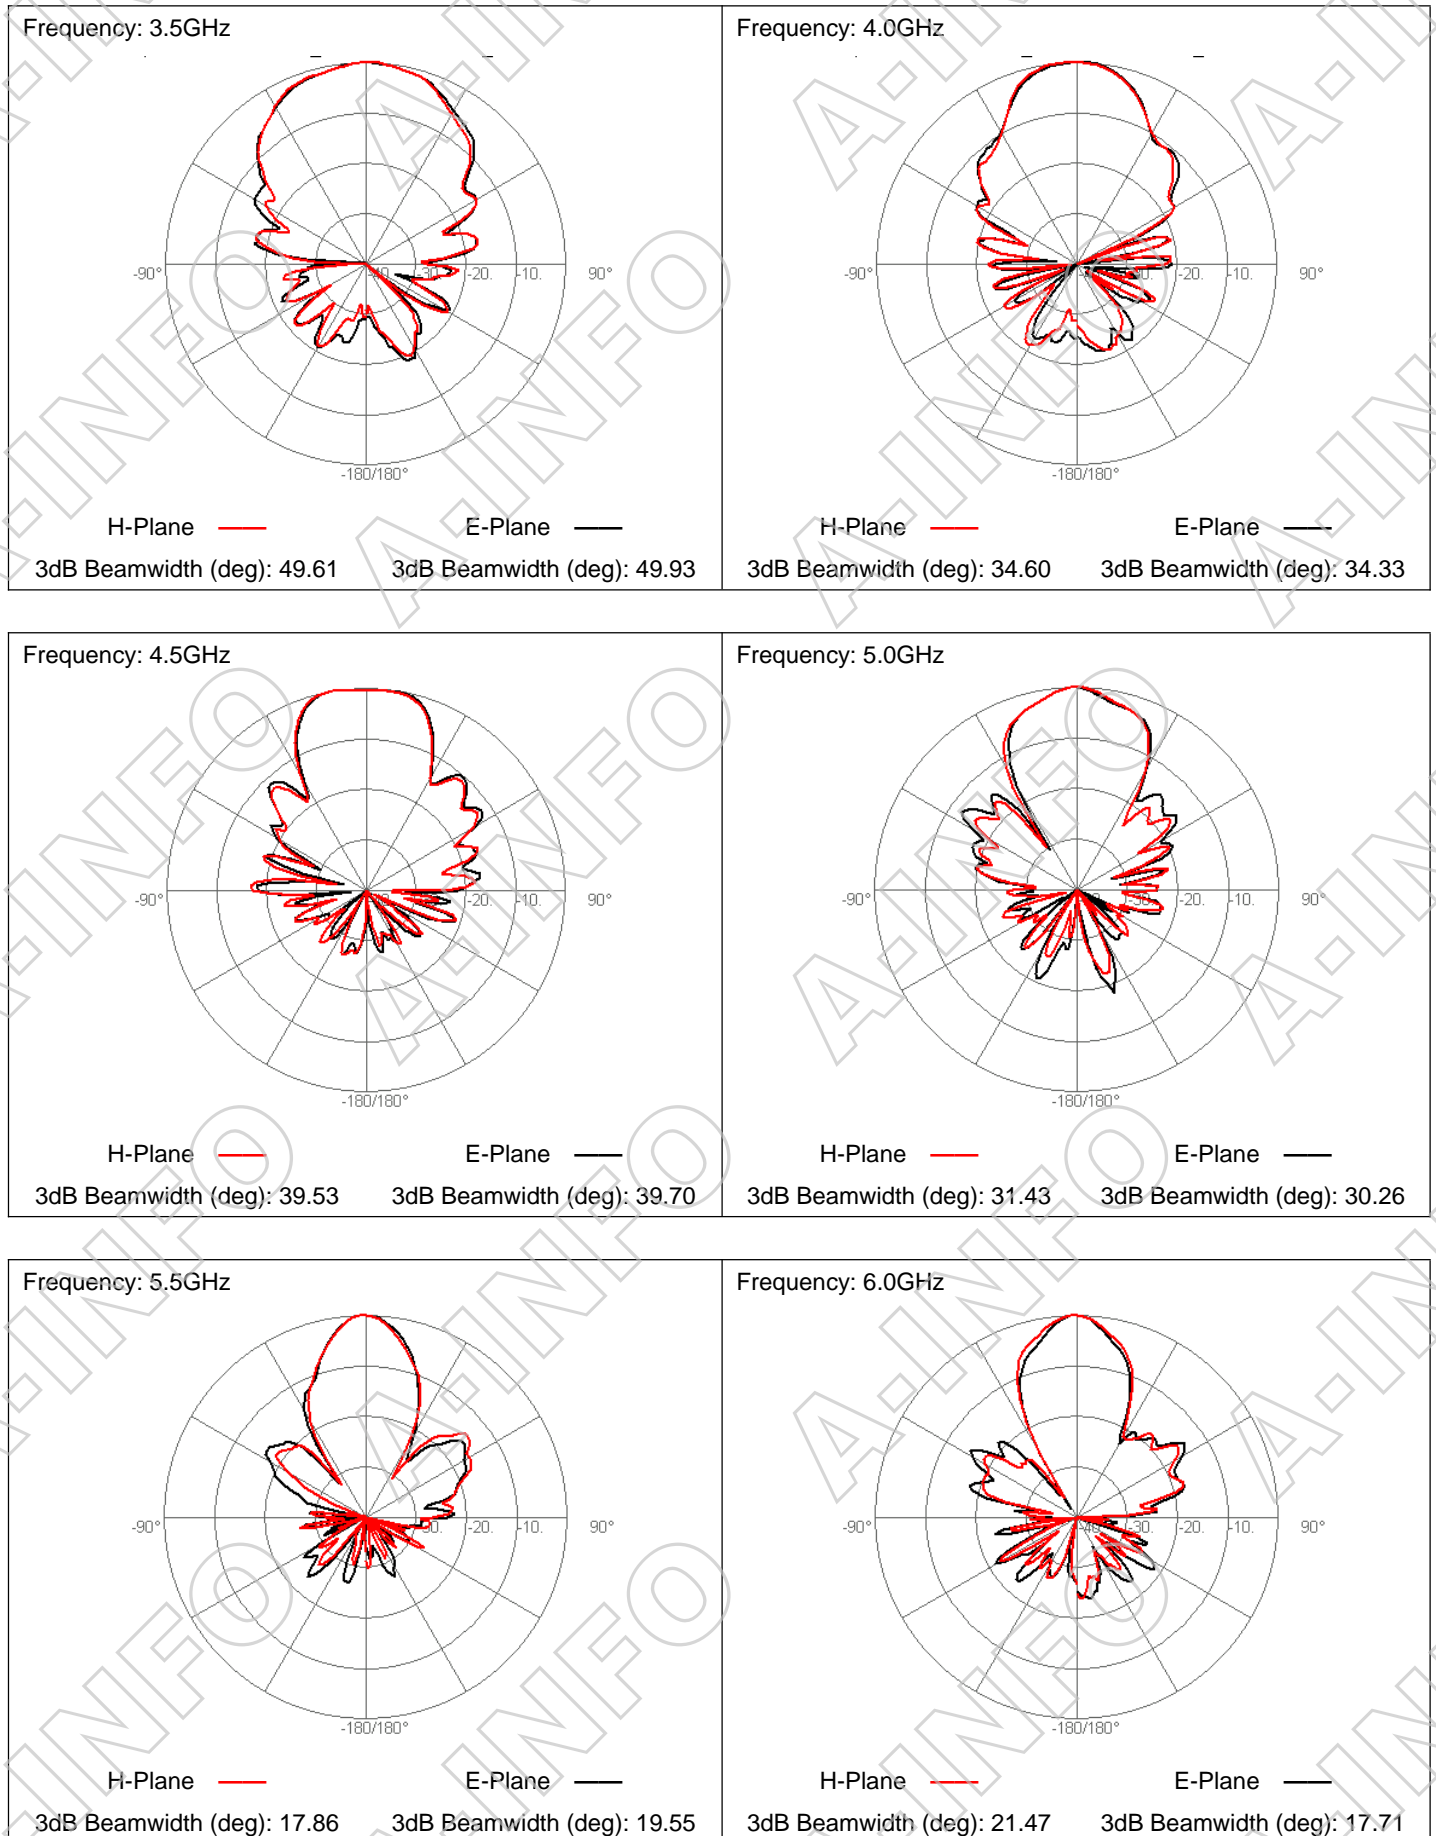

RHCP

