






Standards
NF C 96-315
MIL-DTL-3933

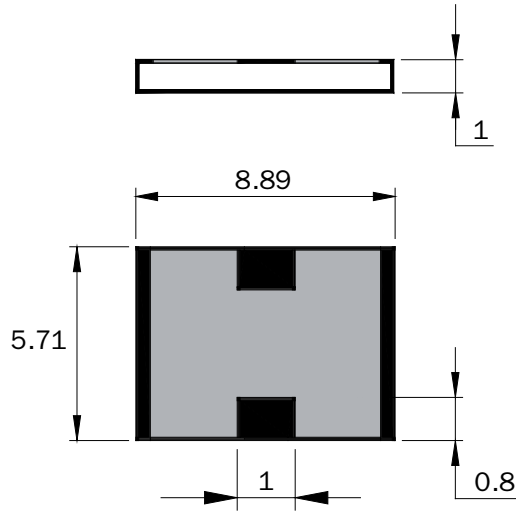

Substrate	AlN
Resistive film	Thick film
Protection film	Epoxy
Contacts finition	Silver over Nickel barrier

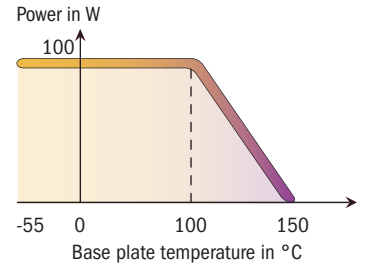

Dimensions in mm

P/N	Attenuation* (dB)	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR	Accuracy $\pm\Delta\alpha$ (dB)
45-0044Y	20	3	100	50	1.20	0.5
45-0067Y	25	3	100	50	1.20	1.5
45-0043Y	30	3	100	50	1.20**	1.5***

mm	inch
0.8	0.032
1	0.040
5.71	0.225
8.89	0.350

* Others values on request
 ** VSWR ≤ 1.20 at 2.5 GHz
 *** $\pm\Delta\alpha$ (dB) ≤ 1.5 at 2.5 GHz

Available on Tap and Reel Packaging

