


## Outline Drawing (Size: mm)

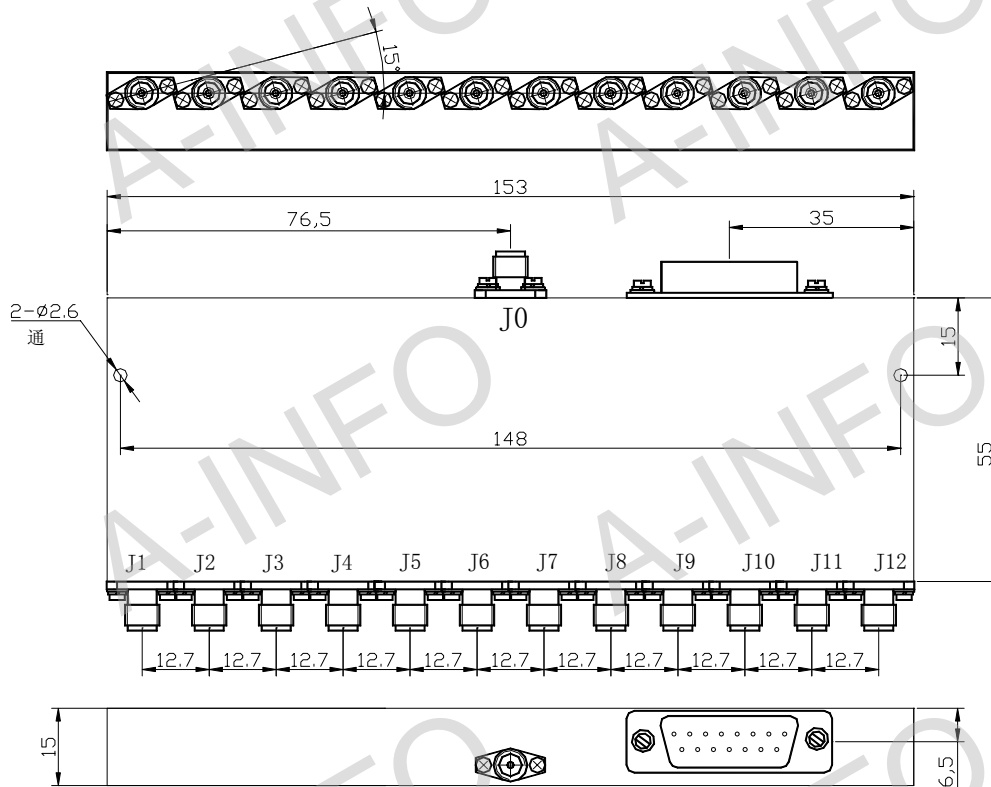

## Technical Specification

Item	Technical Specification
Frequency Range(GHz)	12-18
Insertion Loss(dB)	6.0 max
Isolation(dB)	60 min
VSWR	2.5 max
Switching Speed(ns)	50
Power handling(W)	0.2
Connector	SMA -Female
Operating Temperature(°C)	-55 ~ +85
Storage Temperature(°C)	-65 ~ +125

## Test Results

Port	Insertion Loss(dB)	Input VSWR	Output VSWR	Isolation (dB)
J0-J1	5.92	2.32	1.84	62
J0-J2	5.45	1.92	1.78	65
J0-J3	5.42	1.88	1.75	65
J0-J4	5.84	2.25	1.86	62
J0-J5	5.72	2.12	1.82	62
J0-J6	5.35	1.95	1.78	65
J0-J7	5.32	1.88	1.75	65
J0-J8	5.80	2.25	1.83	62
J0-J9	5.72	2.12	1.94	62
J0-J10	5.31	1.82	1.73	65
J0-J11	5.42	2.13	2.10	65
J0-J12	5.84	2.22	2.12	62