

5W – N DC-8GHz Coaxial Attenuator

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA5AN8A1	DC-8GHz	5W	1 dB	±0.5 dB	1.3	N-M / N-F	50 Ω
UIYCA5AN8A2	DC-8GHz	5W	2 dB	±0.5 dB	1.3	N-M / N-F	50 Ω
UIYCA5AN8A3	DC-8GHz	5W	3 dB	±0.5 dB	1.3	N-M / N-F	50 Ω
UIYCA5AN8A5	DC-8GHz	5W	5 dB	±0.5 dB	1.3	N-M / N-F	50 Ω
UIYCA5AN8A6	DC-8GHz	5W	6 dB	±0.5 dB	1.3	N-M / N-F	50 Ω
UIYCA5AN8A10	DC-8GHz	5W	10 dB	±0.5 dB	1.3	N-M / N-F	50 Ω
UIYCA5AN8A15	DC-8GHz	5W	15 dB	±0.5 dB	1.3	N-M / N-F	50 Ω
UIYCA5AN8A20	DC-8GHz	5W	20 dB	±0.5 dB	1.3	N-M / N-F	50 Ω
UIYCA5AN8A30	DC-8GHz	5W	30 dB	±0.8 dB	1.3	N-M / N-F	50 Ω
UIYCA5AN8A40	DC-8GHz	5W	40 dB	±1.5 dB	1.3	N-M / N-F	50 Ω

- ² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the information below when inquiring and mark * is required.
 * 1. Power handling, Attenuation Value
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

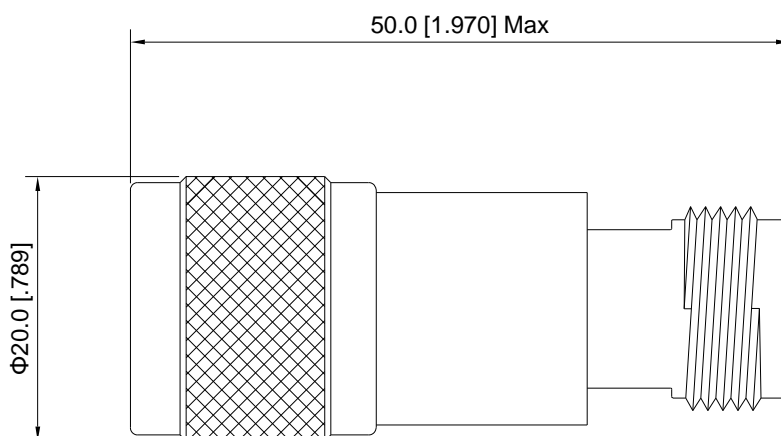

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiy.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiy.com