

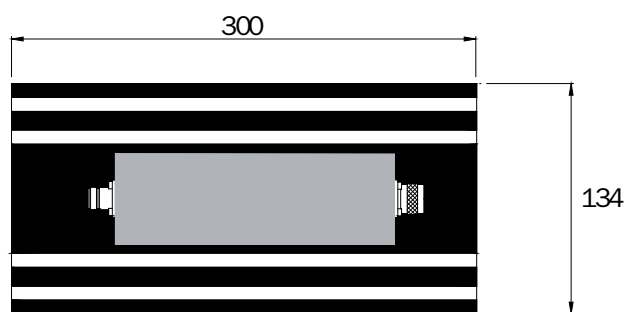



Standards
NF C 96-315
MIL-DTL-3933

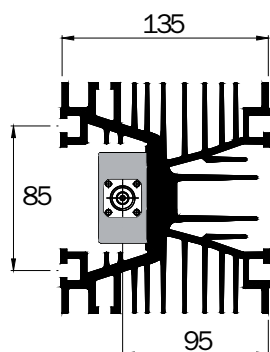

Impedance 50 Ω ± 5%
 Frequency DC - 1 GHz
 Max VSWR ≤ 1.30 at 1 GHz
 Temperature range -55 to +125°C
 Average power @ 25°C 400 W
 Weight 5.5 kg



10 - 20 - 30 - 40 dB

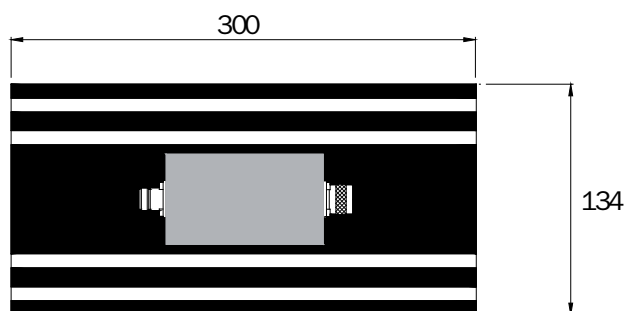

3 - 6 dB

Dimensions in mm

Attenuation (dB)	P/N	Connector	Accuracy ±Δα (dB)
3	16-5281	N m/f	0.6
6	16-5282	N m/f	0.6
6	16-6815	N f/f	0.6
10	16-5283	N m/f	1
20	16-3976	N m/f	1
30	16-4170	N m/f	1.2
40	16-4261	N m/f	1.5

Model available with 7-16 connector
 Others attenuations on request