


112WLPL_BE WR112 Waveguide Low Power Load 7.05-10GHz with Rectangular Waveguide Interface

WR112 Waveguide Low Power Load Operating From 7.05 to 10GHz with Rectangular Waveguide Interface

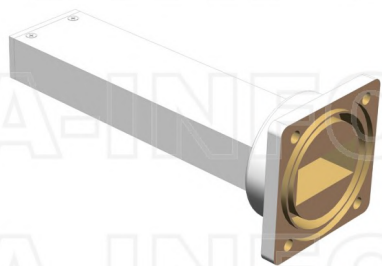

Product Information

SKU	112WLPL_BE
-----	------------

Description

Waveguide low power load 112WLPL_BE, operating from 7.05 to 10GHz and low VSWR 1.03:1. 112WLPL_BE covers the WR112 sub waveguide band and comes with one flange FBE84(CBR84). It can handle 4W continuously and 4KW peak power. The WLPL series are for general version, low VSWR terminations for system application. The typical applications include system or test bench set-ups and small moderate power dummy loads.

Technical Specification

Electrical Specification		Mechanical Specification	
WG Load Type	Low Power	Body Material	Al
Waveguide Band	C X	Size, L (mm)	127
Waveguide Type	Rectangular	Size, W (mm)	45.7
Waveguide Size EIA WR	WR112	Size, H (mm)	45.7
Frequency, Min (GHz)	7.05	Weight, (kg)	0.14
Frequency, Max (GHz)	10	Pressure Sealed	No
VSWR, Typ	1.025:1	Environmental Specification	
VSWR, Max	1.03:1	Operating Temp. Low (°C)	-55
Power Handling, CW, (W)	4	Operating Temp. High (°C)	85
Power Handling, Peak, (KW)	4	Storage Temp. Low (°C)	-60
		Storage Temp. High (°C)	90
Interface			
Flange Style	Square		
Flange Type	Choked		
Flange Designation	FBE84(CBR84)		

Additional Information

Application	General Purpose Indoor & Outdoor, Fixed
-------------	---

About this Datasheet

<ul style="list-style-type: none"> ● Product Information Product Link: https://www.ainfoinc.com/112wlp1-be-wr112-waveguide-low-power-load-7-05-10-ghz-fbe84-cbr84 Data subject to change without notice. © A-INFO INC. 2024. All Rights Reserved 	<ul style="list-style-type: none"> ● Contact Us Address: 60 Tesla, Irvine, CA 92618, USA Website: www.ainfoinc.com Email: sales@ainfoinc.com 	<ul style="list-style-type: none"> ● Phone & Fax Phone: +1-949-639-9688 +1-949-639-9608 Fax: +1-949-639-9670
---	--	--