


Outline Drawing (Size: mm)

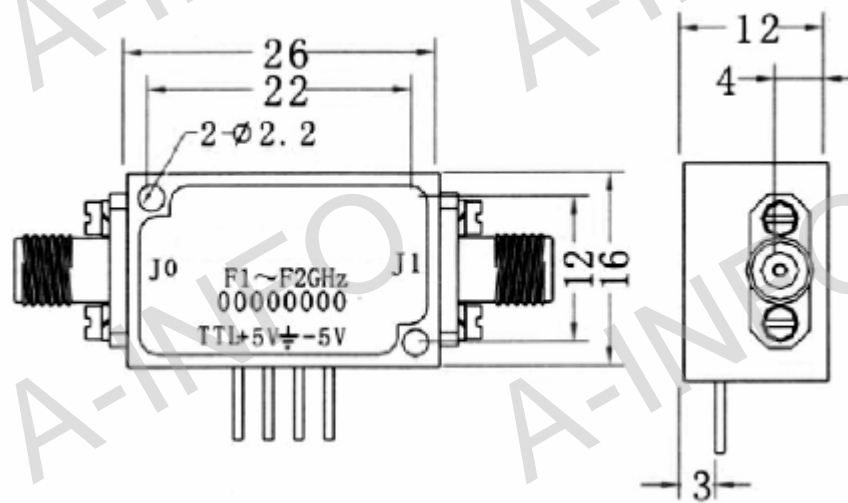

Technical Specification

Item	Technical Specification
Frequency Range(GHz)	12.0-18.0
Insertion Loss(dB)	3.2 max
Isolation(dB)	60 min
VSWR	2.0 max
Switching Speed(ns)	50 max
Power Handling(W)	0.2 max
Connector	SMA-Female
Operating Temperature(°C)	-55 ~ + 85
Storage Temperature(°C)	-65 ~ +125
Net Weight(Kg)	0.02 Around

Test Results

Insertion Loss (dB)	VSWR	Isolation(dB)
2.43	1.48	74.3