


Outline Drawing (Size: mm)

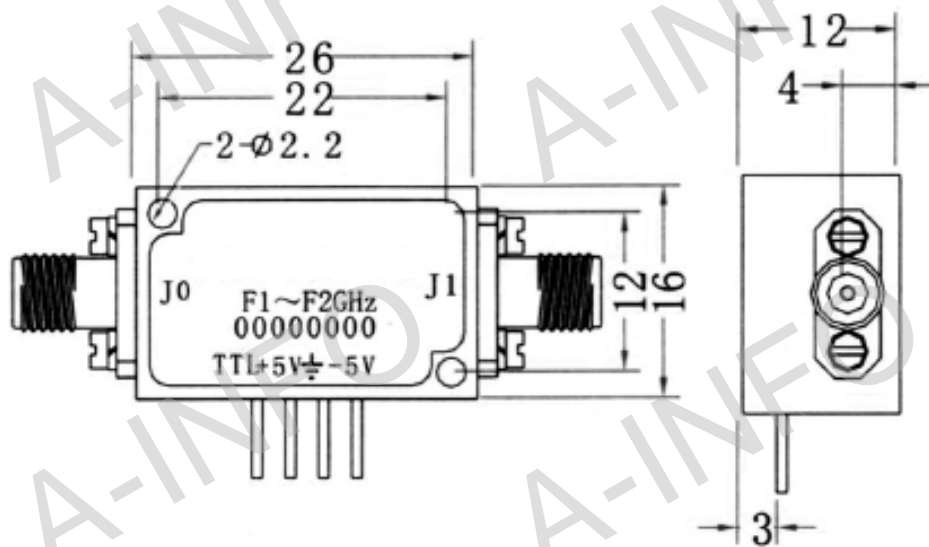

Technical Specification

Item	Technical Specification
Frequency Range(GHz)	0.02-0.5
Insertion Loss(dB)	1.4 max
Isolation(dB)	80 min
VSWR	1.5 max
Switching Speed(ns)	500 max
Control	TTL,"0" on, "1" off
Power Handling(W)	0.2-1 max
Power Supply(V)	+/-5
Connector	SMA-Female
Operating Temperature(°C)	-55 ~ +85
Storage Temperature(°C)	-65 ~ +125
Net Weight(Kg)	0.02 Around

Test Condition

IF bandwidth: 100Hz, Input Power: 0dBm, Power Supply: +/-5V

Test Results

Insertion Loss(dB)	VSWR	Isolation(dB)
0.95	1.30	90