


430WLPL_DM WR430 Waveguide Low Power Load 1.7-2.6GHz with Rectangular Waveguide Interface

WR430 Waveguide Low Power Load Operating From 1.7 to 2.6GHz with Rectangular Waveguide Interface

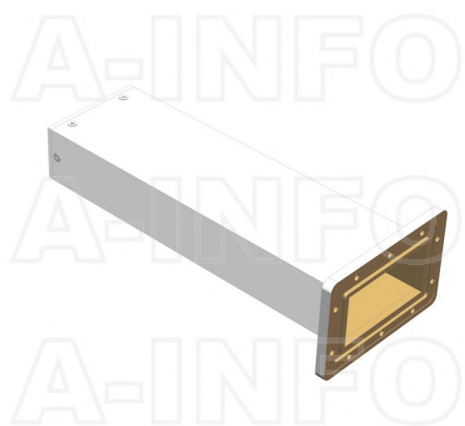

Product Information

SKU	430WLPL_DM
-----	------------

Description

Waveguide low power load 430WLPL_DM, operating from 1.7 to 2.6GHz and low VSWR 1.05:1 430WLPL_DM covers the WR430 sub waveguide band and comes with one flange FDM22(PDR22). It can handle 15W continuously and 15KW peak power. The WLPL series are for general version, low VSWR terminations for system application. The typical applications include system or test bench set-ups and small moderate power dummy loads.

Technical Specification

Electrical Specification		Mechanical Specification	
WG Load Type	Low Power	Body Material	Al
Waveguide Band	S	Size, L (mm)	376
Waveguide Type	Rectangular	Size, W (mm)	161.1
Waveguide Size EIA WR	WR430	Size, H (mm)	106.4
Frequency, Min (GHz)	1.7	Weight, (kg)	2.3
Frequency, Max (GHz)	2.6	Pressure Sealed	No
VSWR, Typ	1.04:1	Environmental Specification	
VSWR, Max	1.05:1	Operating Temp. Low (°C)	-55
Power Handling, CW, (W)	15	Operating Temp. High (°C)	85
Power Handling, Peak, (KW)	15	Storage Temp. Low (°C)	-60
Interface		Storage Temp. High (°C)	90
Flange Style	Rectangular		
Flange Type	Grooved		
Flange Designation	FDM22(PDR22)		

Additional Information

Application	General Purpose Indoor & Outdoor, Fixed
-------------	---

About this Datasheet

<ul style="list-style-type: none"> ● Product Information Product Link: https://www.ainfoinc.com/430wpl-dm-wr430-waveguide-low-power-load-1-7-2-6-ghz-fdm22-pdr22 Data subject to change without notice. © A-INFO INC. 2024. All Rights Reserved 	<ul style="list-style-type: none"> ● Contact Us Address: 60 Tesla, Irvine, CA 92618, USA Website: www.ainfoinc.com Email: sales@ainfoinc.com 	<ul style="list-style-type: none"> ● Phone & Fax Phone: +1-949-639-9688 +1-949-639-9608 Fax: +1-949-639-9670
---	--	--