


▪ **Outline Dimension Drawing**

Dimensions: mm[inch]

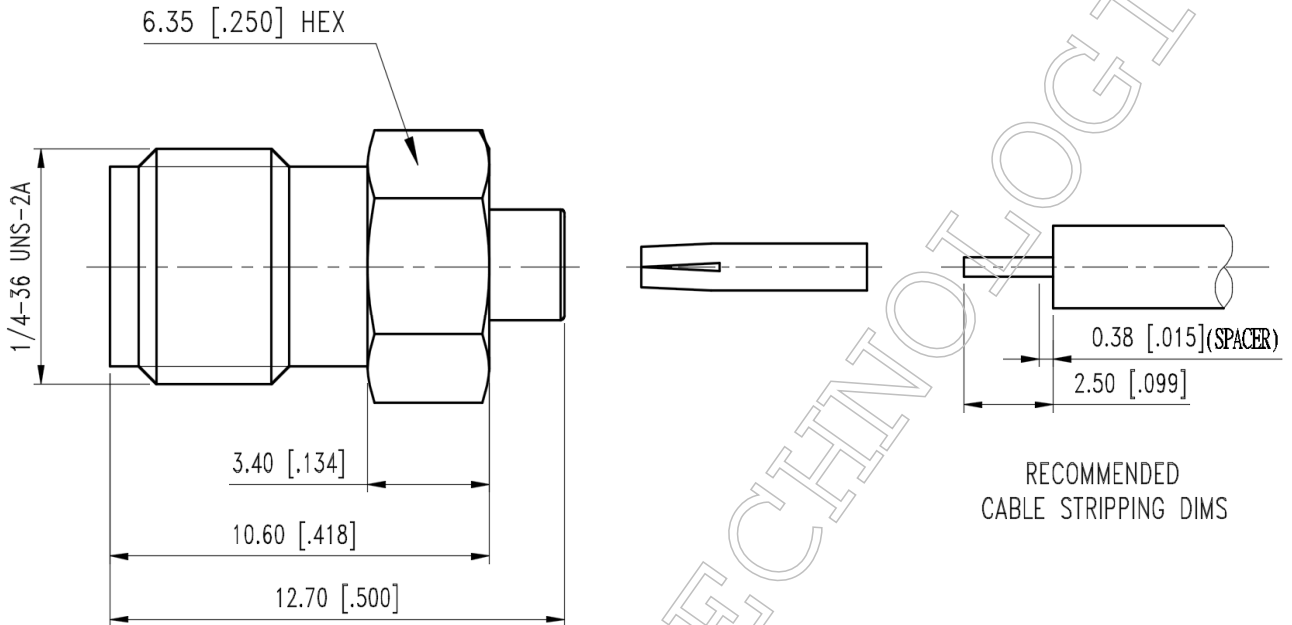

▪ **Material Specification**

Description	Material	Plating
Body	Brass	Gold
Pin	BeCu	Gold
Dielectric	PTFE	

In the effort to improve our products, we reserve the right to make changes judged to be necessary

Electrical Specification

Description			Description		
Impedance	50	Ω	Insulation Resistance	5000	M Ω Min.
Frequency	18	GHz	Inner Contact Resistance	6	m Ω Max.
VSWR	1.25	Max.	Outer Contact Resistance	2	m Ω Max.
Insertion Loss	0.25	dB Max.	Voltage Rating	335	Vrms Max.
Dielectric Withstanding Voltage	750	Vrms Max.			

Mechanical Specification

Description			Description		
Center Contact			Recommended Torque	7~9	in. lbs
Axial Force-Mating End	N/A	lbs.	Coupling Nut Retention	N/A	lbs. Min.
Axial Force-Opposite End	N/A	lbs.			
Connector Durability	500	cycles			
Weight	1.6	g			

Environmental Specification

Description		
Temperature Min.	-65	$^{\circ}$ C
Temperature Max.	165	$^{\circ}$ C
Hermetic Seal	N/A	

In the effort to improve our products, we reserve the right to make changes judged to be necessary