


Outline Drawing (Size: mm)

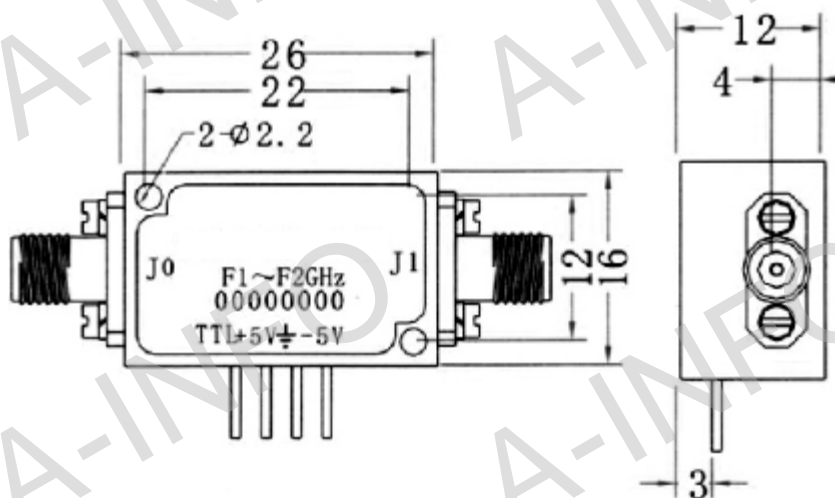

Technical Specification

Item	Technical Specification
Frequency(GHz)	8-12
Insertion Loss(dB)	2.5 max
VSWR	1.5 max
Isolation(dB)	60 min
Switching Speed(ns)	50 max
Power Handling(W)	0.2
Power Supply(V)	±5
Connectors	SMA- Female
Operating Temperature(°C)	-55 ~ +85
Storage Temperature(°C)	-65 ~ +125

Test Results Table

Item	Test Results
Frequency(GHz)	8-12
Insertion Loss(dB)	1.99 max
VSWR	1.34 max
Isolation(dB)	65 min
Switching Speed(ns)	50 max
Power Handling(W)	0.2
Power Supply(V)	±5
Connectors	SMA- Female
Operating Temperature(°C)	-55 ~ +85
Storage Temperature(°C)	-65 ~ +125