






Standards
NF C 96-315
MIL-DTL-3933

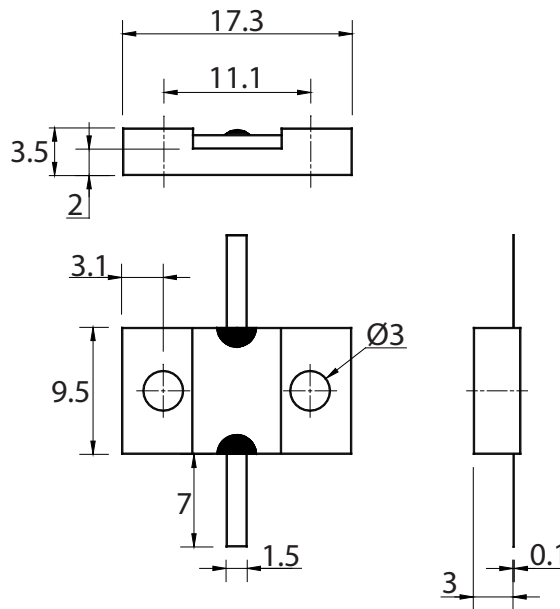

Substrate	AlN
Resistive film	Thick film
Tab	Ag
Protection film	Epoxy
Mounting flange/Plating	Cu/Ni
Tab attachment	Brazed with epoxy encapsulation

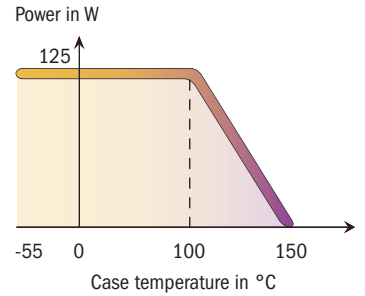

Dimensions in mm

mm	inch
0.1	0.004
1.5	0.059
2	0.079
3	0.118
3.1	0.122
3.5	0.138
7	0.276
9.5	0.374
11.1	0.437
17.3	0.681

P/N	Attenuation* (dB)	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR	Accuracy $\pm\Delta\alpha$ (dB)
16-6797	1	2.5	125	50	1.30	0.75**

* Others values on request
** DC-520MHz $\pm\Delta\alpha= 0.2\text{db}$

