


Outline Drawing (Size: mm)

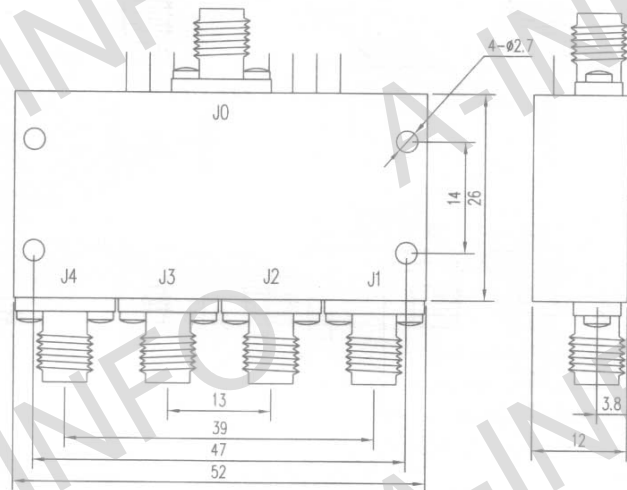

Technical Specification

Item	Technical Specification
Frequency Range(GHz)	24
Insertion Loss(dB)	4.6 max
Isolation(dB)	60 min
Switching Speed(ns)	100 max
Input Power(W)	0.2 CW
Operating Temperature(°C)	-40 ~ +70
Connector	SMA-Female
Net Weight(Kg)	0.02 Around

Test Results

Frequency (GHz)	Port	Insertion Loss(dB)	VSWR		Isolation(dB)
		max	S11	S22	
24	J0→J1	5.24	1.19	1.50	68
	J0→J2	3.73	1.76	1.70	68
	J0→J3	3.76	1.68	1.64	59
	J0→J4	5.25	1.36	1.34	68