


Outline Drawing (Size: mm)

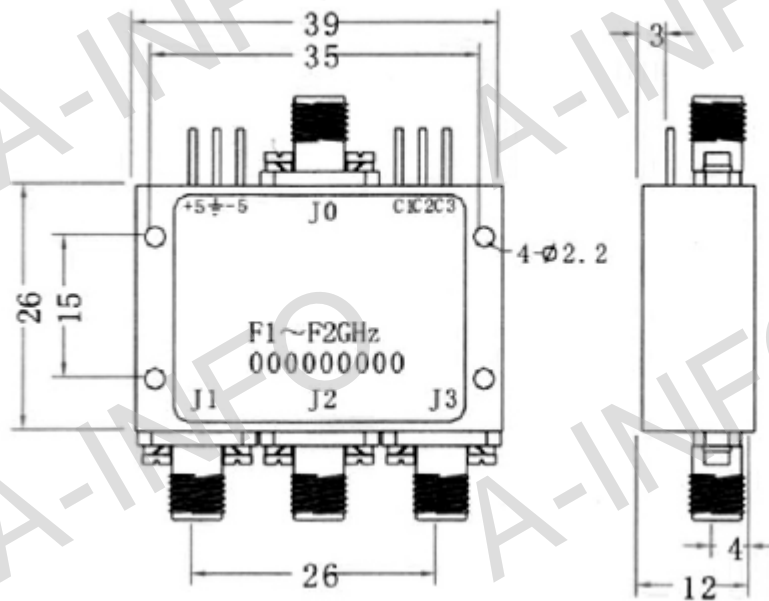

Technical Specification

Item	Technical Specification
Frequency Range(GHz)	2-18
Insertion Loss(dB)	2.7 max
Isolation(dB)	60 min
VSWR	2.2 max
Switching Speed(ns)	50 max
Power Handling(W)	0.2 max
Connector	SMA-Female
Operating Temperature(°C)	-55 ~ +85
Storage Temperature(°C)	-65 ~ +125
Net Weight(Kg)	0.03 Around

Test Results

Port	Insertion Loss(dB)	VSWR	Isolation(dB)
J0-J1	2.54	1.95	60.7
J0-J2	2.48	1.83	61.3
J0-J3	1.50	1.87	62.0