


## Outline Drawing (Size: mm)

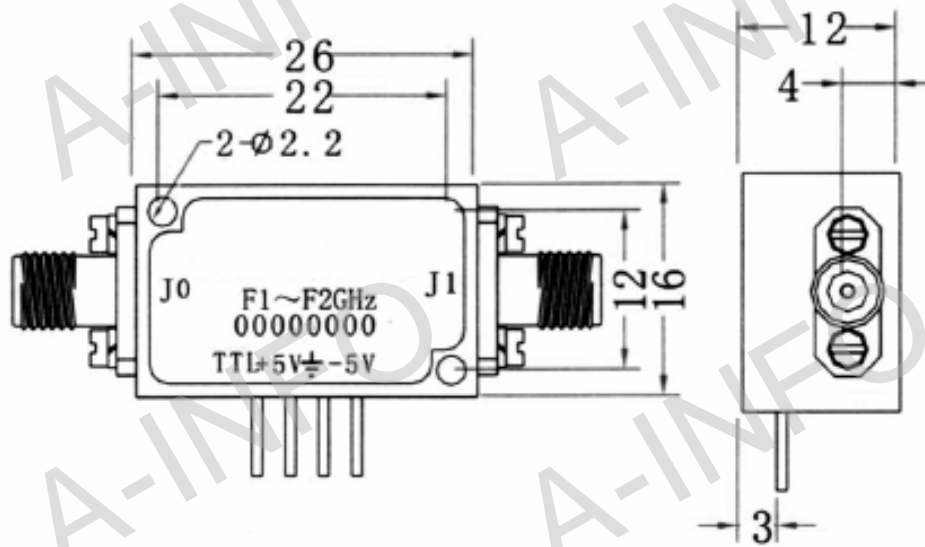


## Technical Specification

Item	Technical Specification
Frequency Range(GHz)	2-18
Insertion Loss(dB)	3.1 max
Isolation(dB)	60 min
VSWR	2.2 max
Switching Speed(ns)	50 max
Power Handling(W)	0.2 max, 1 Peak
Connector	SMA-Female
Operating Temperature(°C)	-55 ~ +85
Storage Temperature(°C)	-65 ~ +125
Net Weight(Kg)	0.02 Around

## Test Results

### Insertion Loss and VSWR

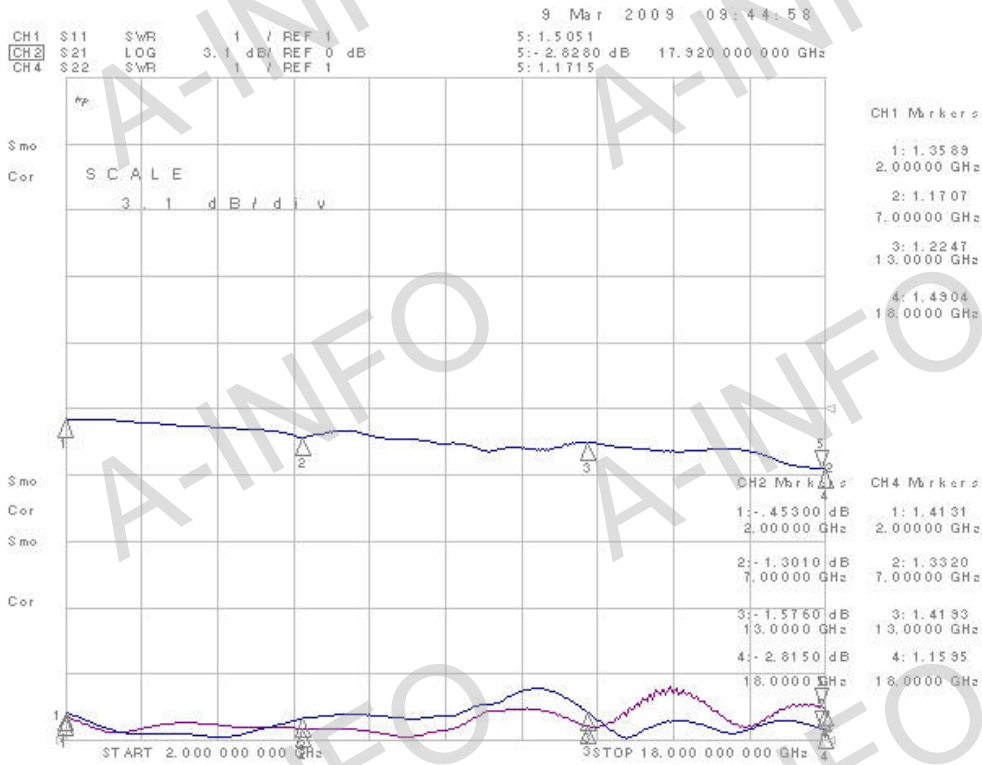

### Isolation

