






Standards
NF C 96-315
MIL-DTL-3933

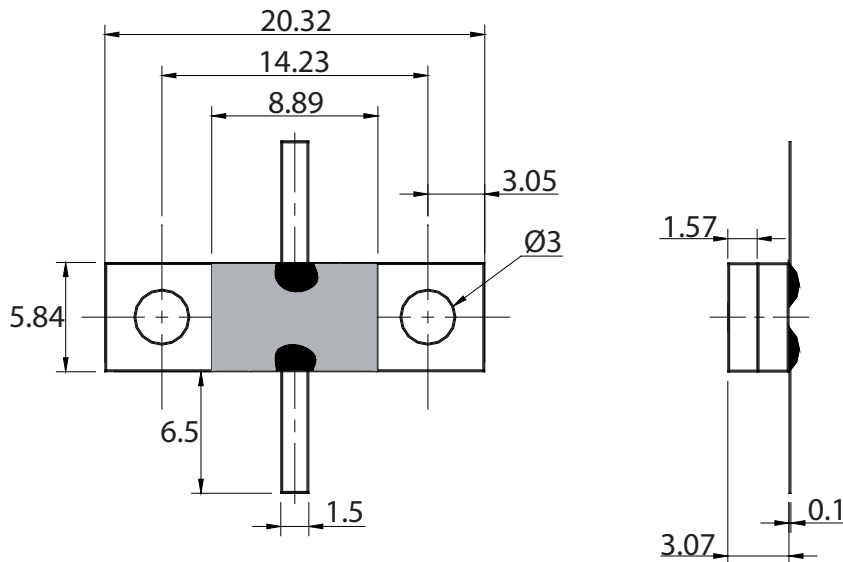

Substrate	AlN
Resistive film	Thick film
Tab	Ag
Protection film	Epoxy
Mounting flange/Plating	Cu/Ni
Tab attachment	Brazed with epoxy encapsulation

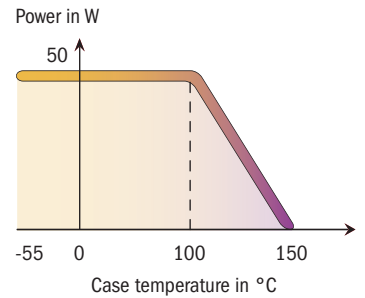

Dimensions in mm

P/N	Attenuation* (dB)	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR	Accuracy $\pm \Delta\alpha$ (dB)
16-6791	1	3	50	50	1.25	0.3
16-6792	3	3	50	50	1.25	0.3
16-6793	6	3	50	50	1.25	0.5
16-6794	10	3	50	50	1.25	0.5
16-6795	20	3	50	50	1.25	1
16-6796	30	3	50	50	1.25	1.5

mm	inch
0.1	0.004
1.5	0.059
1.57	0.062
3	0.118
3.05	0.120
3.07	0.121
5.84	0.230
6.5	0.256
8.89	0.350
14.23	0.560
20.32	0.800

* Others values on request