

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$	1000A
V_{DRM}/V_{RRM}	400~1000V
I_{TSM}	9.0 kA
I^2t	405 $10^3 A^2S$



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	125			1000	A
						690	
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{DRM} \& V_{RRM}$ tp=10ms $V_{DSM} \& V_{RSM} = V_{DRM} \& V_{RRM} + 100V$	125	400		1000	V
I_{DRM} I_{RRM}	Repetitive peak current	$V_{DM} = V_{DRM}$ $V_{RM} = V_{RRM}$	125			30	mA
I_{TSM}	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$	125			9.0	kA
I^2t	I^2T for fusing coordination					405	$A^2s * 10^3$
V_{TO}	Threshold voltage		125			0.70	V
r_T	On-state slop resistance					0.35	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=1550A$, F=7kN	125			1.24	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 1300A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125			100	A/μs
Q_{rr}	Recovery charge	$I_{TM}=1000A$, tp=2000μs, $di/dt=-20A/\mu s$, $V_R=50V$	125		1030		μC
I_{GT}	Gate trigger current	$V_A=12V$, $I_A=1A$	25	35		250	mA
V_{GT}	Gate trigger voltage			0.8		2.5	V
I_H	Holding current			20		200	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 7kN				0.045	°C /W
$R_{th(c-h)}$	Thermal resistance case to heat sink					0.010	
F_m	Mounting force			5.3		10	kN
T_{stg}	Stored temperature			-40		140	°C
W_t	Weight				80		g
Outline		KT25aT					

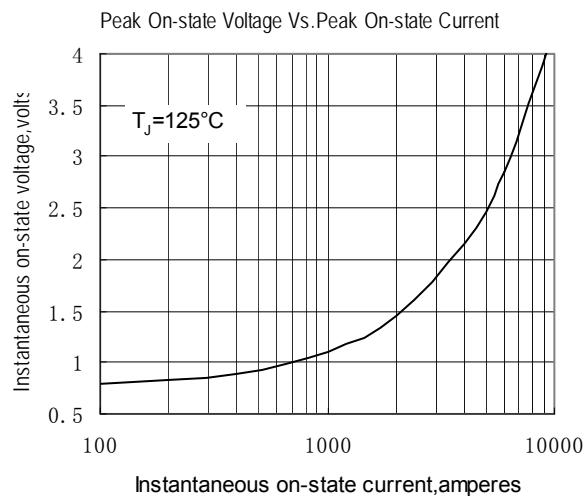


Fig.1

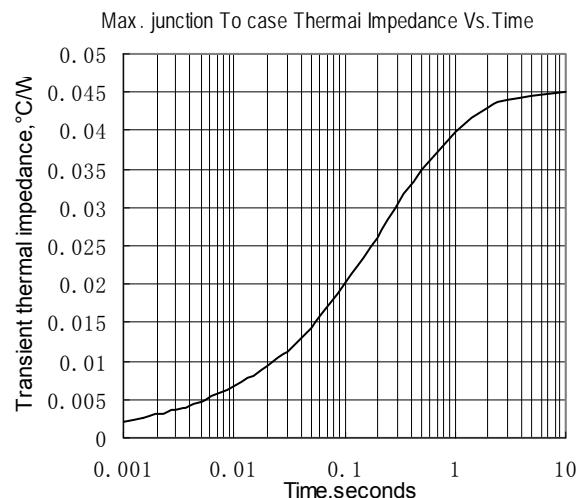


Fig.2

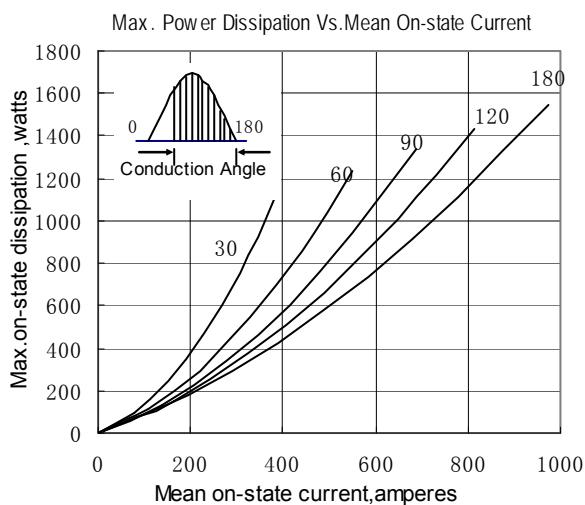


Fig.3

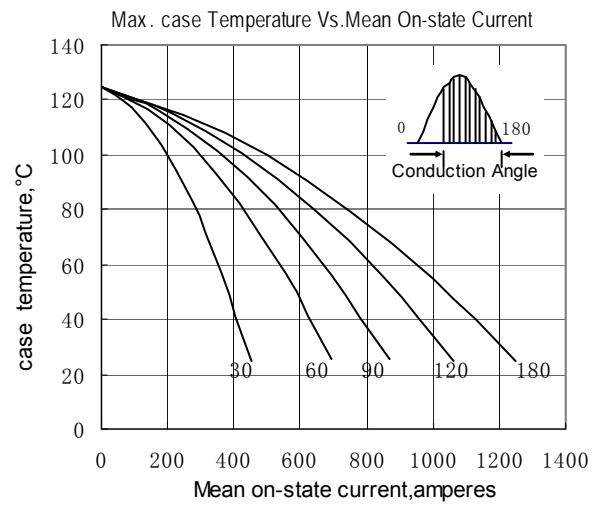


Fig.4

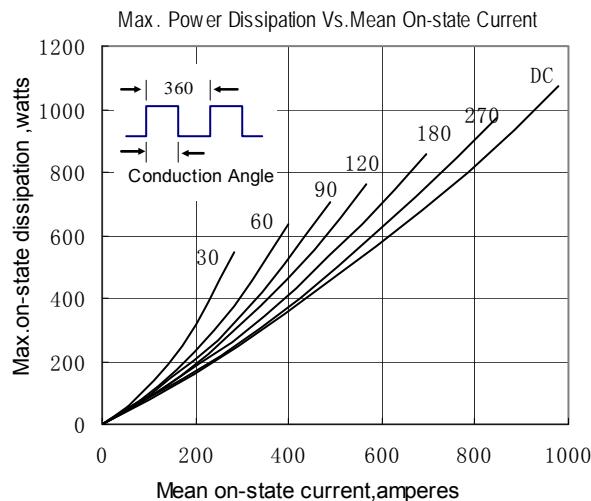


Fig.5

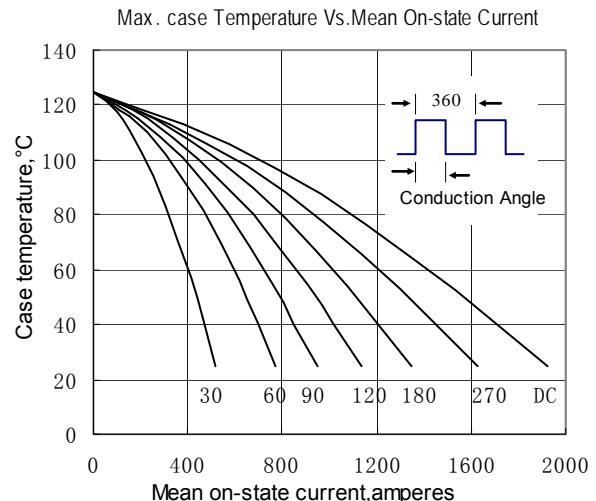


Fig.6

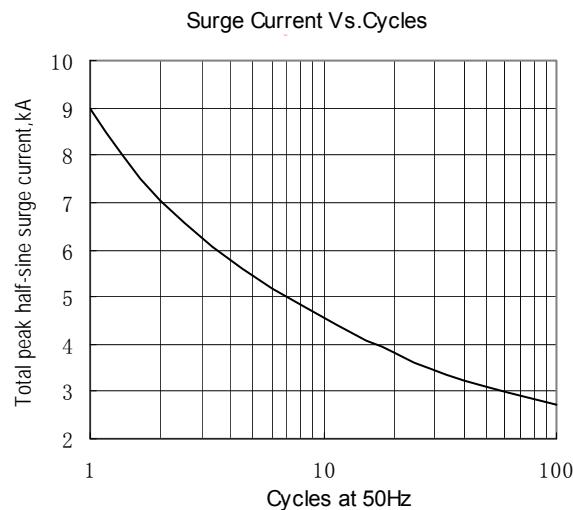


Fig.7

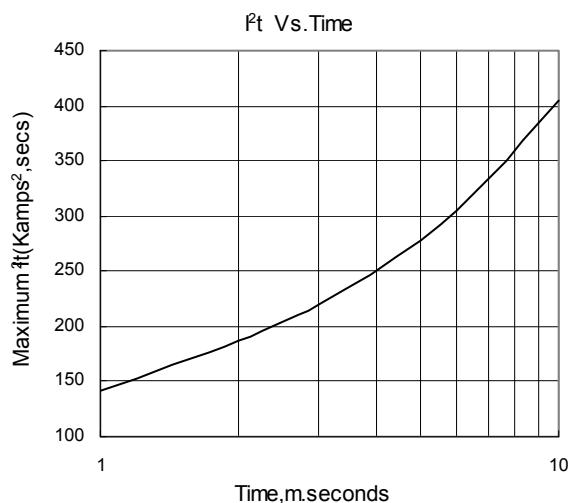


Fig.8

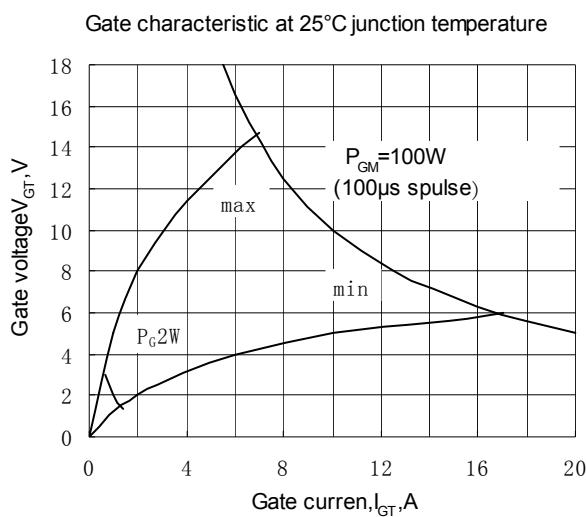


Fig.9

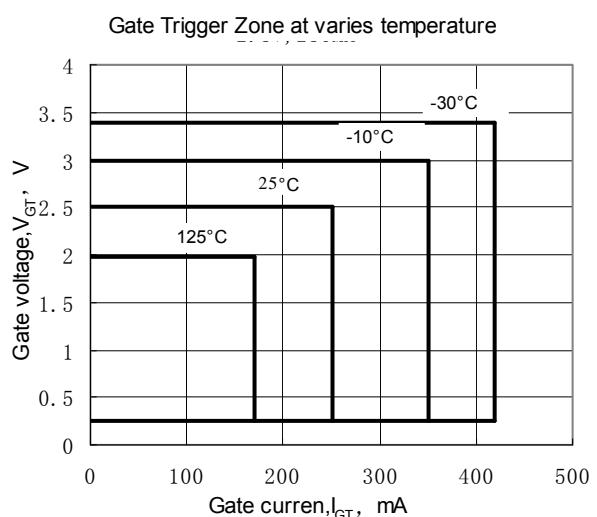


Fig.10

Outline:

