

15WMT_Cu WR15 Waveguide Magic Tee 50-75GHz with Four Rectangular Waveguide Interfaces

WR15 Waveguide Magic Tee Operating From 50 to 75GHz with Four Rectangular Waveguide Interfaces

Product Information

SKU	15WMT_Cu
-----	----------

Description

Waveguide magic tee 15WMT_Cu, operating from 50 to 75GHz with a 0.6dB insertion loss, 40dB isolation, H-Plane VSWR 1.40:1 and E-Plane VSWR 1.60:1. 15WMT_Cu is a four-ports hybrid coupler or power divider. All the ports have standard WR15 waveguides with the same flanges FUGP620(UG-385/U). The magic tee can be used as a power combiner or a power divider based on the given application's needs.


Technical Specification

Electrical Specification		Interface	
WG Tee Type	Magic Tee	Flange 3 Style	Round
Waveguide Band	V	Flange 3 Type	Cover
Waveguide Type	Rectangular	Flange 3 Designation	FUGP620(UG-385/U)
Waveguide Size EIA WR	WR15	Flange 4 Style	Round
Frequency, Min (GHz)	50	Flange 4 Type	Cover
Frequency, Max (GHz)	75	Flange 4 Designation	FUGP620(UG-385/U)
I.L., Max (dB)	0.6	Mechanical Specification	
VSWR, H-Plane, Typ	1.4	Body Material	Cu
VSWR, H-Plane, Typ	1.40:1	Size, L (mm)	25.4
VSWR, E-Plane, Typ	1.6	Size, W (mm)	25.4
VSWR, E-Plane, Typ	1.60:1	Size, H (mm)	20.3
Isolation, Min (dB)	30	Weight, (kg)	0.1
Isolation, Typ (dB)	40	Pressure Sealed	No
Power Handling, CW, (W)	11	Environmental Specification	
Power Handling, Peak, (KW)	7	Operating Temp. Low (°C)	-55
Interface		Operating Temp. High (°C)	85
Flange 1 Style	Round	Storage Temp. Low (°C)	-60
Flange 1 Type	Cover	Storage Temp. High (°C)	90
Flange 1 Designation	FUGP620(UG-385/U)		
Flange 2 Style	Round		
Flange 2 Type	Cover		
Flange 2 Designation	FUGP620(UG-385/U)		


Additional Information

Application	General Purpose Indoor & Outdoor, Fixed
-------------	-----------------------------------------

Outline Drawing(Size: mm)


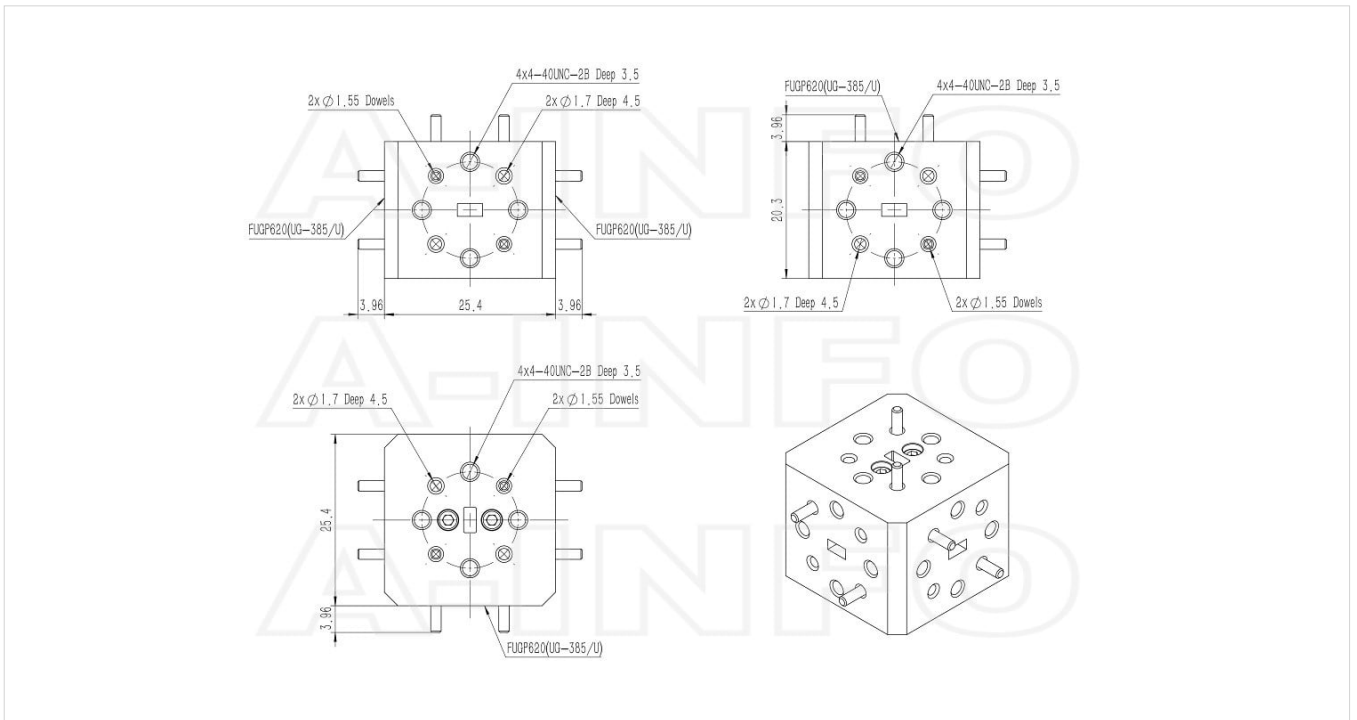


Flange Drawing(Size: mm)

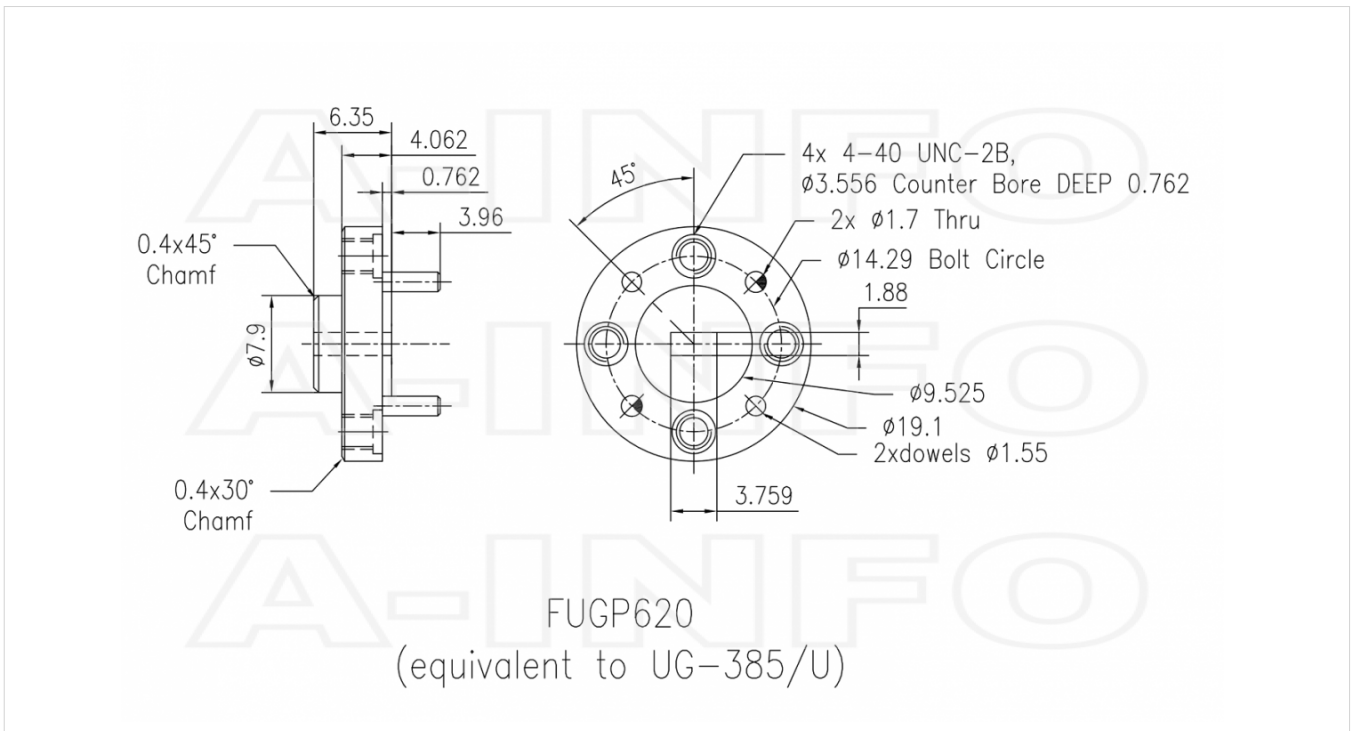


Typical Test Results


Insertion Loss(Including the theoretical loss 3.0dB)

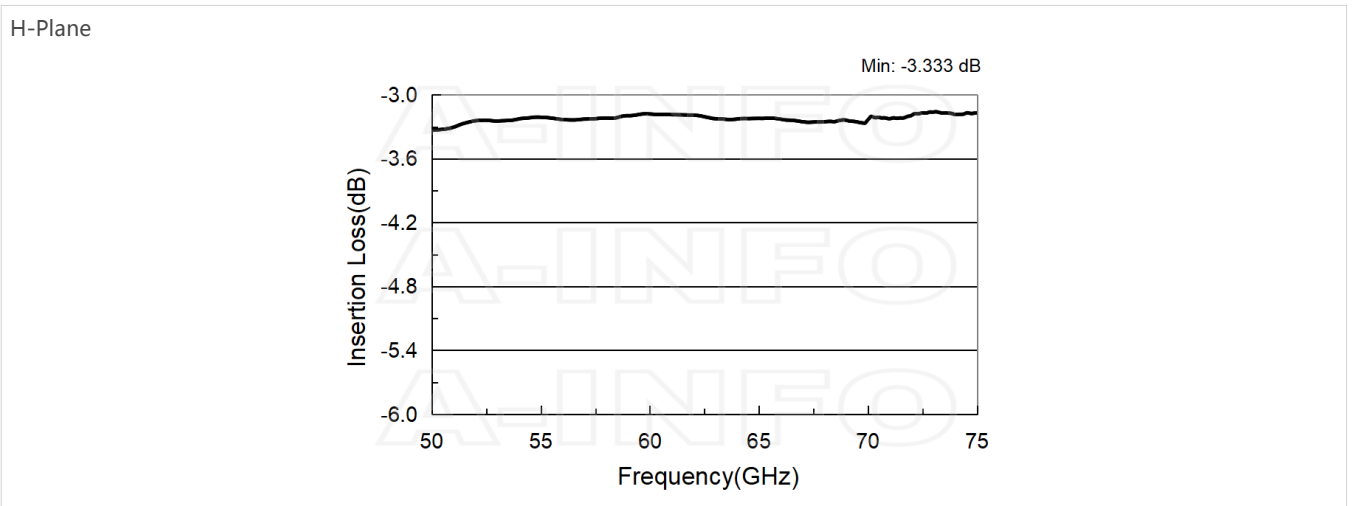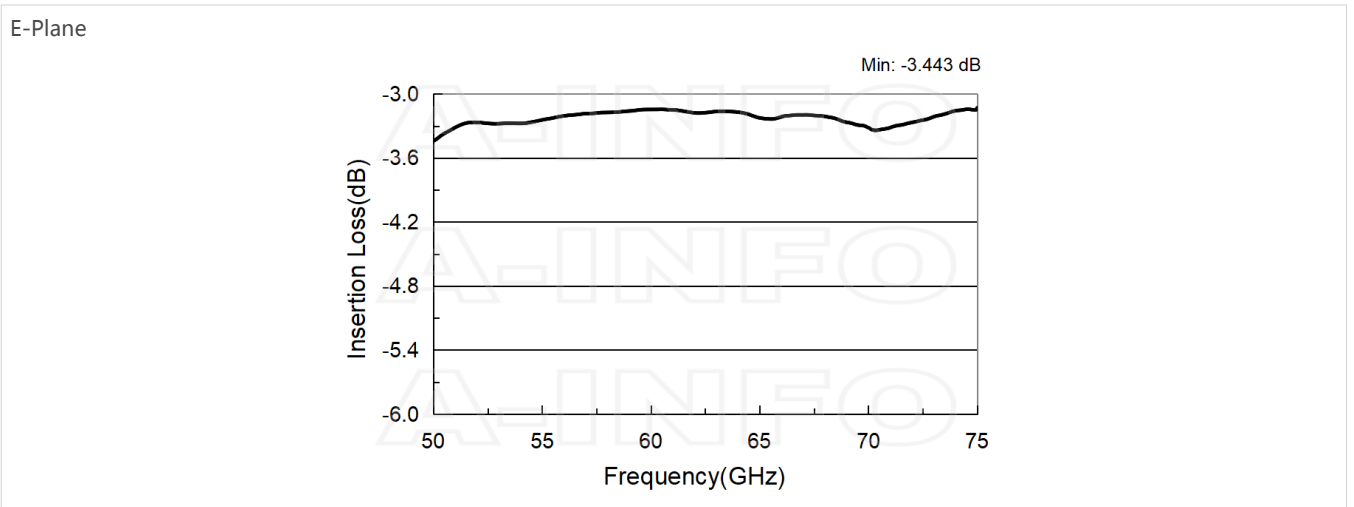

VSWR

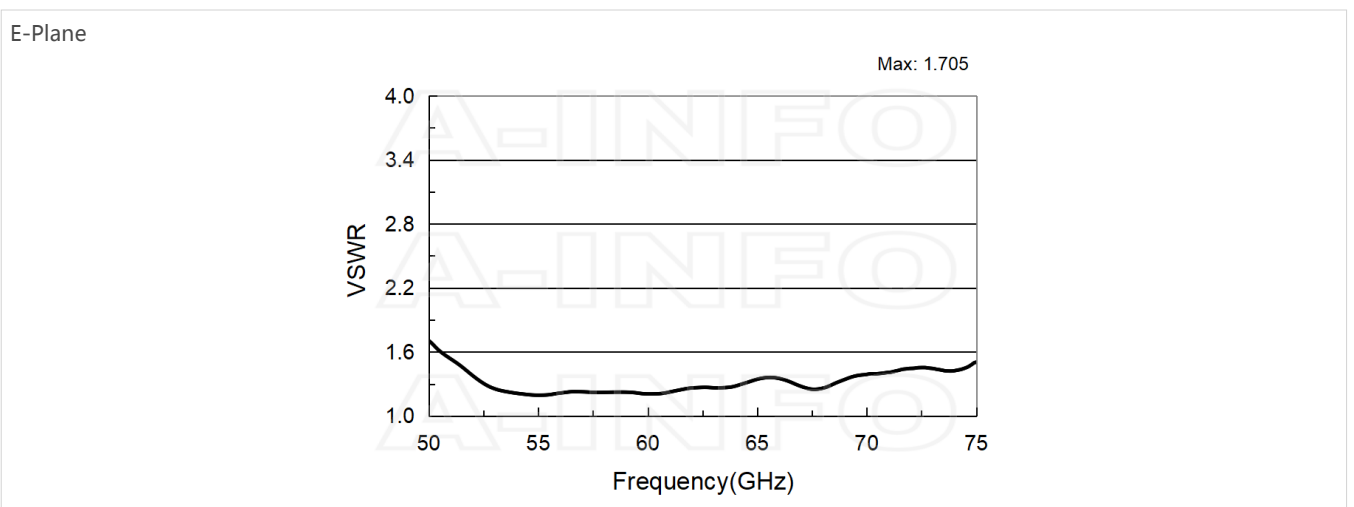


H-Plane

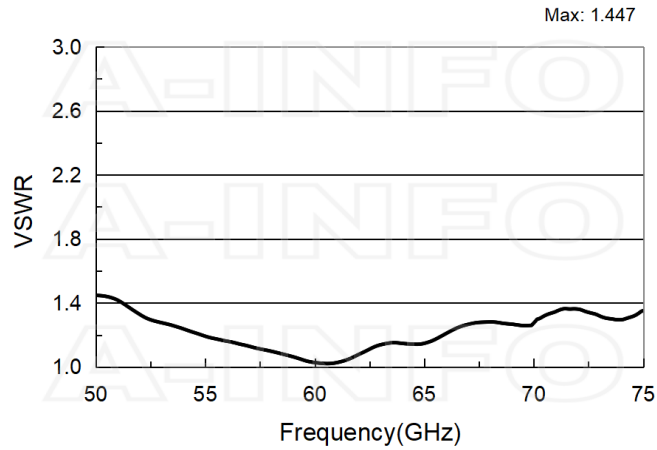


Unbalance


E-Plane

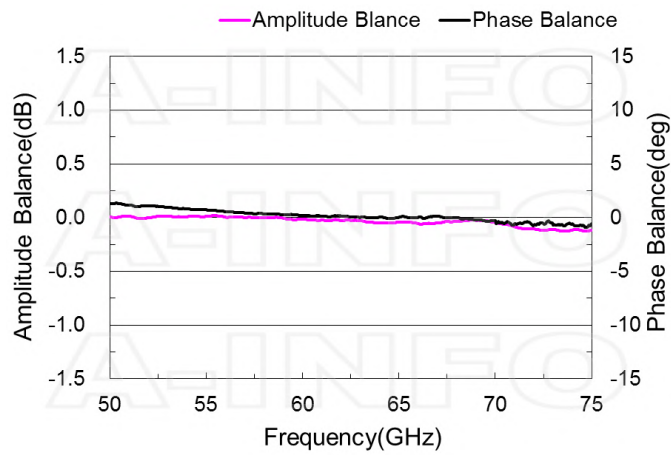

H-Plane

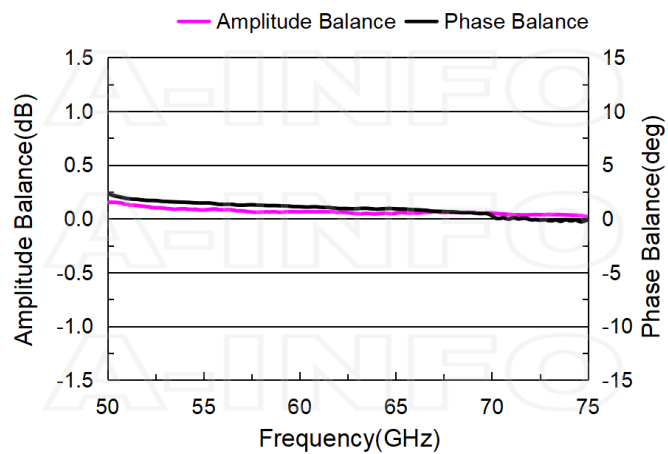

Isolation

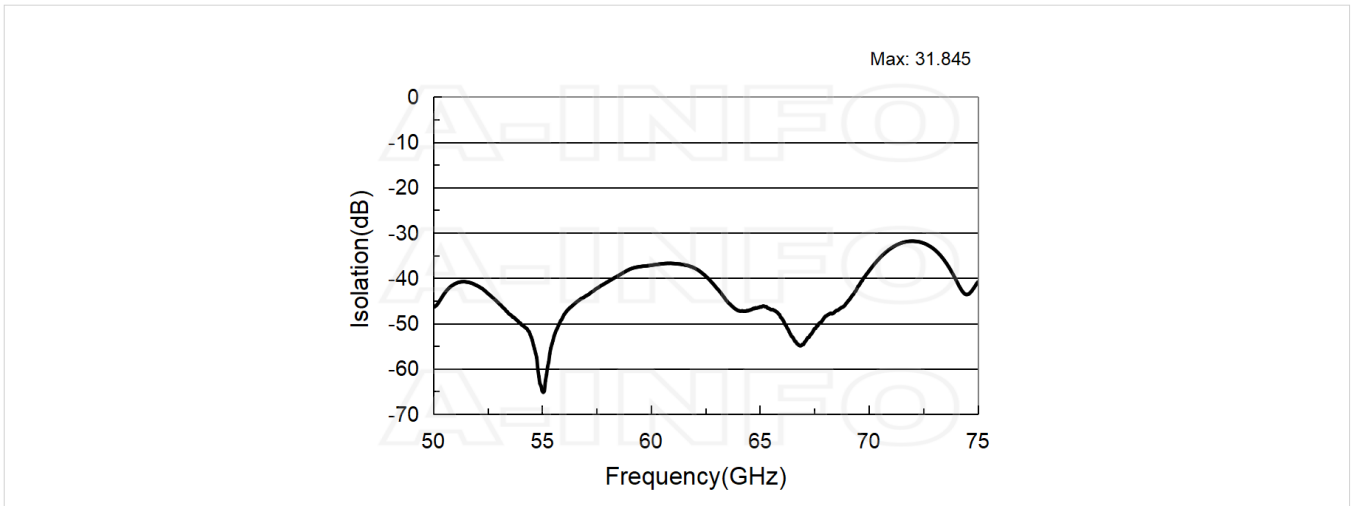

Similar Products



15WET_Cu WR15 Waveguide E-Plane Tee 50-75GHz with Three Rectangular Waveguide Interfaces



19WMT_Cu WR19 Waveguide Magic Tee 40-60GHz with Four Rectangular Waveguide Interfaces



19WET_Cu WR19 Waveguide E-Plane Tee 40-60GHz with Three Rectangular Waveguide Interfaces



12WMT_Cu WR12 Waveguide Magic Tee 60-90GHz with Four Rectangular Waveguide Interfaces



12WET_Cu WR12 Waveguide E-Plane Tee 60-90GHz with Three Rectangular Waveguide Interfaces

About this Datasheet

<ul style="list-style-type: none">● Product Information <p>Product Link: https://www.ainfoinc.com/15wmt-cu-wr15-waveguide-magic-tee-50-75-ghz-fugp620-ug-385-u Data subject to change without notice. © A-INFO INC. 2024. All Rights Reserved</p>	<ul style="list-style-type: none">● Contact Us <p>Address: 60 Tesla, Irvine, CA 92618, USA</p> <p>Website: www.ainfoinc.com</p> <p>Email: sales@ainfoinc.com</p>	<ul style="list-style-type: none">● Phone & Fax <p>Phone: +1-949-639-9688 +1-949-639-9608</p> <p>Fax: +1-949-639-9670</p>
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------