

产品宣传手册

PRODUCT BROCHURES



*Thanks for your kind attention, welcome contact us!
We wish you successful business and happy life!*



关于 About UIY 优译

UIY Inc. was established in 2003 in Shenzhen, China, with the registered capital of 200 million yuan (about 32 million dollars). It is a comprehensive enterprise of R&D, production marketing and service for the civilian and military microwave communications device. Located in Shenzhen, which is known as the “City of Innovation”, “Design Capital” and “Fashion Capital”. The company's product frequency range of DC-112GHz, and power up to 20KW. which is widely used in military, aerospace, remote sensing and control, civil communications and other fields. With excellent professional technology, it has won good reputation and public praise in the microwave communication industry at domestic and abroad.

In this fast-changing time, in order to steadily advance in the constantly evolving and increasingly mature market, we keep excellent quality and service to win more market chances. Our company has passed the ISO9001:2015 quality management system certification and GJB 9001C-2017 weapons and equipment quality management system certification. At the same time, we also won the title of “Guangdong Province enterprise of observing contract and valuing credit” in 2019.

UIY has always been adhering to the ‘Customer Oriented, Technology Leading, Integrity First, Bold Innovation’ management philosophies, and believe in the ‘Technical advantage is the foundation, market demand is the guidance’.

Since its establishment, UIY has been keeping in-depth cooperation and communication with renowned enterprises, institutions, scientific research institutions all over the world, laid the technical foundation for product development and research.

We are grateful to the old and new friends who have always cared and supported the development of UIY. We sincerely welcome friends from all over the world to join us for progress, feel the spirit of technological innovation and create a bright future together.

优译成立于2003年，注册资金2亿元人民币，是一家集军民微波通信器件研发、生产、销售和技术服务于一体的综合性企业，坐落于富有“创新之都”、“设计之都”、“时尚之都”之称的深圳！公司生产产品频率范围：DC-112GHz，功率可高达20KW，广泛应用于军事、航天航空、遥感测控、民用通信等领域。凭借过硬的专业技术在国内外微波通信行业中赢得了良好的口碑和信誉。

在这个瞬息万变的时代，优译为了在不断发展和日益成熟的市场中稳步迈进、用卓越的品质和服务赢得市场的认可，公司通过了ISO9001:2015质量管理体系认证和GJB 9001C-2017武器装备质量管理体系认证，并在2019年获得了“广东省‘守合同重信用’企业”的称号！

优译始终秉承“诚信为先、顾客至上、科技引领、敢于创新”的经营理念，坚持“以技术优势为根本，以市场需求为导向”，不断地与国内外知名企业、大学院校、科研机构等进行相互交流、研究并长期深度合作，为公司的产品研发奠定了扎实的技术基础，也为相互的合作共赢提供了技术支持。

我们感恩一直以来关心和支持优译发展的新老朋友，我们也诚挚的欢迎来自世界各地的朋友和我们一起协同奋进，感受优译科技创新的力量，创建属于我们的美好未来！

目录

CONTENTS

◎ RF Isolator 射频隔离器	01
Coaxial Isolator 同轴隔离器	01
Drop in Isolator 带线（嵌入式）隔离器	02
Broadband Isolator 宽带隔离器	03
Dual Junction Isolator 双节隔离器	06
Surface Mount Isolator 表面封装隔离器	07
Microstrip Isolator 微带隔离器	08
Waveguide Isolator 波导隔离器	09
◎ RF Circulator 射频环行器	10
Coaxial Circulator 同轴环行器	10
Drop in Circulator 带线（嵌入式）环行器	11
Broadband Circulator 宽带环行器	12
Dual Junction Circulator 双节环行器	15
Microstrip Circulator 微带环行器	17
Surface Mount Circulator 表面封装环行器	18
Waveguide Circulator 波导环行器	18
◎ RF Filter 射频滤波器	19
Band Pass Filter 带通滤波器	19
Low Pass Filter 低通滤波器	26
High Pass Filter 高通滤波器	27
Band Stop Filter 带阻滤波器	28
◎ Termination/Attenuator 负载/衰减器	29
Coaxial Termination 同轴终端(负载)	29
Coaxial Attenuator 同轴衰减器	31
◎ Power Divider/Splitter 功分器	33
2 Way Power Divider 2路功分器	33
3 Way Power Divider 3路功分器	34
4 Way Power Divider 4路功分器	34
8 Way Power Divider 8路功分器	35
16 Way Power Divider 16路功分器	35
◎ Duplexer/Triplexer 双工器/三工器	36
Duplexer 双工器	36
Triplexer 三工器	39
◎ TX RX Combiner/Splitter 合路/分路系统	40
Tx & Rx Multicoupler 多路耦合系统	40
RX Splitter 分路器	41
Tx Combiner 合路器	41
◎ Other Products 其他组件	43
Hybrid Combiner 电桥/同频合路器	43
Directional Coupler 定向耦合器	44
Waveguide to Coaxial Adapter 波导同轴转换	45

HONORARY CERTIFICATE 荣誉资质



Coaxial Isolator 同轴隔离器



- Can be dual junction even three for high isolation.
- Military, space and commercial applications.
- Custom design available upon request.
- Guaranteed for one year standard.

Low frequency from 10MHz to 1875MHz, FM, VHF, UHF, etc

Model No. 型号	Freq. Range (MHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYCI8080A	10~55	20%	1.2	20	1.25	50	50	N, SMA	+10~+60	80 × 80 × 28
UIYCI6060A	45~270	40%	0.5	25	1.15	200	50	N, SMA	-30~+70	60 × 60 × 28
UIYCI6075A	45~270	40%	0.5	25	1.15	200	100	N, SMA	-30~+70	60 × 75 × 28
UIYCI80140B	60~200	20%	0.3	23	1.2	500	250	N	0~+70	80 × 140 × 18
UIYCI100166A	70~130	20%	0.5	20	1.25	500	250	N	0~+70	100 × 166 × 40
UIYCI5656A	130~900	40%	0.3	23	1.2	300	30	N, SMA	-30~+70	56 × 56 × 15
UIYCI5663A	130~900	40%	0.3	23	1.2	300	100	N, SMA	-30~+70	56 × 63.5 × 15
UIYCI3538A	200~1875	40%	0.2	35	1.15	300	30	N, SMA	-40~+85	35 × 38 × 15
UIYCI3556A	200~1875	40%	0.2	35	1.15	300	100	N, SMA	-40~+85	35 × 56 × 15
UIYBCI6060F	225~400	Full	0.8	18	1.3	160	50	N, SMA	0~+60	60 × 60 × 28
			1.0	16	1.4				-40~+85	
UIYBCI6075F	225~400	Full	0.8	18	1.3	160	100	N, SMA	0~+60	60 × 75 × 28
			1.0	16	1.4				-40~+85	
UIYCI4550A	250~1500	30%	0.3	23	1.15	300	30	N, SMA	-30~+70	45 × 50 × 24
UIYCI4580A	250~1500	30%	0.3	23	1.15	300	250	N, SMA	-30~+70	45 × 80 × 24
UIYBCI6060H	300~475	Full	0.8	18	1.3	100	50	N, SMA	25 ± 5	60 × 60 × 28
			1.0	17	1.35				-40~+85	
UIYCI5356A	300~1500	18%	0.3	23	1.2	500	30	N	-40~+85	53 × 56 × 20

700MHz to 40GHz, GSM, CDMA, WCDMA, LTE, L.S.C.X band, etc

Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYCI3434A	0.7~2.0	40%	0.3	23	1.15	200	30	N, SMA	-40~+85	34 × 34 × 22
UIYCI3232A	0.7~2.5	35%	0.3	23	1.15	200	30	N, SMA	-40~+85	32 × 32 × 18
UIYCI2528A	0.7~5.0	30%	0.3	23	1.15	200	30	N, SMA	-40~+85	25.4 × 28.5 × 15
UIYCI2538A	0.7~5.0	30%	0.3	23	1.15	200	100	N, SMA	-40~+85	25.4 × 38.5 × 15
UIYCI1522A	4.0~7.2	25%	0.3	23	1.2	60	10	N, SMA	-40~+85	15 × 22.5 × 13.8
UIYCI2536A	4.0~8.0	20%	0.3	23	1.2	300	100	N	-20~+70	25 × 36 × 18
UIYCI1318A	6.0~27.5	75%	0.3	23	1.2	60	10	SMA	-55~+85	13 × 18 × 13.8
								2.92mm		
UIYBCI1025A	18.0~26.5	Full	0.7	20	1.3	10	2	2.92mm	-55~+85	10.2 × 25.6 × 12.5
	23.0~28.0	Full	0.9	20	1.3	10	2	2.92mm	-55~+85	10.2 × 25.6 × 12.5
UIYBCI1326A	26.5~40.0	Full	1.2	15	1.5	10	2	2.92mm	-55~+85	13 × 26 × 16.6

Drop in Isolator 带线（嵌入式）隔离器

- Frequency range 10MHz to 40GHz, up to 2000W power.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Guaranteed for one year standard.



Low frequency from 10MHz to 3600MHz, FM, VHF, UHF, etc

Model No. 型号	Freq. Range (MHz) 频率范围	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDI8080A	10~55	20%	1.2	20	1.25	50	50	TAB	+10~+60	80 × 80 × 28
UIYDI6060A	45~270	40%	0.5	25	1.15	200	50	TAB	-20~+65	60 × 60 × 28
UIYDI6075A	45~270	40%	0.5	25	1.15	200	100	TAB	-20~+65	60 × 75 × 28
UIYDI80140B	60~200	20%	0.3	23	1.2	500	250	TAB	0~+70	80 × 140 × 18
UIYDI100166A	70~130	20%	0.5	20	1.25	500	250	TAB	0~+70	100 × 166 × 40
UIYDI5656A	130~900	40%	0.3	23	1.2	300	30	TAB	-30~+70	56 × 56 × 15
UIYDI5663A	130~900	40%	0.4	23	1.2	300	100	TAB	-30~+70	56 × 63.5 × 15
UIYDI3538A	200~1875	40%	0.2	30	1.15	300	30	TAB	-40~+85	35 × 38 × 11
UIYDI3546A	200~1875	40%	0.2	30	1.15	300	100	TAB	-40~+85	35 × 46 × 11
UIYDI2525A	200~3600	30%	0.2	25	1.15	200	30	TAB	-40~+85	25.4 × 25.4 × 10.5
UIYDI2531A	200~3600	30%	0.2	25	1.15	200	100	TAB	-40~+85	25.4 × 31.7 × 10.5
UIYBDI6060F	225~400	Full	0.8	18	1.3	160	50	TAB	0~60	60 × 60 × 28
			1.0	16	1.4				-40~+85	
UIYBDI6075F	225~400	Full	0.8	18	1.3	160	100	TAB	0~60	60 × 75 × 28
			1.0	16	1.4				-40~+85	
UIYDI4242A	250~1300	35%	0.25	25	1.15	300	30	TAB	-30~+70	42 × 42 × 13
UIYDI4249A	250~1300	35%	0.25	25	1.15	300	100	TAB	-30~+70	42 × 49 × 13
UIYBDI6060H	300~475	Full	0.8	18	1.3	100	50	TAB	25 ± 5	60 × 60 × 28
			1.0	17	1.35				-40~+85	
UIYDI5356A	300~1500	18%	0.3	23	1.2	500	30	TAB	-40~+85	53 × 56 × 20

450MHz to 40GHz, GSM,CDMA,WCDMA,LTE,L.S.C.X band, etc

Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDI2020A	0.4~3.0	30%	0.25	25	1.15	100	30	TAB	-40~+85	20 × 20 × 10.6
UIYDI2027A	0.4~3.0	30%	0.25	25	1.15	100	100	TAB	-40~+85	20 × 27 × 10.6
UIYDI1919A	0.6~5.0	30%	0.25	25	1.15	100	30	TAB	-40~+85	19 × 19 × 8.6
UIYDI1925A	0.6~5.0	30%	0.25	25	1.15	100	100	TAB	-40~+85	19 × 25.4 × 8.6
UIYDI3232A	0.7~3.1	30%	0.3	23	1.15	200	30	TAB	-40~+85	32 × 32 × 11
UIYDI1212B	0.7~10.0	30%	0.3	23	1.2	60	20	TAB	-40~+85	12.7 × 12.7 × 8
UIYDI1220A	4.0~8.0	25%	0.25	23	1.2	60	5	TAB	-40~+85	12 × 20 × 8
UIYDI815A	5.0~25.0	40%	0.3	23	1.2	65	5	TAB	-55~+85	8.9 × 15 × 7.8
UIYDI1318A	17.0~27.5	20%	0.5	20	1.25	30	5	TAB	-40~+85	13 × 18 × 13.8
UIYBDI1025A	18.0~26.5	Full	0.7	20	1.3	10	2	TAB	-55~+85	10.2 × 25.6 × 12.5
	23.0~28.0	Full	0.9	20	1.3	10	2	TAB	-55~+85	10.2 × 25.6 × 12.5
UIYBDI1326A	26.5~40.0	Full	1.2	15	1.5	10	2	TAB	-55~+85	13 × 26 × 16.6

Broadband Isolator 宽带隔离器



- Frequency range 56MHz to 40GHz, up to 2000W power.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Guaranteed for one year standard.

Coaxial type from 56MHz to 40GHz

Model No. 型号	Freq. Range (MHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBCI6060E	56~86	Full	1.5	16	1.4	60	30	N, SMA	-10~+60	60 × 60 × 28
UIYBCI6060A	68~88	Full	1.3	18	1.3	100	30	N, SMA	-10~+65	60 × 60 × 28
UIYBCI6060B	88~108	Full	0.65	20	1.25	100	30	N, SMA	-20~+70	60 × 60 × 28
UIYBCI6060C	130~180	Full	0.8	18	1.3	100	30	N, SMA	-20~+70	60 × 60 × 28
UIYBCI6060D	136~174	Full	0.65	20	1.25	100	30	N, SMA	-20~+70	60 × 60 × 28
UIYBCI6060F	225~400	Full	0.8	18	1.3	160	50	N, SMA	0~+60	60 × 60 × 28
			1.0	16	1.4				-40~+85	
UIYBCI6075F	225~400	Full	0.8	18	1.3	160	100	N, SMA	0~60	60 × 75 × 28
			1.0	16	1.4				-40~+85	
UIYBCI6060H	300~475	Full	0.8	18	1.3	100	50	N, SMA	25 ± 5	60 × 60 × 28
			1.0	17	1.35				-40~+85	
UIYBCI3538A	380~460	Full	0.5	18	1.3	300	30	N, SMA	-30~+70	35 × 38 × 15
UIYBCI3538B	400~470	Full	0.4	20	1.25	300	30	N, SMA	-30~+70	35 × 38 × 15
UIYBCI3538C	600~800	Full	0.5	18	1.3	300	30	N, SMA	-30~+70	35 × 38 × 15
UIYBCI6060G	600~900	Full	0.5	16	1.4	300	30	N, SMA	-30~+75	60 × 60 × 26
UIYBCI3434B	700~900	Full	0.4	18	1.3	200	30	N, SMA	-30~+70	34 × 34 × 22
UIYBCI3434A	800~1000	Full	0.4	20	1.25	200	30	N, SMA	-30~+70	34 × 34 × 22
UIYBCI3434D	950~1415	Full	0.6	18	1.3	200	30	N, SMA	0~+60	34 × 34 × 22
UIYBCI4550A	950~1450	Full	0.6	16	1.4	200	30	N, SMA	-30~+70	45 × 50 × 24
UIYBCI3232A	960~1215	Full	0.4	20	1.25	200	30	N, SMA	-30~+70	32 × 32 × 18
UIYBCI3434F	1225~1875	Full	0.6	16	1.4	200	30	N, SMA	0~+60	34 × 34 × 22
Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBCI7272A	0.8~2.0	Full	1.3	12	1.6	300	30	N, SMA	+10~+70	72 × 72 × 27.4
UIYBCI6466A	1.0~2.0	Full	0.6	17	1.4	100	30	N, SMA	+10~+70	64 × 66 × 26
UIYBCI14272A	1.0~2.0	Full	1.4	34	1.35	300	30	N, SMA	+10~+70	142 × 72 × 27.4
UIYBCI3434G	1.0~1.3	Full	0.4	20	1.25	200	30	N, SMA	-30~+70	34 × 34 × 22
UIYBCI3434C	1.0~1.5	Full	0.6	16	1.4	200	30	N, SMA	0~+65	34 × 34 × 22
UIYBCI5049A	1.35~2.7	Full	0.5	18	1.3	100	30	N, SMA	0~+70	50.8 × 49.5 × 19
UIYBCI10149A	1.35~2.7	Full	1.0	36	1.3	100	30	N, SMA	0~+70	101.6 × 49.5 × 19
UIYBCI5049B	1.5~3.0	Full	0.5	17	1.35	100	30	N, SMA	0~+70	50.8 × 49.5 × 19
UIYBCI10149B	1.5~3.0	Full	1.0	34	1.35	100	30	N, SMA	0~+70	101.6 × 49.5 × 19
UIYBCI3232B	1.6~2.0	Full	0.5	18	1.3	200	30	N, SMA	-20~+65	32 × 32 × 18
UIYBCI3232C	1.7~2.2	Full	0.6	18	1.3	200	30	N, SMA	-30~+70	32 × 32 × 18

Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBCI4040A	1.7~3.5	Full	0.7	17	1.4	100	30	N, SMA	0~+70	40 × 40 × 20
UIYBCI3232D	1.8~2.4	Full	0.5	18	1.3	200	30	N, SMA	-30~+70	32 × 32 × 18
UIYBCI4040B	1.85~3.8	Full	0.7	17	1.35	100	30	N, SMA	0~+70	40 × 40 × 20
UIYBCI3234A	2.0~4.0	Full	0.6	18	1.3	100	30	N, SMA	+10~+70	32 × 34 × 21
UIYBCI6434A	2.0~4.0	Full	1.2	36	1.3	100	30	N, SMA	+10~+70	64 × 34 × 21
UIYBCI3038A	2.0~6.0	Full	0.8	13	1.5	100	100	N, SMA	-40~+70	30.5 × 38.5 × 15
UIYBCI6236B	2.0~8.0	Full	1.8	14	1.6	100	20	SMA	+10~+70	62 × 36.6 × 19.4
UIYBCI2528A	3.0~6.0	Full	0.5	18	1.3	100	30	N, SMA	-55~+85	25.4 × 28 × 14
UIYBCI5028A	3.0~6.0	Full	1.0	36	1.3	100	30	N, SMA	-55~+85	50.8 × 28 × 14
UIYBCI2528B	3.5~6.5	Full	0.6	17	1.35	100	30	N, SMA	-55~+85	25.4 × 28 × 14
UIYBCI2122A	4.0~8.0	Full	0.5	18	1.3	100	20	N, SMA	-55~+85	21 × 22.5 × 15
UIYBCI4222A	4.0~8.0	Full	1.0	36	1.3	100	20	N, SMA	-55~+85	42 × 22.5 × 15
UIYBCI1621A	6.0~18.0	Full	1.5	10	1.9	60	10	SMA	-30~+70	16 × 21.5 × 14
UIYBCI1318A	8.0~12.0	Full	0.5	18	1.3	60	10	SMA	-55~+85	13 × 18 × 13.8
UIYBCI2618A	8.0~12.0	Full	1.0	36	1.3	60	10	SMA	-55~+85	26 × 18 × 13.8
UIYBCI1621B	8.0~18.0	Full	0.8	16	1.45	60	10	SMA	-30~+70	16 × 21.5 × 14
UIYBCI1318B	12.0~18.0	Full	0.5	18	1.3	60	10	SMA	-55~+85	13 × 18 × 13.8
UIYBCI2618B	12.0~18.0	Full	1.0	36	1.3	60	10	SMA	-55~+85	26 × 18 × 13.8
UIYBCI1025A	18.0~26.5	Full	0.7	20	1.3	10	2	2.92mm	-40~+70	10.2 × 25.6 × 12.5
	23.0~28.0	Full	0.9	20	1.3	10	2	2.92mm	-40~+70	10.2 × 25.6 × 12.5
UIYBCI1326A	26.5~40.0	Full	1.2	15	1.5	10	2	2.92mm	-55~+85	13 × 26 × 16.6

Drop in type from 56MHz to 40GHz

Model No. 型号	Freq. Range (MHz) 频率范围	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBDI6060E	56~86	Full	1.5	16	1.4	60	30	TAB	+10~+60	60 × 60 × 28
UIYBDI6060A	68~88	Full	1.3	18	1.3	100	30	TAB	-10~+65	60 × 60 × 28
UIYBDI6060B	88~108	Full	0.65	20	1.25	100	30	TAB	-20~+70	60 × 60 × 28
UIYBDI6060C	130~180	Full	0.8	18	1.3	100	30	TAB	-20~+70	60 × 60 × 28
UIYBDI6060D	136~174	Full	0.65	20	1.25	100	30	TAB	-20~+70	60 × 60 × 28
UIYBDI6060F	225~400	Full	0.8	18	1.3	160	50	TAB	0~60	60 × 60 × 28
			1.0	16	1.4				-40~+85	
UIYBDI6075F	225~400	Full	0.8	18	1.3	160	100	TAB	0~60	60 × 75 × 28
			1.0	16	1.4				-40~+85	
UIYBDI6060H	300~475	Full	0.8	18	1.3	100	50	TAB	25 ± 5	60 × 60 × 28
			1.0	17	1.35				-40~+85	
UIYBDI3538A	380~460	Full	0.5	18	1.3	300	30	TAB	-30~+70	35 × 38 × 11
UIYBDI3538B	400~470	Full	0.4	20	1.25	300	30	TAB	-30~+70	35 × 38 × 11
UIYBDI3538C	600~800	Full	0.5	18	1.3	300	30	TAB	-30~+70	35 × 38 × 11
UIYBDI3232A	700~900	Full	0.5	20	1.2	250	30	TAB	-30~+70	32 × 32 × 11
UIYBDI2525A	800~1000	Full	0.6	18	1.3	200	30	TAB	-30~+70	25.4 × 25.4 × 10.5
UIYBDI3538F	950~1415	Full	0.6	16	1.4	300	30	TAB	0~+70	35 × 38 × 13
UIYBDI2525B	960~1215	Full	0.5	20	1.25	200	30	TAB	-30~+70	25.4 × 25.4 × 10.5
UIYBDI3538E	1225~1875	Full	0.6	16	1.4	300	30	TAB	0~+70	35 × 38 × 13

Model No. 型号	Freq. Range (Ghz) 频率范围	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBDI7272A	0.8~2.0	Full	1.3	12	1.6	300	30	TAB	+10~+70	72 × 72 × 27.4
UIYBDI6466A	1.0~2.0	Full	0.6	17	1.4	100	30	TAB	+10~+70	64 × 66 × 26
UIYBDI14272A	1.0~2.0	Full	1.4	32	1.35	300	30	TAB	+10~+70	142 × 72 × 27.4
UIYBDI3538D	1.0~1.3	Full	0.4	20	1.25	300	30	TAB	-30~+70	35 × 38 × 11
UIYBDI5049A	1.35~2.7	Full	0.5	18	1.3	100	30	TAB	0~+70	50.8 × 49.5 × 19
UIYBDI10149A	1.35~2.7	Full	1.0	36	1.3	100	30	TAB	0~+70	101.6 × 49.5 × 19
UIYBDI5049B	1.5~3.0	Full	0.5	17	1.35	100	30	TAB	0~+70	50.8 × 49.5 × 19
UIYBDI10149B	1.5~3.0	Full	1.0	34	1.35	100	30	TAB	0~+70	101.6 × 49.5 × 19
UIYBDI4040A	1.7~3.5	Full	0.7	17	1.4	100	30	TAB	0~+70	40 × 40 × 20
UIYBDI2525C	1.8~2.0	Full	0.4	20	1.25	200	30	TAB	-30~+70	25.4 × 25.4 × 10.5
UIYBDI4040B	1.85~3.8	Full	0.7	17	1.35	100	30	TAB	0~+70	40 × 40 × 20
UIYBDI3234A	2.0~4.0	Full	0.6	18	1.3	100	30	TAB	+10~+70	32 × 34 × 21
UIYBDI6434A	2.0~4.0	Full	1.2	36	1.3	100	30	TAB	+10~+70	64 × 34 × 21
UIYBDI3038A	2.0~6.0	Full	0.8	13	1.5	100	60	TAB	-40~+70	30.5 × 38.5 × 15
UIYBDI2528A	3.0~6.0	Full	0.5	18	1.3	100	30	TAB	-55~+85	25.4 × 28 × 14
UIYBDI5028A	3.0~6.0	Full	1.0	36	1.3	100	30	TAB	-55~+85	50.8 × 28 × 14
UIYBDI2528B	3.5~6.5	Full	0.5	18	1.3	100	30	TAB	-55~+85	25.4 × 28 × 14
UIYBDI2122A	4.0~8.0	Full	0.5	18	1.3	100	20	TAB	-55~+85	21 × 22.5 × 15
UIYBDI4222A	4.0~8.0	Full	1.0	36	1.3	100	20	TAB	-55~+85	42 × 22.5 × 15
UIYBDI1621A	6.0~18.0	Full	1.5	10	1.9	60	10	TAB	-30~+70	16 × 21.5 × 14
UIYBDI815A	8.0~12.0	Full	0.5	18	1.3	30	2	TAB	-55~+85	8.9 × 15 × 7.8
UIYBDI1716A	8.0~12.0	Full	1.0	36	1.3	30	2	TAB	-55~+85	17.6 × 16.5 × 7.5
UIYBDI1621B	8.0~18.0	Full	0.8	16	1.45	60	10	TAB	-30~+70	16 × 21.5 × 14
UIYBDI815B	12.0~18.0	Full	0.6	18	1.35	30	2	TAB	-55~+85	8.9 × 15 × 7.8
UIYBDI1716B	12.0~18.0	Full	1.2	36	1.35	30	2	TAB	-55~+85	17.6 × 16.5 × 7.5
UIYBDI1025A	18.0~26.5	Full	0.7	20	1.3	10	2	TAB	-40~+70	10.2 × 25.6 × 12.5
	23.0~28.0	Full	0.9	20	1.3	10	2	TAB	-40~+70	10.2 × 25.6 × 12.5
UIYBDI1326A	26.5~40.0	Full	1.2	15	1.5	10	2	TAB	-55~+85	13 × 26 × 16.6

Dual Junction Isolator 双节隔离器

- Frequency range 10MHz to 40GHz, up to 500W power.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Coaxial type from 10MHz to 27.5GHz, FM,VHF,UHF,GSM,CDMA,WCDMA,LTE,L.S.C.X band, etc

Model No. 型号	Freq.Range (MHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYCDI16080A	10~55	20%	2.4	40	1.25	50	50	N, SMA	+10~+60	160 × 80 × 28
UIYCDI12060A	45~270	40%	0.8	50	1.15	200	50	N, SMA	-20~+65	120 × 60 × 28
UIYCDI12075A	45~270	40%	0.8	50	1.15	200	100	N, SMA	-20~+65	120 × 75 × 28
UIYCDI11256A	130~900	40%	0.6	46	1.2	300	30	N, SMA	-30~+70	112 × 56 × 15
UIYCDI9648A	250~1300	30%	0.6	50	1.15	400	30	N, SMA	-30~+70	96 × 48 × 24
UIYCDI9678A	250~1300	30%	0.6	50	1.15	400	250	N, SMA	-30~+70	96 × 78 × 24
UIYCDI7038A	200~1875	30%	0.4	60	1.15	300	30	N, SMA	-40~+85	70 × 38 × 15
UIYCDI7048A	200~1875	30%	0.4	60	1.15	300	100	N, SMA	-40~+85	70 × 48.5 × 15
UIYCDI6834A	700~2000	40%	0.6	45	1.2	200	30	N, SMA	-40~+85	68 × 34 × 22
UIYCDI6432A	700~3500	25%	0.6	50	1.15	200	30	N, SMA	-40~+85	64 × 32 × 18
UIYCDI3928A	3500~7000	20%	0.6	45	1.2	60	5	SMA	-40~+85	39 × 28 × 15
UIYCDI2618A	6000~27500	20%	0.6	45	1.2	60	5	SMA, 2.92mm	-55~+85	26 × 18 × 12.7
UIYBCI14272A	1000~2000	Full	1.4	32	1.4	300	30	N, SMA	+10~+70	142 × 72 × 27.4
UIYBCI10149A	1350~2700	Full	1.4	32	1.35	100	30	N, SMA	0~+70	101.6 × 49.5 × 19
UIYBCI10149B	1500~3000	Full	1.0	34	1.35	100	30	N, SMA	0~+70	101.6 × 49.5 × 19
UIYBCI6434A	2000~4000	Full	1.2	36	1.3	100	30	N, SMA	+10~+70	64 × 34 × 21
UIYBCI5028A	3000~6000	Full	1.0	36	1.3	100	30	N, SMA	-55~+85	50.8 × 28 × 14
UIYBCI4222A	4000~8000	Full	1.0	36	1.3	100	20	N, SMA	-55~+85	42 × 22.5 × 15
UIYBCI2618A	8000~12000	Full	1.0	36	1.3	60	10	SMA	-55~+85	26 × 18 × 13.8
UIYBCI2618B	12000~18000	Full	1.0	36	1.3	60	10	SMA	-55~+85	26 × 18 × 13.8

Drop in type from 10MHz to 20GHz, FM,VHF,UHF,GSM,CDMA,WCDMA,LTE,L.S.C.X band, etc

Model No. 型号	Freq.Range (MHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDDI16080A	10~55	20%	2.4	40	1.25	50	50	TAB	+10~+60	160 × 80 × 28
UIYDDI12060A	45~270	40%	0.8	50	1.15	200	50	TAB	-20~+65	120 × 60 × 28
UIYDDI12075A	45~270	40%	0.8	50	1.15	200	100	TAB	-20~+65	120 × 75 × 28
UIYDDI11256A	130~900	40%	0.6	46	1.2	300	30	TAB	-30~+70	112 × 56 × 15
UIYDDI5025A	200~3600	30%	0.4	50	1.15	200	30	TAB	-40~+85	50.8 × 25.4 × 8.6
UIYDDI5031A	200~3600	30%	0.4	50	1.15	200	100	TAB	-40~+85	50.8 × 31.7 × 8.6
UIYDDI7038A	200~1875	30%	0.4	60	1.15	300	30	TAB	-40~+85	70 × 38 × 11
UIYDDI7046A	200~1875	30%	0.4	60	1.15	300	100	TAB	-40~+85	70 × 46 × 11

Model No. 型号	Freq. Range (MHz) 频率范围	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDDI4027A	450~3000	30%	0.5	50	1.15	100	100	TAB	-40~+85	40 × 27.5 × 8.6
UIYDDI3819A	600~5000	30%	0.5	50	1.15	100	30	TAB	-40~+85	38 × 19 × 8.2
UIYDDI2420A	4000~7000	20%	0.6	45	1.2	60	5	TAB	-40~+85	42 × 20 × 8
UIYDDI1716A	5000~25000	40%	0.6	46	1.2	30	5	TAB	-40~+85	17.6 × 16.5 × 7.5
UIYBDI14272A	1000~2000	Full	1.4	32	1.4	300	30	TAB	+10~+70	142 × 72 × 27.4
UIYBDI10149A	1350~2700	Full	1.4	32	1.35	100	30	TAB	0~+70	101.6 × 49.5 × 19
UIYBDI10149B	1500~3000	Full	1.0	34	1.35	100	30	TAB	0~+70	101.6 × 49.5 × 19
UIYBDI6434A	2000~4000	Full	1.2	36	1.3	100	30	TAB	+10~+70	64 × 34 × 21
UIYBDI5028A	3000~6000	Full	1.0	36	1.3	100	20	TAB	-55~+85	50.8 × 28 × 14
UIYBDI4222A	4000~8000	Full	1.0	36	1.3	100	20	TAB	-55~+85	42 × 22.5 × 15
UIYBDI1716A	8000~12000	Full	1.0	36	1.3	30	2	TAB	-55~+85	17.6 × 16.5 × 7.5
UIYBDI1716B	12000~18000	Full	1.2	36	1.35	30	2	TAB	-55~+85	17.6 × 16.5 × 7.5

Surface Mount Isolator 表面封装隔离器


- Frequency range 200MHz to 15GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYSI25A	0.2~3.6	30%	0.2	25	1.15	100	10	SMT	-40~+85	Φ25.4 × 9
UIYSI36A	0.2~1.875	40%	0.2	30	1.15	200	10	SMT	-30~+70	Φ36 × 11
UIYSI20A	0.4~3.0	16%	0.25	25	1.15	60	10	SMT	-40~+85	Φ20.4 × 8.6
UIYSI15A	0.7~5.0	15%	0.3	23	1.2	60	10	SMT	-40~+85	Φ15.5 × 7
UIYSI12A	0.7~10.0	20%	0.3	23	1.2	30	10	SMT	-40~+85	Φ12.7 × 8
UIYSI10A	2.4~6.0	20%	0.3	21	1.2	30	10	SMT	-40~+85	Φ9.8 × 7

Microstrip Isolator 微带隔离器

- Frequency range 2.7 to 40GHz
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.

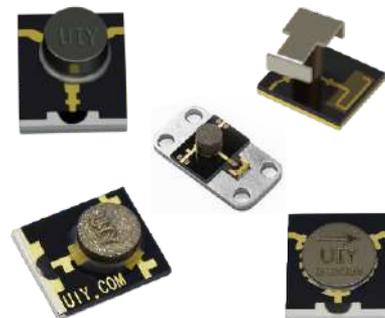

Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYMI1416A	2.7~4.9	40%	0.4	20	1.2	15	5	Microstrip	-55~+85	14 × 16 × 5
UIYMI1212A	3.9~5.9	25%	0.4	20	1.2	15	5	Microstrip	-55~+85	12 × 12 × 4
UIYMI1010A	5.0~8.0	45%	0.4	20	1.25	15	5	Microstrip	-55~+85	10 × 10 × 4
UIYBMI129A	6.0~18.0	Full	1.4	14	1.7	10	1	Microstrip	-55~+85	12 × 9.7 × 6.0
	8.0~18.0	Full	1.0	15	1.6					
UIYMI78A	7.0~12.0	40%	0.5	20	1.25	15	5	Microstrip	-55~+85	7 × 8 × 3.5
UIYBMI67B	8.0~12.0	Full	0.6	17	1.35	10	3	Microstrip	-55~+85	6 × 7 × 3.5
UIYBMI78A	8.0~12.0	Full	0.6	18	1.35	10	3	Microstrip	-55~+85	7 × 8 × 3.0
UIYMI67A	8.0~18.0	45%	0.5	20	1.25	15	3	Microstrip	-55~+85	6 × 7 × 3.5
UIYBMI67A	11.0~18.0	Full	0.9	15	1.45	10	3	Microstrip	-55~+85	6 × 7 × 3
UIYMI56A	14.0~40.0	20%	0.5	20	1.25	10	3	Microstrip	-55~+85	5 × 6 × 3.5
UIYMI45A	18.0~24.0	20%	0.6	17	1.3	2	2	Microstrip	-55~+85	4.5 × 5.5 × 3.5
UIYMI45B	22.0~32.0	25%	0.7	17	1.3	2	2	Microstrip	-55~+85	4.5 × 5.5 × 3.5
UIYMI44A	24.0~40.0	15%	0.7	15	1.4	15	2	Microstrip	-55~+85	4 × 4 × 3
UIYMI44B	24.0~40.0	15%	0.7	15	1.4	15	4	Microstrip	-55~+85	4 × 4.6 × 3
UIYMI44C	37.0~43.0	100%	1.4	14	1.5	2	2	Microstrip	-55~+85	4 × 4.5 × 4

Waveguide Isolator 波导隔离器

- Frequency range 2.4 to 110GHz.
- Military, space and commercial applications.
- Low insertion loss,high isolation,high power handling.
- Custom design available upon request.



Model No. 型号	Freq.Range (GHz) 频率范围	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYWI49100A	5.4~8.0	20%	0.25	25	1.2	100	30	WR137(BJ70)	-40~+85	68.3 × 80 × 49.2
UIYWI4876A	7.0~10.0	20%	0.25	25	1.2	100	30	WR112(BJ84)	-40~+85	48 × 76 × 36
UIYWI4893A	8.0~12.0	Full	0.5	18	1.3	100	30	WR90(BJ100)	-40~+85	48 × 93 × 42
UIYWI4242A	8.0~12.4	25%	0.25	25	1.2	100	30	WR90(BJ100)	-40~+85	42 × 42 × 28
UIYWI4444A	10.0~15.0	20%	0.25	25	1.2	100	30	WR75(BJ120)	-40~+85	44.5 × 44.5 × 38.1
UIYWI3898A	12.0~18.0	Full	0.4	20	1.3	100	30	WR62(BJ140)	-40~+85	33.3 × 98 × 38
UIYWI3333A	12.4~18.0	20%	0.25	25	1.2	100	30	WR62(BJ140)	-40~+85	33 × 33 × 21
UIYWI2238A	17.7~21.6	90%	0.3	20	1.22	30	15	WR42(BJ220)	-55~+85	22.4 × 38 × 18
UIYWI2869A	18.0~26.5	Full	0.3	20	1.25	100	30	WR42(BJ220)	-40~+85	22.4 × 69 × 28
UIYWI3060A	19.2~31.0	Full	0.4	18	1.3	50	20	WR34(BJ260)	-40~+85	30 × 60 × 22.4
UIYWI3060B	21.7~33.0	15%	0.3	20	1.2	60	30	WR34(BJ260)	-40~+70	30 × 60 × 22.4
UIYWI2260A	22.0~33.0	Full	0.3	18	1.3	60	30	WR34(BJ260)	-40~+70	30 × 60 × 22.4
UIYWI2259A	26.5~40.0	Full	0.45	16	1.4	25	10	WR28(BJ320)	-40~+85	25.5 × 59.9 × 25.9
UIYWI2445A	26.5~40.0	10%	0.3	20	1.2	40	40	WR28(BJ320)	-40~+85	24 × 45 × 19.1
UIYWI1940A	27.0~31.0	Full	0.4	18	1.3	10	1	WR28(BJ320)	-40~+70	19 × 40 × 10
UIYWI2262A	27.0~31.0	Full	0.3	20	1.2	120	50	WR28(BJ320)	-40~+85	22.5 × 62.9 × 25.9
UIYWI1931A	27.0~31.0	Full	0.4	20	1.2	50	20	WR28(BJ320)	-40~+85	19 × 31.75 × 12.7
UIYWI1938A	29.0~31.0	Full	0.3	20	1.2	40	15	WR28(BJ320)	-40~+85	14 × 38 × 19
UIYWI2025B	33.0~38.0	Full	0.3	20	1.3	25	10	WR28(BJ320)	-40~+85	20 × 25 × 10
UIYWI2836A	33.0~50.0	Full	0.4	18	1.3	10	1	WR22(BJ400)	-40~+85	28.6 × 36.7 × 12.7
UIYWI1957A	43.0~46.0	Full	0.4	18	1.35	80	15	WR22(BJ400)	-40~+85	19.1 × 57.0 × 30
UIYWI1636A	47.0~51.5	Full	0.4	18	1.3	10	1	WR18(BJ500)	-40~+85	16 × 36 × 30
UIYWI2128A	50.0~60.0	Full	0.8	18	1.4	10	1	WR15(BJ620)	-40~+70	21 × 28 × 15
UIYWI2025A	51.0~59.0	Full	0.6	18	1.4	10	1	WR15(BJ620)	-40~+70	20 × 25.5 × 15
UIYWI1925A	71.0~86.0	10%	1.0	18	1.4	10	2	WR12(BJ740)	-55~+75	19.1 × 25.5 × 15
UIYWI1930A	81.0~86.0	Full	1.0	18	1.35	10	1	WR10(BJ900)	-40~+70	19.1 × 30 × 13.4
UIYWI2030A	93.5~94.5	Full	0.6	20	1.2	10	2	WR10(BJ900)	-40~+85	20 × 30 × 20

Coaxial Circulator 同轴环行器

- Frequency range 10MHz to 40GHz, up to 3KW power.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Low frequency from 10MHz to 1875MHz, FM, VHF, UHF, etc

Model No. 型号	Freq.Range (MHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYCC8080A	10~55	20%	1.2	20	1.25	50	50	N, SMA	+10~+65	80 × 80 × 28
UIYCC6060A	45~270	40%	0.5	25	1.15	200	200	N, SMA	-30~+70	60 × 60 × 28
UIYCC8080B	60~200	20%	0.3	23	1.2	500	500	N	0~+70	80 × 80 × 18
UIYCC100100A	70~130	20%	0.5	20	1.25	500	500	N	0~+70	100 × 100 × 40
UIYCC120140A	100~200	2%	0.4	23	1.2	1000 Peak 10KW	1000 Peak 10KW	7/16	0~+85	120 × 140 × 50
UIYCC5656A	130~900	40%	0.3	23	1.2	300	300	N, SMA	-30~+70	56 × 56 × 15
UIYCC3538A	200~1875	40%	0.2	30	1.15	300	300	N, SMA	-40~+85	35 × 38 × 15
UIYBCC6060F	225~400	Full	0.8	18	1.3	160	160	N, SMA	0~+60	60 × 60 × 28
			1.0	16	1.4				-40~+85	
UIYCC4550A	250~1500	30%	0.3	23	1.15	300	300	N, SMA	-30~+70	45 × 50 × 24
UIYBCC6060H	300~475	Full	0.8	18	1.3	100	100	N, SMA	25 ± 5	60 × 60 × 28
			1.0	17	1.35				-40~+85	
UIYCC5356A	300~1500	18%	0.3	23	1.2	500	500	N	-40~+85	53 × 56 × 20

700MHz to 40GHz, GSM,CDMA,WCDMA,LTE,L.S.C.X band, etc

Model No. 型号	Freq.Range (GHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYCC3434A	0.7~2.0	40%	0.3	23	1.15	200	200	N, SMA	-40~+85	34 × 34 × 22
UIYCC3232A	0.7~2.5	35%	0.3	23	1.15	200	200	N, SMA	-40~+85	32 × 32 × 18
UIYCC2528A	0.7~5.0	30%	0.3	23	1.15	200	200	N, SMA	-40~+85	25.4 × 28.5 × 15
UIYCC4546A	1.0~3.8	15%	0.3	23	1.2	600	600	N	-40~+85	45 × 46 × 26
UIYCC104110A	2.0~4.0	10%	0.4	18	1.3	3000 Peak 30KW	3000 Peak 30KW	7/16	-55~+85	104 × 110 × 48
UIYCC1522A	4.0~7.2	25%	0.3	23	1.2	60	60	N, SMA	-40~+85	15 × 22.5 × 13.8
UIYCC2525A	4.0~8.0	20%	0.3	23	1.2	300	300	N	-20~+70	25 × 25.5 × 18
UIYCC1318A	6.0~36.0	75%	0.3	23	1.2	60	60	SMA, 2.92mm	-55~+85	13 × 18 × 13.8
UIYBCC1325A	18.0~26.5	Full	1.6	14	1.6	10	10	SMA	-55~+85	13 × 25 × 16.6
UIYBCC1316A	26.5~40.0	Full	1.2	15	1.5	10	10	2.92mm	-55~+85	13 × 16 × 12.6

Drop in Circulator 带线（嵌入式）环行器

- Frequency range 10MHz to 40GHz, up to 2000W Power.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Low frequency from 10MHz to 3600MHz, FM, VHF, UHF, etc

Model No. 型号	Freq.Range (MHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDC8080A	10~55	20%	1.2	20	1.25	50	50	TAB	+10~+60	80 × 80 × 28
UIYDC6060A	45~270	40%	0.5	25	1.15	200	200	TAB	-30~+70	60 × 60 × 28
UIYDC8080B	60~200	20%	0.3	23	1.2	500	500	TAB	0~+70	80 × 80 × 18
UIYDC100100A	70~130	20%	0.5	20	1.25	500	500	TAB	0~+70	100 × 100 × 40
UIYDC5656A	130~900	40%	0.3	23	1.2	300	300	TAB	-30~+70	56 × 56 × 15
UIYDC3538A	200~1875	40%	0.2	30	1.15	300	300	TAB	-40~+85	35 × 38 × 11
UIYDC2525A	200~3600	30%	0.2	25	1.15	200	200	TAB	-40~+85	25.4 × 25.4 × 10.5
UIYBDC6060F	225~400	Full	0.8	18	1.3	160	160	TAB	0~60	60 × 60 × 28
			1.0	16	1.4				-40~+85	
UIYDC4242A	250~1300	35%	0.25	25	1.15	300	300	TAB	-30~+70	42 × 42 × 13
UIYBDC6060H	300~475	Full	0.8	18	1.3	100	100	TAB	25 ± 5	60 × 60 × 28
			1.0	17	1.35				-40~+85	
UIYDC5356A	300~1500	18%	0.3	23	1.2	500	500	TAB	-40~+85	53 × 56 × 20

450MHz to 40GHz, GSM,CDMA,WCDMA,LTE,L.S.C.X band, etc

Model No. 型号	Freq.Range (GHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDC2020A	0.4~3.0	30%	0.25	25	1.15	100	100	TAB	-40~+85	20 × 20 × 10.6
UIYDC1919A	0.6~5.0	30%	0.25	25	1.15	100	100	TAB	-40~+85	19 × 19 × 8.6
UIYDC3232A	0.7~3.1	30%	0.3	23	1.15	200	200	TAB	-40~+85	32 × 32 × 11
UIYDC1212B	0.7~10.0	30%	0.3	23	1.2	60	60	TAB	-40~+85	12.7 × 12.7 × 8
UIYDC4546A	1.0~3.8	15%	0.3	23	1.2	600	600	TAB	-40~+85	45 × 46 × 26
UIYDC1220A	4.0~8.0	25%	0.25	23	1.2	60	60	TAB	-55~+85	12 × 20 × 8
UIYDC815A	5.0~25.0	40%	0.3	23	1.2	65	65	TAB	-55~+85	8.9 × 15 × 7.8
UIYDC1318A	17.0~40.0	20%	0.5	20	1.25	30	30	TAB	-40~+85	13 × 18 × 13.8
UIYBDC1325A	18.0~26.5	Full	1.6	14	1.6	10	10	TAB	-55~+85	13 × 25 × 16.6
UIYBDC1316A	26.5~40.0	Full	1.2	15	1.5	10	10	TAB	-55~+85	13 × 16 × 12.6

Broadband Circulator 宽带环行器

- Frequency range 56MHz to 40GHz, up to 2000W power.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Coaxial type from 56MHz to 40GHz

Model No. 型号	Freq. Range (MHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBCC6060E	56~86	Full	1.5	16	1.4	60	60	N, SMA	-10~+60	60 × 60 × 28
UIYBCC6060A	68~88	Full	1.3	18	1.3	100	100	N, SMA	-10~+65	60 × 60 × 28
UIYBCC6060B	88~108	Full	0.65	20	1.25	100	100	N, SMA	-20~+70	60 × 60 × 28
UIYBCC6060C	130~180	Full	0.8	18	1.3	100	100	N, SMA	-20~+70	60 × 60 × 28
UIYBCC6060D	136~174	Full	0.65	20	1.25	100	100	N, SMA	-20~+70	60 × 60 × 28
UIYBCC6060F	225~400	Full	0.8	18	1.3	160	160	N, SMA	0~+60	60 × 60 × 28
			1.0	16	1.4				-40~+85	
UIYBCC6060H	300~475	Full	0.8	18	1.3	100	100	N, SMA	25 ± 5	60 × 60 × 28
			1.0	17	1.35				-40~+85	
UIYBCC3538A	380~460	Full	0.5	18	1.3	300	300	N, SMA	-30~+70	35 × 38 × 15
UIYBCC3538B	400~470	Full	0.4	20	1.25	300	300	N, SMA	-30~+70	35 × 38 × 15
UIYBCC3538C	600~800	Full	0.5	18	1.3	300	300	N, SMA	-30~+70	35 × 38 × 15
UIYBCC6060G	600~900	Full	0.5	16	1.4	100	100	N, SMA	-30~+75	60 × 60 × 26
UIYBCC3434B	700~900	Full	0.4	18	1.3	200	200	N, SMA	-30~+70	34 × 34 × 22
UIYBCC3434A	800~1000	Full	0.4	20	1.25	200	200	N, SMA	-30~+70	34 × 34 × 22
UIYBCC3434D	950~1415	Full	0.6	18	1.3	200	200	N, SMA	0~+60	34 × 34 × 22
UIYBCC4550A	950~1450	Full	0.6	16	1.4	200	200	N, SMA	-30~+70	45 × 50 × 26
UIYBCC3232A	960~1215	Full	0.4	20	1.25	200	200	N, SMA	-30~+70	32 × 32 × 18
UIYBCC3434F	1225~1875	Full	0.6	16	1.4	200	200	N, SMA	0~+60	34 × 34 × 22

Model No. 型号	Freq. Range (Ghz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBCC7272A	0.8~2.0	Full	1.3	12	1.6	300	300	N, SMA	+10~+70	72 × 72 × 27.4
UIYBCC6466A	1.0~2.0	Full	0.6	17	1.4	100	100	N, SMA	+10~+70	64 × 66 × 26
UIYBCC14272A	1.0~2.0	Full	1.4	32	1.4	300	300	N, SMA	+10~+70	142 × 72 × 27.4
UIYBCC14272A4P	1.0~2.0	Full	1.4	33	1.4	300	300	N, SMA	+10~+70	142 × 72 × 27.4
UIYBCC7272B	1.0~2.0	Full	0.7	16	1.4	500	500	N	+10~+60	72 × 72 × 46
UIYBCC3434G	1.0~1.3	Full	0.4	20	1.25	200	200	N, SMA	-30~+70	34 × 34 × 22
UIYBCC3538D	1.0~1.3	Full	0.4	20	1.25	300	300	N, SMA	-30~+70	35 × 38 × 15
UIYBCC3434C	1.0~1.5	Full	0.6	16	1.4	200	200	N, SMA	0~+60	34 × 34 × 22
UIYBCC5049A	1.35~2.7	Full	0.5	18	1.3	100	100	N, SMA	0~+70	50.8 × 49.5 × 19
UIYBCC10149A	1.35~2.7	Full	1.0	36	1.3	100	100	N, SMA	0~+70	101.6 × 49.5 × 19
UIYBCC10149A4P	1.35~2.7	Full	1.0	36	1.3	100	100	N, SMA	0~+70	101.6 × 49.5 × 19

Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBCC5049B	1.5~3.0	Full	0.5	17	1.35	100	100	N, SMA	0~+70	50.8×49.5×19
UIYBCC10149B	1.5~3.0	Full	1.0	34	1.35	100	100	N, SMA	0~+70	101.6×49.5×19
UIYBCC10149B4P	1.5~3.0	Full	1.0	34	1.35	100	100	N, SMA	0~+70	101.6×49.5×19
UIYBCC3232B	1.6~2.0	Full	0.5	18	1.3	200	200	N, SMA	-20~+65	32×32×18
UIYBCC3232C	1.7~2.2	Full	0.6	18	1.3	200	200	N, SMA	-30~+70	32×32×18
UIYBCC4040A	1.7~3.5	Full	0.7	17	1.4	100	100	N, SMA	0~+70	40×40×20
UIYBCC3232D	1.8~2.4	Full	0.5	18	1.3	200	200	N, SMA	-30~+70	32×32×18
UIYBCC4040B	1.85~3.8	Full	0.7	17	1.35	100	100	N, SMA	0~+70	40×40×20
UIYBCC3234A	2.0~4.0	Full	0.6	17	1.35	100	100	N, SMA	+10~+70	32×34×21
UIYBCC6434A	2.0~4.0	Full	1.2	34	1.35	100	100	N, SMA	+10~+70	64×34×21
UIYBCC5972A	2.0~4.0	Full	0.6	16	1.4	500	500	N	+10~+60	59.4×72×50
UIYBCC3030A	2.0~6.0	Full	0.8	13	1.5	100	100	N, SMA	-40~+70	30.5×30.5×15
UIYBCC2528A	3.0~6.0	Full	0.5	18	1.3	100	100	N, SMA	-55~+85	25.4×28×14
UIYBCC5028A	3.0~6.0	Full	1.0	36	1.3	100	100	N, SMA	-55~+85	50.8×28×14
UIYBCC2122A	4.0~8.0	Full	0.5	18	1.3	100	100	N, SMA	-55~+85	21×22.5×15
UIYBCC4222A	4.0~8.0	Full	1.0	36	1.3	100	100	N, SMA	-55~+85	42×22.5×15
UIYBCC5654A	4.0~8.0	Full	0.6	16	1.4	300	300	N	-30~+70	56×54.3×36
UIYBCC1920A	6.0~18.0	Full	1.5	10	1.9	60	60	SMA	-30~+70	19×20.3×14
UIYBCC1318A	8.0~12.0	Full	0.5	18	1.3	60	60	SMA	-55~+85	13×18×13.8
UIYBCC2618A	8.0~12.0	Full	1.0	36	1.3	60	60	SMA	-55~+85	26×18×13.8
UIYBCC2618A4P	8.0~12.0	Full	1.0	36	1.3	60	60	SMA	-55~+85	26×18×13.8
UIYBCC1920B	8.0~18.0	Full	0.8	14	1.5	60	60	SMA	-30~+70	19×20.3×14
UIYBCC1318B	12.0~18.0	Full	0.5	18	1.3	60	60	SMA	-55~+85	13×18×13.8
UIYBCC2618B	12.0~18.0	Full	1.0	36	1.3	60	60	SMA	-55~+85	26×18×13.8
UIYBCC2618B4P	12.0~18.0	Full	1.0	36	1.3	60	60	SMA	-55~+85	26×18×13.8
UIYBCC1325A	18.0~26.5	Full	1.6	14	1.6	10	10	SMA	-55~+85	13×25×16.6
UIYBCC1316A	26.5~40.0	Full	1.2	15	1.5	10	10	2.92mm	-55~+85	13×16×12.6

Drop in type from 56MHz to 14GHz

Model No. 型号	Freq. Range (MHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBDC6060E	56~86	Full	1.5	16	1.4	60	60	TAB	-10~+60	60×60×28
UIYBDC6060A	68~88	Full	1.3	18	1.3	100	100	TAB	-10~+65	60×60×28
UIYBDC6060B	88~108	Full	0.65	20	1.25	100	100	TAB	-20~+70	60×60×28
UIYBDC6060C	130~180	Full	0.8	18	1.3	100	100	TAB	-20~+70	60×60×28
UIYBDC6060D	136~174	Full	0.65	20	1.25	100	100	TAB	-20~+70	60×60×28
UIYBDC6060F	225~400	Full	0.8	18	1.3	160	160	TAB	0~+60	60×60×28
			1.0	16	1.4				-40~+85	
UIYBDC6060H	300~475	Full	0.8	18	1.3	100	100	TAB	25±5	60×60×28
			1.0	17	1.35				-40~+85	
UIYBDC3538A	380~460	Full	0.5	18	1.3	300	300	TAB	-30~+70	35×38×11
UIYBDC3538B	400~470	Full	0.5	20	1.25	300	300	TAB	-30~+70	35×38×11
UIYBDC3538C	600~800	Full	0.5	18	1.3	300	300	TAB	-30~+70	35×38×11
UIYBDC3232A	700~900	Full	0.5	20	1.2	250	250	TAB	-30~+70	32×32×11

Model No. 型号	Freq. Range (MHz) 频率范围	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBDC2525A	800~1000	Full	0.6	18	1.3	200	200	TAB	-30~+70	25.4 × 25.4 × 10.5
UIYBDC3538F	950~1415	Full	0.6	16	1.4	300	300	TAB	0~+70	35 × 38 × 13
UIYBDC2525B	960~1215	Full	0.5	20	1.25	200	200	TAB	-30~+70	25.4 × 25.4 × 10.5
UIYBDC3538E	1225~1875	Full	0.6	16	1.4	300	300	TAB	0~+70	35 × 38 × 13

Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBDC7272A	0.8~2.0	Full	1.3	12	1.6	300	300	TAB	+10~+70	72 × 72 × 27.4
UIYBDC6466A	1.0~2.0	Full	0.6	17	1.4	100	100	TAB	+10~+70	64 × 66 × 26
UIYBDC14272A	1.0~2.0	Full	1.4	33	1.4	300	300	TAB	+10~+70	142 × 72 × 27.4
UIYBDC14272A4P	1.0~2.0	Full	1.4	33	1.4	300	300	TAB	+10~+70	142 × 72 × 27.4
UIYBDC3538D	1.0~1.3	Full	0.4	20	1.25	300	300	TAB	-30~+70	35 × 38 × 11
UIYBDC5049A	1.35~2.7	Full	0.5	18	1.3	100	100	TAB	0~+70	50.8 × 49.5 × 19
UIYBDC10149A	1.35~2.7	Full	1.0	36	1.3	100	100	TAB	0~+70	101.6 × 49.5 × 19
UIYBDC10149A4P	1.35~2.7	Full	1.0	36	1.35	100	100	TAB	0~+70	101.6 × 49.5 × 19
UIYBDC5049B	1.5~3.0	Full	0.5	17	1.35	100	100	TAB	0~+70	50.8 × 49.5 × 19
UIYBDC10149B	1.5~3.0	Full	1.0	34	1.35	100	100	TAB	0~+70	101.6 × 49.5 × 19
UIYBDC10149B4P	1.5~3.0	Full	1.0	34	1.35	100	100	TAB	0~+70	101.6 × 49.5 × 19
UIYBDC4040A	1.7~3.5	Full	0.7	17	1.4	100	100	TAB	0~+70	40 × 40 × 20
UIYBDC2525C	1.8~2.0	Full	0.4	20	1.25	200	200	TAB	-30~+70	25.4 × 25.4 × 10.5
UIYBDC4040B	1.85~3.8	Full	0.7	17	1.35	100	100	TAB	0~+70	40 × 40 × 20
UIYBDC3234A	2.0~4.0	Full	0.6	17	1.35	100	100	TAB	+10~+70	32 × 34 × 21
UIYBDC6434A	2.0~4.0	Full	1.2	34	1.35	100	100	TAB	+10~+70	64 × 34 × 21
UIYBDC5972A	2.0~4.0	Full	0.6	16	1.4	500	500	TAB	+10~+60	59.4 × 72 × 50
UIYBDC3030A	2.0~6.0	Full	0.8	13	1.5	100	100	TAB	-40~+70	30.5 × 30.5 × 15
UIYBDC2528A	3.0~6.0	Full	0.5	18	1.3	100	100	TAB	-55~+85	25.4 × 28 × 14
UIYBDC5028A	3.0~6.0	Full	1.0	36	1.3	100	100	TAB	-55~+85	50.8 × 28 × 14
UIYBDC2528B	3.5~6.5	Full	0.5	18	1.3	100	100	TAB	-55~+85	25.4 × 28 × 14
UIYBDC5028B	3.5~6.5	Full	1.2	34	1.35	100	100	TAB	-55~+85	50.8 × 28 × 14
UIYBDC2122A	4.0~8.0	Full	0.5	18	1.3	100	100	TAB	-55~+85	21 × 22.5 × 15
UIYBDC4222A	4.0~8.0	Full	1.0	36	1.3	100	100	TAB	-55~+85	42 × 22.5 × 15
UIYBDC5654A	4.0~8.0	Full	0.6	16	1.4	300	300	TAB	-30~+70	56 × 54.3 × 36
UIYBDC1920A	6.0~18.0	Full	1.5	10	1.9	60	60	TAB	-30~+70	19 × 20.3 × 14
UIYBDC815A	8.0~12.0	Full	0.5	18	1.3	30	30	TAB	-55~+85	8.9 × 15 × 7.8
UIYBDC1716A	8.0~12.0	Full	1.0	36	1.3	30	30	TAB	-55~+85	17.6 × 16.5 × 7.5
UIYBDC1716A4P	8.0~12.0	Full	1.0	36	1.3	30	30	TAB	-55~+85	17.6 × 16.5 × 7.5
UIYBDC1920B	8.0~18.0	Full	0.8	14	1.5	60	60	TAB	-30~+70	19 × 20.3 × 14
UIYBDC815B	12.0~18.0	Full	0.6	18	1.35	30	30	TAB	-55~+85	8.9 × 15 × 7.8
UIYBDC1716B	12.0~18.0	Full	1.2	36	1.35	30	30	TAB	-55~+85	17.6 × 16.5 × 7.5
UIYBDC1716B4P	12.0~18.0	Full	1.2	36	1.35	30	30	TAB	-55~+85	17.6 × 16.5 × 7.5
UIYBDC1325A	18.0~26.5	Full	1.6	14	1.6	10	10	TAB	-55~+85	13 × 25 × 16.6
UIYBDC1316A	26.5~40.0	Full	1.2	15	1.5	10	10	TAB	-55~+85	13 × 16 × 12.6

Dual Junction Circulator 双节环行器

- Frequency range 10MHz to 40GHz, up to 500W power.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Coaxial type from 10MHz to 27.5GHz, FM, VHF, UHF, GSM, CDMA, WCDMA, LTE, L.S.C.X band, etc

Model No. 型号	Freq. Range (MHz) 频率范围	Ports 端口数	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Dimension LxWxH(mm) 外形尺寸
UIYCDC16080A	10~55	3 Port	20%	2.4	40	1.25	50	50	N, SMA	160 × 80 × 28
UIYCDC16080A4P	10~55	4 Port	20%	2.4	40	1.25	50	50	N, SMA	160 × 80 × 28
UIYCDC12060A	45~270	3 Port	40%	0.8	50	1.15	200	200	N, SMA	120 × 60 × 28
UIYCDC12060A4P	45~270	4 Port	40%	0.8	50	1.15	200	200	N, SMA	120 × 60 × 28
UIYCDC11256A	130~900	3 Port	40%	0.6	46	1.2	300	300	N, SMA	112 × 56 × 15
UIYCDC11256A4P	130~900	4 Port	40%	0.6	46	1.2	300	300	N, SMA	112 × 56 × 15
UIYCDC9648A	250~1000	3 Port	30%	0.6	50	1.15	400	400	N, SMA	96 × 48 × 24
UIYCDC9648A4P	250~1000	4 Port	30%	0.6	50	1.15	400	400	N, SMA	96 × 48 × 24
UIYCDC7038A	200~1875	3 Port	30%	0.4	60	1.15	300	300	N, SMA	70 × 38 × 15
UIYCDC7038A4P	200~1875	4 Port	30%	0.4	60	1.15	300	300	N, SMA	70 × 38 × 15
UIYCDC6834A	700~2000	3 Port	40%	0.6	45	1.2	200	200	N, SMA	68 × 34 × 22
UIYCDC6834A4P	700~2000	4 Port	40%	0.6	45	1.2	200	200	N, SMA	68 × 34 × 22
UIYCDC6432A	700~3500	3 Port	25%	0.6	50	1.15	200	200	N, SMA	64 × 32 × 18
UIYCDC6432A4P	700~3500	4 Port	25%	0.6	50	1.15	200	200	N, SMA	64 × 32 × 18
UIYCDC3928A	3500~7000	3 Port	20%	0.6	45	1.2	60	60	SMA	39 × 28 × 15
UIYCDC3928A4P	3500~7000	4 Port	20%	0.6	45	1.2	60	60	SMA	39 × 28 × 15
UIYCDC2618A	6000~27500	3 Port	20%	0.6	45	1.2	60	60	SMA, 2.92mm	26 × 18 × 12.7
UIYCDC2618A4P	6000~27500	4 Port	20%	0.6	45	1.2	60	60	SMA, 2.92mm	26 × 18 × 12.7
UIYBCC14272A	1000~2000	3 Port	Full	1.4	32	1.4	300	300	N, SMA	142 × 72 × 27.4
UIYBCC14272A4P	1000~2000	4 Port	Full	1.4	32	1.4	300	300	N, SMA	142 × 72 × 27.4
UIYBCC10149A	1350~2700	3 Port	Full	1.4	32	1.35	100	100	N, SMA	101.6 × 49.5 × 19
UIYBCC10149A4P	1350~2700	4 Port	Full	1.4	32	1.35	100	100	N, SMA	101.6 × 49.5 × 19
UIYBCC10149B	1500~3000	3 Port	Full	1.0	34	1.35	100	100	N, SMA	101.6 × 49.5 × 19
UIYBCC10149B4P	1500~3000	4 Port	Full	1.0	34	1.35	100	100	N, SMA	101.6 × 49.5 × 19
UIYBCC6434A	2000~4000	3 Port	Full	1.2	34	1.35	100	100	N, SMA	64 × 34 × 21
UIYBCC6434A4P	2000~4000	4 Port	Full	1.2	34	1.35	100	100	N, SMA	64 × 34 × 21
UIYBCC5028A	3000~6000	3 Port	Full	1.0	36	1.3	100	100	N, SMA	50.8 × 28 × 14
UIYBCC5028A4P	3000~6000	4 Port	Full	1.0	36	1.3	100	100	N, SMA	50.8 × 28 × 14
UIYBCC4222A	4000~8000	3 Port	Full	1.0	36	1.3	100	100	N, SMA	42 × 22.5 × 15
UIYBCC4222A4P	4000~8000	4 Port	Full	1.0	36	1.3	100	100	N, SMA	42 × 22.5 × 15
UIYBCC2618A	8000~12000	3 Port	Full	1.0	36	1.3	60	60	SMA	26 × 18 × 13.8
UIYBCC2618A4P	8000~12000	4 Port	Full	1.0	36	1.3	60	60	SMA	26 × 18 × 13.8
UIYBCC2618B	12000~18000	3 Port	Full	1.0	36	1.3	60	60	SMA	26 × 18 × 13.8
UIYBCC2618B4P	12000~18000	4 Port	Full	1.0	36	1.3	60	60	SMA	26 × 18 × 13.8

Drop in type from 10MHz to 20GHz, FM,VHF,UHF,GSM,CDMA,WCDMA,LTE,L.S.C.X band, etc

Model No. 型号	Freq. Range (MHz) 频率范围	Ports 端口数	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Dimension LxWxH(mm) 外形尺寸
UIYDDC16080A	10~55	3 Port	20%	2.4	40	1.25	50	50	TAB	160 × 80 × 28
UIYDDC16080A4P	10~55	4 Port	20%	2.4	40	1.25	50	50	TAB	160 × 80 × 28
UIYDDC12060A	45~270	3 Port	40%	0.8	50	1.15	200	100	TAB	120 × 60 × 28
UIYDDC12060A4P	45~270	4 Port	40%	0.8	50	1.15	200	100	TAB	120 × 60 × 28
UIYDDC11256A	130~900	3 Port	40%	0.6	46	1.2	300	300	TAB	112 × 56 × 15
UIYDDC11256A4P	130~900	4 Port	40%	0.6	46	1.2	300	300	TAB	112 × 56 × 15
UIYDDC5025A	200~3600	3 Port	30%	0.4	50	1.15	200	200	TAB	50.8 × 25.4 × 8.6
UIYDDC5025A4P	200~3600	4 Port	30%	0.4	50	1.15	200	200	TAB	50.8 × 25.4 × 8.6
UIYDDC5031A	200~3600	3 Port	30%	0.4	50	1.15	200	100	TAB	50.8 × 31.7 × 8.6
UIYDDC5031B	200~3600	3 Port	30%	0.4	50	1.15	200	100	TAB	50.8 × 31.7 × 8.6
UIYDDC7038A	200~1875	3 Port	30%	0.4	60	1.15	300	300	TAB	70 × 38 × 11
UIYDDC7038A4P	200~1875	4 Port	30%	0.4	60	1.15	300	300	TAB	70 × 38 × 11
UIYDDC3819A	600~5000	3 Port	30%	0.5	50	1.15	60	60	TAB	38 × 19 × 8.2
UIYDDC3819A4P	600~5000	4 Port	30%	0.5	50	1.15	60	60	TAB	38 × 19 × 8.2
UIYDDC2420A	4000~7000	3 Port	20%	0.6	45	1.2	60	60	TAB	24 × 20 × 8
UIYDDC2420A4P	4000~7000	4 Port	20%	0.6	45	1.2	60	60	TAB	24 × 20 × 8
UIYDDC1716A	5000~25000	3 Port	40%	0.6	46	1.2	60	60	TAB	17.6 × 16.5 × 7.5
UIYDDC1716A4P	5000~25000	4 Port	40%	0.6	46	1.2	60	60	TAB	17.6 × 16.5 × 7.5
UIYBDC14272A	1000~2000	3 Port	Full	1.4	32	1.4	300	300	TAB	142 × 72 × 27.4
UIYBDC14272A4P	1000~2000	4 Port	Full	1.4	32	1.4	300	300	TAB	142 × 72 × 27.4
UIYBDC10149A	1350~2700	3 Port	Full	1.4	32	1.35	200	200	TAB	101.6 × 49.5 × 19
UIYBDC10149A4P	1350~2700	4 Port	Full	1.4	32	1.35	200	200	TAB	101.6 × 49.5 × 19
UIYBDC10149B	1500~3000	3 Port	Full	1.0	34	1.35	200	200	TAB	101.6 × 49.5 × 19
UIYBDC10149B4P	1500~3000	4 Port	Full	1.0	34	1.35	200	200	TAB	101.6 × 49.5 × 19
UIYBDC6434A	2000~4000	3 Port	Full	1.2	34	1.35	100	100	TAB	64 × 34 × 21
UIYBDC6434A4P	2000~4000	4 Port	Full	1.2	34	1.35	100	100	TAB	64 × 34 × 21
UIYBDC5028A	3000~6000	3 Port	Full	1.0	36	1.3	100	100	TAB	50.8 × 28 × 14
UIYBDC5028A4P	3000~6000	4 Port	Full	1.0	36	1.3	100	100	TAB	50.8 × 28 × 14
UIYBDC4222A	4000~8000	3 Port	Full	1.0	36	1.3	100	100	TAB	42 × 22.5 × 15
UIYBDC4222A4P	4000~8000	4 Port	Full	1.0	36	1.3	100	100	TAB	42 × 22.5 × 15
UIYBDC1716A	8000~12000	3 Port	Full	1.0	36	1.3	30	30	TAB	17.6 × 16.5 × 7.5
UIYBDC1716A4P	8000~12000	4 Port	Full	1.0	36	1.3	30	30	TAB	17.6 × 16.5 × 7.5
UIYBDC1716B	12000~18000	3 Port	Full	1.2	36	1.35	30	30	TAB	17.6 × 16.5 × 7.5
UIYBDC1716B4P	12000~18000	4 Port	Full	1.2	36	1.35	30	30	TAB	17.6 × 16.5 × 7.5

Microstrip Circulator 微带环行器

- Frequency range 2.7 to 40GHz
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Single Junction Circulator

Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYMC1414A	2.7~4.9	40%	0.4	20	1.2	15	15	Microstrip	-55~+85	14 × 14 × 5.5
UIYMC1212A	4.0~5.85	30%	0.4	20	1.2	15	15	Microstrip	-55~+85	12 × 12 × 4
UIYMC1010A	5.0~7.5	20%	0.4	20	1.2	15	15	Microstrip	-55~+85	10 × 10 × 4
UIYMC77A	7.0~9.5	25%	0.5	20	1.25	15	15	Microstrip	-55~+85	7 × 7 × 3.5
UIYBMC66A	8.0~12.0	Full	0.6	16	1.35	10	10	Microstrip	-55~+85	6 × 6 × 2.5
UIYMC66A	8.0~18.0	45%	0.5	20	1.25	15	15	Microstrip	-55~+85	6 × 6 × 2.5
UIYBMC66B	11.0~18.0	Full	1.0	15	1.45	10	10	Microstrip	-55~+85	6 × 6 × 3
UIYMC55B	14.0~23.0	20%	0.5	20	1.25	10	10	Microstrip	-40~+85	5 × 5 × 3.5
UIYMC44A	24.0~40.0	15%	0.7	15	1.4	15	15	Microstrip	-55~+85	4 × 4 × 3
UIYMC44B	18.0~24.0	20%	0.6	17	1.35	2	2	Microstrip	-55~+85	4.5 × 4.5 × 3.5
UIYMC44C	22.0~32.0	25%	0.7	17	1.35	2	2	Microstrip	-55~+85	4.5 × 4.5 × 3.5
UIYMC33Y	32.0~38.0	Full	1.0	14	1.45	10	10	Microstrip	-55~+85	3.5 × 3.5 × 2.5

Dual Junction Circulator

Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDMC108A	8.0~12.0	20%	0.5	30	1.25	10	5	Microstrip	-55~+85	10 × 8 × 2.5
UIYDMC108B	8.0~12.0	20%	0.5	30	1.25	10	5	Microstrip	-55~+85	10 × 8 × 2.5
UIYDMC87A	14.0~18.0	25%	0.45	30	1.25	10	3	Microstrip	-55~+85	8 × 7 × 2.5
UIYDMC87B	14.0~18.0	25%	0.45	30	1.25	10	3	Microstrip	-55~+85	8 × 7 × 2.5

Dual Junction Circulator–Magnetic Shield

Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDMC109A	8.0~12.0	20%	0.45	30	1.25	10	5	Microstrip	-55~+85	10.4 × 9 × 4
UIYDMC109B	8.0~12.0	20%	0.45	30	1.25	10	5	Microstrip	-55~+85	10.4 × 9 × 4
UIYDMC87C	14.0~18.0	25%	0.45	30	1.25	10	3	Microstrip	-55~+85	8 × 7 × 4
UIYDMC87D	14.0~18.0	25%	0.45	30	1.25	10	3	Microstrip	-55~+85	8 × 7 × 4

Surface Mount Circulator 表面封装环行器

- Frequency range 200MHz to 15GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYSC25A	0.2~3.6	10%	0.2	25	1.15	100	100	SMT	-40~+85	Φ25.4 × 9
UIYSC36A	0.2~1.875	40%	0.2	30	1.15	200	200	SMT	-30~+70	Φ36 × 11
UIYSC20A	0.4~3.0	16%	0.25	25	1.15	60	60	SMT	-40~+85	Φ20.4 × 8.6
UIYSC15A	0.7~5.0	15%	0.3	23	1.2	60	60	SMT	-40~+85	Φ15.5 × 7
UIYSC12A	0.7~10.0	20%	0.3	23	1.2	30	30	SMT	-40~+90	Φ12.7 × 8
UIYSC7A	2.4~6.0	15%	0.35	20	1.22	15	15	SMT	-40~+105	Φ7 × 5.5
UIYSC10A	2.4~6.0	20%	0.3	21	1.2	30	30	SMT	-40~+85	Φ9.8 × 7
UIYSC9B	4.8~12.0	18%	0.4	20	1.25	30	30	SMT	-40~+85	Φ9 × 6.5

Waveguide Circulator 波导环行器

- Frequency range 2.4 to 110GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYWC6880A	5.4~8.0	20%	0.25	25	1.2	100	100	WR137(BJ70)	-40~+85	68.3 × 80 × 49.2
UIYWC6060A	7.0~10.0	20%	0.25	25	1.2	100	100	WR112(BJ84)	-40~+85	60 × 60 × 48
UIYWC4853B	8.0~12.0	Full	0.5	18	1.3	100	100	WR90(BJ100)	-40~+85	48 × 53 × 42
UIYWC4853A	8.0~12.4	30%	0.25	25	1.2	100	100	WR90(BJ100)	-40~+85	48 × 53 × 42
UIYWC4444A	10.0~15.0	20%	0.25	25	1.2	100	100	WR75(BJ120)	-40~+85	44.5 × 44.5 × 38.1
UIYWC3842A	12.0~18.0	Full	0.4	20	1.3	100	100	WR62(BJ140)	-40~+85	33.3 × 42 × 38
UIYWC3838A	12.4~18.0	20%	0.25	25	1.2	100	100	WR62(BJ140)	-40~+85	38 × 38 × 33
UIYWC2830A	18.0~26.5	Full	0.3	20	1.25	100	100	WR42(BJ220)	-40~+85	22.4 × 30 × 28
UIYWC3030A	19.2~31.0	Full	0.4	18	1.3	10	10	WR34(BJ260)	Room	30 × 30 × 22.4
UIYWC3030B	21.7~33.0	15%	0.3	20	1.2	60	60	WR34(BJ260)	-40~+70	30 × 30 × 22.4
UIYWC2230A	22.0~33.0	Full	0.4	18	1.3	60	60	WR34(BJ260)	-40~+70	30 × 30 × 22.4
UIYWC2225B	26.0~40.0	15%	0.3	20	1.2	80	80	WR28(BJ320)	-40~+85	25.5 × 25 × 25.9
UIYWC2225A	26.5~40.0	Full	0.45	16	1.4	25	25	WR28(BJ320)	-40~+85	25.5 × 25 × 25.9
UIYWC1027A	92.0~96.0	Full	0.8	18	1.35	2	2	WR15(BJ620)	-40~+60	10 × 27 × 14
UIYWC1924A	92.0~96.0	Full	1.2	14	1.6	2	2	WR15(BJ620)	-40~+60	19.1 × 24.8 × 19.1

Band Pass Filter 带通滤波器

- Up to 20GHz
- Military, space and commercial applications.
- Low insertion loss, high rejection, high power handling.
- Custom design available upon request.



Band Pass Filter—Low frequency from 50MHz to 9000MHz

Model No. 型号	Pass Band (MHz) 带通频率	IL. (dB) 损耗	VSWR 驻波比	Rejection 抑制	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBPF3020A	50~80 (BW 2.5MHz)	8.0	1.5	60dB @88~108MHz 40dB @Fc ± 6.5MHz	5	SMA	-40~+85	30 × 20 × 12
UIYBPF269288A	94~95	1.2	1.3	40dB @DC~88MHz 40dB @105 ~ 500MHz	10	N,SMA	-25~+60	269 × 288 × 120
UIYBPF4825A	130~700 (BW ~50MHz)	1.5	1.5	40dB @Fc ± 6.5MHz	30	BNC,N,SMA	-40~+85	48 × 25 × 20
UIYBPF250166A	136~200 (BW 2.5MHz)	2.0	1.3	60dB @88~108MHz 40dB @F0 ± 6.5MHz	100	N,SMA	-40~+85	250 × 166 × 54
UIYBPF237158A	137~167 (BW 10~27MHz)	1.0	1.3	45dB @Fc ± ~17MHz	20	N,SMA	-20~+55	237 × 185 × 100
UIYBPF6020A	149~165	2.0	1.3	60dB @88~108MHz 40dB @225~400MHz	10	N, SMA	-40~+85	60 × 20 × 20
UIYBPF338151A	153~162	2.0	1.5	40dB @146.5MHz 40dB @168.50MHz	100	N, SMA	-30~+70	338 × 151 × 48
UIYBPF225150A	195~225	0.3	1.22	55dB@DC~170MHz 55dB@250~1500MHz	100	N,SMA	-40~+85	225 × 150 × 85.5
UIYBPF4012A	200~400 (BW 10MHz)	3.0	1.5	20dB @Fo ± 25MHz	2	SMA	-40~+85	40.4 × 12 × 10
UIYBPF10673C	220	3.0	1.45	60dB @Fc ± 10MHz	100	N, SMA	-40~+85	106 × 73 × 65
UIYBPF7373A	220~230 (BW~0.7MHz)	3.5	1.3	60dB @Fo ± 10MHz 35dB @Fo ± 4.3MHz	50	N, SMA, BNC	-40~+85	73 × 73 × 50
UIYBPF6030A	225~400	1.5	1.5	40dB@DC-200 MHz 40dB@500~1000MHz	60	SMA	-30~+70	60 × 30 × 20
UIYBPF4825B	225~400	1.5	1.5	40dB@DC-200 MHz 40dB@500~1000MHz	30	SMA	-40~+85	48 × 25 × 16
UIYBPF220115A	240~320 (BW 30MHz)	1.0	1.3	100dB @Fo ± 40MHz	100	N, SMA	-30~+70	220 × 115 × 83
UIYBPF183124A	240~320 (BW 20~40MHz)	1.0	1.25	50dB @FC ± 25MHz	20	N, SMA	-40~+85	183 × 124 × 73
UIYBPF194126A	240~380	2.0	1.38	80dB@170~200MHz 80dB@420~500MHz 50dB@200~220MHz 50dB@400~420MHz 45dB @DC~170MHz	100	N, SMA	-40~+70	194 × 126 × 25
UIYBPF205205A	290~320	1.0	1.25	105dB @230~270MHz 105dB @340~380MHz 70dB @DC~230MHz 70dB @380~1650MHz	300	7/16, N	-40~+85	205 × 205 × 80
UIYBPF125125A	300~500 (BW~5MHz)	0.5	1.22	60dB @Fc ± 20MHz	100	N, SMA	-40~+85	125 × 125 × 64
UIYBPF220115B	360~380	1.0	1.3	100dB @DC~340MHz 100dB @400~2000MHz 80dB @2000~2500MHz	100	N, SMA	-40~+70	220 × 115 × 63
UIYBPF13587A	380~400 (BW~5MHz)	2.0	1.3	40dB @Fc ± 5MHz	50	N, SMA	-20~+60	135 × 87 × 68
UIYBPF21696A	380~420	0.7	1.3	45dB @DC~360MHz 45dB @440~1000MHz	100	N, SMA	-40~+85	216 × 96 × 42

Model No. 型号	Pass Band (MHz) 带通频率	IL (dB) 损耗	VSWR 驻波比	Rejection 抑制	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBPF9393A	380~500 (BW~8MHz)	2.0	1.3	40dB @Fo ± 8MHz 60dB @88~108MHz	100	N, SMA	-40~+85	93 × 93 × 64
UIYBPF10673B	390~470 (BW~7MHz)	2.0	1.3	60dB @88~108MHz 40dB @Fo ± 8.5MHz	80	N, SMA	-40~+85	106 × 73 × 65
UIYBPF100104A	400~438 (BW 3~4MHz)	1.0	1.25	50dB@Fc ± 20MHz	20	N, SMA	-40~+85	100 × 104 × 63
UIYBPF194100A	400~480	1.0	1.25	50dB @DC~375MHz 45dB @505~1500MHz	20	N, SMA	-40~+85	194 × 100 × 63
UIYBPF8383B	435~800 (BW 10MHz)	1.0	1.3	60dB@Fo ± 50MHz	100	N, SMA	-40~+85	83 × 83 × 58
UIYBPF180120A	450~650 (BW10~150MHz)	1.0	1.3	70dB @Fc ± 78MHz 50dB @Fc ± 24MHz	50	N, SMA	-40~+85	180 × 120 × 58
UIYBPF17584A	442~448	3.0	1.3	50dB @380~440MHz 50dB @450~500MHz	50	N, SMA	-40~+85	175 × 84 × 65
UIYBPF300170A	470~477	2.5	1.3	80dB @DC~460MHz 80dB @480~1000MHz	100	N, SMA	-30~+70	300 × 170 × 76
UIYBPF11579A	470~488	2.0	1.5	40dB @Fo ± 25MHz	100	N, SMA	-30~+70	115 × 79 × 64
UIYBPF100145A	491.4375~493.6125	5.0	1.3	40dB @488.4375~490.6125MHz	20	N, SMA	-10~+50	100 × 145 × 63
UIYBPF9191A	522~524	1.5	1.45	40dB @27~497MHz 40dB @551MHz 65dB @1000~2900MHz 85dB @3200~4000MHz	100	N, SMA	-40~+85	91 × 91 × 40
UIYBPF12183A	530~630	1.0	1.3	30dB @490MHz 30dB @670MHz	50	N, SMA, BNC	-40~+85	121 × 83 × 47
UIYBPF10673E	563~577	1.5	1.5	60dB @Fo ± 30MHz	50	N, SMA	-40~+85	106 × 73 × 58
UIYBPF7373B	600~800 (BW 10MHz)	2.0	1.5	20dB @Fo ± 25MHz	50	N, SMA	-40~+85	73 × 73 × 50
UIYBPF110110A	600~900 (BW 30MHz)	1.2	1.3	50dB @Fc ± ~30MHz	20	N, SMA, BNC	-40~+85	110 × 110 × 43
UIYBPF7979A	650~2700 (BW 10~70MHz)	0.5	1.2	85dB @2nd Harmonic 70dB @3rd Harmonic	50	N, SMA	-40~+85	79 × 79 × 44
UIYBPF13973A	650~750	0.7	1.4	35dB @Fc ± 40MHz	100	N, SMA	-40~+85	139 × 73 × 50
UIYBPF9393C	686~692	1.0	1.3	50dB @DC~670MHz 50dB @708~3000MHz	50	7/16, N, SMA	-20~+60	93 × 93 × 47
UIYBPF12060A	703~894 (BW ~45MHz)	1.5	1.3	20dB @Fc ± 5MHz 55dB @Fc ± 43MHz	100	N, SMA	-40~+85	120 × 60 × 43
UIYBPF10673F	713~748	1.5	1.5	50dB @650~702MHz	100	7/16, N, SMA	-40~+85	106 × 73 × 48
UIYBPF278136A	800~1000 (BW ~60MHz)	1.4~2.0	1.25	90dB @Fc ± 50MHz 50dB @Fc ± 30MHz 25dB @Fc ± 10MHz	100	N, SMA, 7/16	-20~+55	278 × 136 × 50
UIYBPF5454A	863~928 (BW ~13MHz)	1.0	1.22	55dB @Fc ± ~30MHz	30	N, SMA	-30~+70	54 × 54 × 45
UIYBPF6464A	863~928 (IP Grade: IP67)	1.0	1.22	55dB @Fc ± ~30MHz	30	N, SMA	-30~+70	64 × 64 × 43
UIYBPF24696A	870~880	2.0	1.3	100dB @885~960MHz	100	N, SMA	-20~+60	246 × 96 × 47
UIYBPF17384A	870~880	2.0	1.3	80dB @885~960MHz	100	N, SMA	-20~+60	173 × 84 × 47
UIYBPF10069A	885~889	3.0	1.5	70dB @925~960MHz 40dB @DC~880MHz	100	N, SMA	-40~+85	100 × 69 × 43
UIYBPF12365A	900~1100	2.0	1.5	30dB @800MHz 30dB @1200MHz	100	N, SMA	-40~+70	123 × 65 × 47
UIYBPF18782A	902.2~927.5	3.5	1.3	50dB@DC~900MHz 50dB@930~3000MHz	50	N, SMA	-20~+65	187 × 82 × 47
UIYBPF10668A	952.5~967.5	1.5	1.3	60dB @DC~935MHz 60dB @985~3000MHz	50	N, SMA	-40~+85	106 × 68 × 43
UIYBPF12082A	930~952 (BW 4MHz)	2.0	1.3	50dB @Fc ± 8MHz	100	N, SMA	-40~+85	120 × 82 × 43
UIYBPF5539A	940~960	1.5	1.3	30dB @1850~2100MHz	10	N, SMA	-40~+85	55 × 51 × 26

Model No. 型号	Pass Band (MHz) 带通频率	IL (dB) 损耗	VSWR 驻波比	Rejection 抑制	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBPF12073A	980~1260	0.8	1.3	20dB @DC~950MHz 20dB @1290~3000MHz	20	N, SMA	-40~+85	120 × 73 × 36
UIYBPF6565A	1000~1300 (BW 10MHz)	2.0	1.5	20dB @Fo ± 25MHz	50	N, SMA	-40~+85	65 × 65 × 37
UIYBPF16768A	1165~1585.65	1.0	1.35	60dB @1622.5~2000MHz 40dB @DC~1000MHz	50	N, SMA	-40~+85	167 × 68 × 47
UIYBPF10849A	1200~1500	0.5	1.5	80dB @DC~500MHz 80dB @2000~3000MHz 50dB @500~1000MHz 50dB @1670~2000MHz	25	N, SMA	-40~+70	108.2 × 49 × 20
UIYBPF8458A	1200~1800 (BW 50MHz)	1.0	1.3	20dB @Fo ± 65MHz	10	N, SMA	-40~+85	84 × 58 × 29.5
UIYBPF11963A	1215~1400	0.8	1.5	65dB @1035MHz 75dB @1570~4000MHz	100	N, SMA	-40~+85	119 × 63 × 36
UIYBPF11576A	1290~1340	0.5	1.22	60dB @DC~1250MHz 60dB @1380~2680MHz	100	N, SMA	-30~+70	115 × 76 × 43
UIYBPF5959A	1300~1700 (BW 2~10MHz)	1.5	1.35	40dB @Fo ± 25MHz	100	N, SMA	-40~+85	59 × 59 × 36
UIYBPF12080A	1350~1400	0.5	1.22	60dB @DC~1310MHz 60dB @1440~2400MHz	10	N, SMA	-40~+85	120 × 80 × 44
UIYBPF8366A	1350~1550	1.5	1.45	40dB @800MHz 40dB @1800MHz	100	N, SMA	-40~+85	83 × 66 × 14
UIYBPF10060A	1350~1785 (BW~160MHz)	0.8	1.4	60dB @Fc ± 107MHz 60dB @2nd&3rd Harmonic	100	N, SMA	-55~+85	100 × 60 × 38
UIYBPF7855A	1350~1785 (BW~160MHz)	3.0	1.5	40dB @Fc ± 107MHz	50	SMA	-55~+85	78 × 55 × 14
UIYBPF13068A	1380~1520	0.8	1.3	40dB @DC~1350MHz 40dB @1550~3000MHz	100	N, SMA	-40~+85	130 × 68 × 43
UIYBPF10673G	1400~2500 (BW 50MHz)	0.75	1.3	50dB @Fo ± 65MHz	10	N, SMA	-40~+70	106 × 73 × 31
UIYBPF8383A	1430~1470 (BW 2MHz)	1.5	1.35	35dB @F0 ± 10MHz	10	N, SMA	-40~+85	83 × 83 × 36
UIYBPF8550A	1500~3200 (BW 60~4000MHz)	0.6	1.22	60dB @Fc~40MHz	20	N, SMA	-40~+85	85 × 50 × 30
UIYBPF7075A	1556~1577	0.7	1.22	50dB @DC~1000MHz 55dB @1625~1660MHz	50	N, SMA	-55~+85	70 × 75 × 43
UIYBPF5030A	1556~1577	1.0	1.4	50dB @DC~1000MHz 55dB @1625~1660MHz	50	N, SMA	-55~+85	50 × 30 × 30
UIYBPF8570A	1610~1676	1.2	1.35	40dBc@DC~1000MHz 40dBc@1559~1592MHz 70dBc@1166~1278MHz 70dBc@2480~2502MHz 50dBc@3253~3319MHz 50dBc@4896~4962MHz 50dBc@6539~6605MHz 50dBc@8182~8248MHz 50dBc@9825~9891MHz 50dBc@11468~11534MHz	30	MCX, N, SMA	-45~+85	85 × 70 × 25
UIYBPF80115A	1616~1627	2.5	1.3	35dB @DC~1610MHz 35dB @1630~3000MHz	30	N, SMA	-20~+60	80 × 115 × 43
UIYBPF125125B	1618.25~1626.5	3.5	1.3	40dB @DC~1616.375MHz 40dB @1628.375~3000MHz	20	N, SMA	-20~+65	125 × 125 × 43
UIYBPF6038A	1700~2600	1.0	1.5	40dB@1300MHz&3000MHz 60dB@1000MHz&4000MHz	50	SMA	-40~+85	60 × 38 × 14
UIYBPF12565A	1700~2700 (BW~70MHz)	1.2	1.3	50dB @Fc ± ~100MHz	20	N, SMA, BNC	-40~+85	125 × 65 × 38
UIYBPF8257A	1710~1780	1.5	1.5	40dB @1805~1880MHz	30	N, SMA	-40~+85	82 × 57 × 35
UIYBPF9062A	1710~1910 (BW~105MHz)	0.8	1.5	60dB @Fc ± 35MHz	30	N, SMA	-40~+85	90 × 62 × 35
UIYBPF9090A	1710~1980 (BW~75MHz)	1.5	1.3	70dB @Fc ± 20MHz	20	N, SMA	-40~+85	90 × 90 × 39
UIYBPF12028A	1800~2300 (BW 400MHz)	0.3	1.3	80dB @Fc ± 800MHz 65dB @Fc ± 400MHz	20	N, SMA	-40~+85	120 × 28 × 24
UIYBPF12565B	1900~2070	1.0	1.3	40dB @DC~1870MHz 40dB @2100~4000MHz	50	N, SMA	-20~+50	125 × 65 × 43

Model No. 型号	Pass Band (MHz) 带通频率	IL. (dB) 损耗	VSWR 驻波比	Rejection 抑制	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBPF12555A	1920~1980	1.2	1.3	60dB @DC~1900MHz 60dB @2000~3000MHz 50dB @3000~6000MHz IMD3:-150dBc@2 × 43dBm	100	N, SMA	-10~+55	125 × 55 × 39
UIYBPF14560A	1985~2295	1.8	1.3	50dB @DC~1955MHz 30dB @1955~1970MHz 30dB @2120~2135MHz 50dB @2135~4000MHz	20	N, SMA	-30~+70	145 × 60 × 32
UIYBPF11620A	2000~2400 (BW~200MHz)	0.6	1.5	40dB @Fc ± 200MHz	20	N, SMA	-55~+85	116 × 20 × 35
UIYBPF6232A	2000~4000	1.0	1.5	60dB @DC~1100MHz 60dB @4900~7000MHz	2	SMA	-40~+85	62 × 32 × 13
UIYBPF7522A	2000~7000	1.5	1.8	45dB @DC~1.0GHz 45dB @8.0~14.0GHz	10	SMA	-40~+70	75 × 55 × 11
UIYBPF7070A	2090~2190	0.6	1.3	30dB@DC~1980MHz 30dB@2300~3000MHz	100	N,SMA	-40~+85	70 × 70 × 43
UIYBPF12428A	2200~2280	1.0	1.5	35dB @2120MHz 35dB @2360MHz	100	N, SMA	-30~+70	124 × 28 × 40
UIYBPF9565A	2200~2300	1.0	1.3	40dB @DC~2130MHz 40dB @2370~4000MHz	50	N, SMA	-20~+50	95 × 65 × 43
UIYBPF12565C	2290~2365	0.75	1.3	50dB@DC~2240MHz 50dB@2400~4000MHz	50	N, SMA	-40~+70	125 × 65 × 34
UIYBPF9149A	2300~2900	1.0	1.25	35dB @2160MHz 35dB @3050MHz	100	N, SMA	-40~+85	91 × 49 × 32
UIYBPF8663A	2340~2370	1.0	1.3	70dB@DC~2300MHz 70dB@2410~3000MHz	50	N, SMA	-30~+70	86 × 63 × 38
UIYBPF8858A	2400~2485	1.5	1.45	45dB @DC~2350MHz 45dB @2540~5000MHz	50	N, SMA	-55~+85	88 × 58 × 28
UIYBPF7250A	2400~2500	2.0	1.5	30dB @2300MHz 30dB @2600MHz	100	N, SMA	-40~+70	72 × 50 × 27
UIYBPF15265A	2402~2484	1.5	1.5	80dB @DC~2382MHz 80dB @2504~5000MHz	100	N, SMA	-40~+85	152 × 65 × 28
UIYBPF5353A	2495~2505	2.5	1.45	60dB @DC~ 2000MHz 60dB @3000~7000MHz	50	N, SMA	-40~+85	53 × 53 × 24
UIYBPF11890A	2496~2690	1.5	1.3	70dB @DC~ 2476MHz 70dB @2710~5000MHz	20	N, SMA	-40~+85	118 × 90 × 39
UIYBPF15565A	2545~2655	1.5	1.3	60dB @DC~ 2525MHz 60dB @2675~6000MHz	20	N, SMA	-20~+50	155 × 65 × 34
UIYBPF12021A	2700~3100	1.3	1.2	50dB @DC~2600MHz 50dB @3200~6000MHz	5	SMA	-30~+70	120 × 21 × 23
UIYBPF4430A	3000~5000	1.5	1.5	60dB @Fc ± 1500MHz	10	SMA	-40~+85	44 × 30 × 12.5
UIYBPF12553A	3000~5000 (BW~600MHz)	1.2	1.3	50dB @Fc ± ~200MHz	20	N, SMA, BNC	-40~+85	125 × 53 × 33
UIYBPF6032A	3000~10000	1.5	1.8	50dB@DC~1.5GHz 50dB@11.5~17.0GHz	10	SMA	-40~+70	60 × 32 × 11
UIYBPF4314A	3300~3900	1.0	1.45	30dB @DC~2.6GHz 16dB @4.4~6.0GHz 40dB @6.0~9.9GHz	10	SMA	-40~+105	43 × 41 × 22
UIYBPF4025A	3300~5000	1.0	1.5	45dB @6600~10000MHz 45dB @DC~2000MHz	50	SMA	-40~+85	40 × 25 × 11
UIYBPF8648A	3400~3700	1.0	1.4	50dB @2500~2690MHz 50dB @4420~4960MHz	20	SMA	-20~+60	86 × 48 × 32
UIYBPF13065A	3420~3510	2.0	1.45	60dB @DC~3410MHz 60dB @3520~4000MHz 50dB @4000~6000MHz IMD3:-150dBc@2 × 43dBm	100	N, SMA	-25~+75	130 × 65 × 39
UIYBPF6023A	3800~4000	1.5	1.5	40dB @DC~3650MHz 40dB @4150~8000MHz	30	SMA	-40~+85	60 × 23 × 10
UIYBPF6535A	4000~7000 (BW~150MHz)	3.0	1.5	30dB @Fc ± 50MHz	10	SMA	-40~+85	65 × 35 × 16

Model No. 型号	Pass Band (MHZ) 带通频率	IL. (dB) 损耗	VSWR 驻波比	Rejection 抑制	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBPF5026A	4340~4460	3 ± 1	1.5	90dB @2788MHz 60dB @806MHz&3594MHz 50dB @2620.8MHz&4567MHz 30dB @2928MHz&3524MHz 30dB @3095.2MHz&3664MHz 30dB @4092.8MHz&4260MHz	10	SMA	-40~+85	50 × 26 × 16.5
UIYBPF6922A	4500~8500	1.5	1.8	30dB @DC~4000MHz 30dB @9000MHz	10	SMA	-40~+85	69 × 22 × 12
UIYBPF6143A	4900~5100	2.0	1.5	30dB @4700MHz 30dB @5300MHz	60	SMA	-40~+70	61 × 43 × 17
UIYBPF12026A	5000~6500	0.8	1.6	60dB @DC~4.6GHz 60dB @6.9~10GHz	10	SMA	-40~+85	120 × 26 × 16
UIYBPF9550A	5100~5900	0.5	1.4	40dB @DC~4450MHz 60dB @6200~8000MHz	75	SMA	-40~+85	95 × 50 × 28
UIYBPF15065A	5140~5280	0.75	1.3	70dB @DC~5090MHz 70dB @5330~5900MHz	20	SMA, N	-20~+60	150 × 65 × 29
UIYBPF6016A	5170~5330	1.8	1.3	50dB @DC~4950MHz 50dB @5520~13000MHz	10	SMA	-20~+60	60 × 16 × 15
UIYBPF9016A	5400~5900	1.0	1.5	50dB @DC~5150MHz 50dB @6150~10000MHz	10	SMA	-30~+70	90 × 16 × 14
UIYBPF7022A	5670~5885	2.0	1.5	50dB@DC~5500MHz 40dB @6000~6050MHz 50dB @6050~13000MHz	10	SMA	-40~+85	70 × 22 × 10
UIYBPF7250B	5700~5850	0.5	1.3	30dB @DC~5500MHz 30dB @6000~10000MHz	20	SMA, N	-40~+70	72 × 50 × 28
UIYBPF4922A	6000~8000	1.5	1.5	60dB @Fc ± 1000MHz	10	SMA	-40~+85	49 × 22 × 10.5
UIYBPF5817A	6000~10000	1.5	1.8	50dB@DC~5.0GHz 50dB@11.0~16.0GHz	10	SMA	-40~+70	58 × 17.6 × 10.6
UIYBPF4721A	6500~7500	1.5	1.8	30dB @DC~6000MHz 30dB @8000MHz	10	SMA	-40~+85	47 × 21 × 8
UIYBPF15547A	7000~9000 (BW 10MHz)	3.0	1.25	6dB @Fo ± 10MHz 16dB @Fo ± 15MHz	50	WR112, N-F	-40~+85	155 × 47.8 × 47.8
UIYBPF5620B	7000~9000	1.5	1.8	30dB @DC~6500MHz 30dB @9500MHz	10	SMA	-40~+85	56 × 20 × 8
UIYBPF3020B	7170~7270	2.5	1.3	55dB @DC~6500MHz 55dB @7900~9000MHz	2	SMA	-40~+85	30 × 20 × 20
UIYBPF10016A	7812~8612	2.5	1.43	40dB @DC~7612MHz 40dB @8812~18000MHz	5	SMA	-30~+70	100 × 16 × 12
UIYBPF4015A	7970~8900	2.0	1.4	60dB @DC~7240MHz 40dB @8500~18000MHz	5	SMA, TAB	-40~+85	40 × 15 × 10

Band Pass Filter– 8.0GHz to 40.0GHz

Model No. 型号	Pass Band (Ghz) 带通频率	IL. (dB) 损耗	VSWR 驻波比	Rejection 抑制	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBPF8526A	8.0~12.0	2.0	1.35	20dB@DC~7.5GHz 20dB@12.5~20GHz	10	SMA	-40~+85	85 × 26 × 14
UIYBPF6417A	8.0~12.0	1.5	1.8	60dB@DC~7.0GHz 60dB@13.0~18.0GHz	10	SMA	-40~+70	64.4 × 17 × 9
UIYBPF8015A	8.0~18.0	2.0	2.0	50dB@DC~7.0GHz 50dB@19.5~23.0GHz	10	SMA	-40~+70	80.4 × 15.5 × 12
UIYBPF5815A	8.075~8.475	2.0	1.4	60dB@DC~7240MHz 40dB@8800~18000MHz	5	SMA, TAB	-40~+85	58 × 15 × 10
UIYBPF8418A	8.2~9.3	1.5	1.5	30dB@8000MHz 30dB@9500MHz	10	SMA	-40~+85	84 × 18 × 9

Model No. 型号	Pass Band (GHZ) 带通频率	IL. (dB) 损耗	VSWR 驻波比	Rejection 抑制	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBPF8844A	8.28~8.5	1.0	1.4	70dB @7700MHz & 8100MHz 70dB @8700MHz & 9100MHz	50	SMA	-40~+70	88 × 44 × 16.5
UIYBPF6016C	8.5~9.5	0.5	1.3	35dB @DC~7.5GHz 35dB @10.5~18.0GHz 30dB @7.5~8.0GHz 30dB @10.0~10.5GHz	5	SMA	-30~+70	60 × 16 × 12
UIYBPF4213A	8.5~13.5	1.5	1.8	45dB@DC~5.5GH 45dB@16.5~19.0GHz	10	SMA	-40~+70	42.6 × 13 × 10
UIYBPF7419A	9.0~15.0	2.0	1.8	40dB@DC~8.3GHz 40dB@15.7~18.0GHz 25dB@8.3~8.5GHz 25dB@15.5~15.7GHz	2	SMA	-30~+70	74 × 19 × 8
UIYBPF5717A	9.0~15.0	1.5	1.8	60dB@DC~7.5GHz 60dB@17.0~22.0GHz	10	SMA	-40~+70	57.8 × 17 × 10
UIYBPF5035A	9.1~9.76 (BW ~200MHz)	0.7	1.45	70dB @Fo ± 300MHz	10	SMA	-40~+85	50 × 35 × 13.5
UIYBPF7817A	9.5~13.0	2.0	1.8	30dB @9000MHz 30dB @13500MHz	10	SMA	-40~+85	78 × 17 × 9
UIYBPF4012B	9.663~10.083	2.0	1.5	60dB @4500~8673MHz 60dB @11073~18000MHz	5	SMA	-40~+85	40 × 12 × 12
UIYBPF5313A	9.7~9.9	1.8	1.5	50dB @DC~9400MHz 50dB @10200~18000MHz	20	TAB, SMA	-40~+85	53 × 13 × 10
UIYBPF4815B	10.0~18.0	1.5	2.0	45dB@DC~7.0GHz 45dB@21.0~24.0GHz	10	SMA	-40~+70	48.2 × 15 × 11
UIYBPF6214A	10.0~20.0	2.0	2.0	50dB@DC~8.5GHz 50dB@22.0~25.0GHz	10	SMA	-40~+70	62.6 × 14.8 × 9.2
UIYBPF4517A	11.0~13.0	1.5	1.5	90dB @DC~6GHz 50dB @15~20GHz	20	SMA	-40~+85	45.4 × 17 × 9
UIYBPF7016A	12.0~18.0 (BW ~500MHz)	1.0	1.22	90dB @Fc ± 95MHz	5	SMA	-30~+70	70 × 16 × 12
UIYBPF7418A	12.0~18.0	1.5	1.7	60dB @DC~11.0GHz 60dB @19.0~22.0GHz	5	SMA	-30~+70	74 × 18 × 7
UIYBPF11033A	12.95~13.05	1.5	1.3	60dB @Fc ± 200MHz	10	WR62	-40~+85	110 × 33.3 × 33.3
UIYBPF7615A	13.5~17.5	2.5	1.8	50dB@DC~13.0GHz 50dB@18.0~23.0GHz	10	SMA	-40~+70	76.5 × 15 × 8
UIYBPF8717A	13.7~14.55	1.5	1.5	30dB @14700MHz 80dB @12800MHz	10	SMA	-40~+85	87 × 17 × 9
UIYBPF6817A	13.75~14.5	3.0	1.8	30dB @10000~13600MHz 30dB @14650~20000MHz	5	SMA, TAB	-40~+85	68 × 17 × 7.8
UIYBPF6916A	15.0~18.0	2.0	1.8	40dB@DC~14.5GHz 40dB@18.5~25.0GHz	10	SMA	-40~+70	69.1 × 16 × 7.6
UIYBPF4515A	15.0~19.0	2.0	1.8	70dB@DC~12.0GHz 70dB@22.0~26.0GHz	10	SMA	-40~+70	45.8 × 15 × 7.5
UIYBPF4814A	15.0~20.0	1.5	1.8	70dB@DC~12.0GHz 70dB@23.0~26.0GHz	10	2.92mm	-40~+70	48.8 × 14.5 × 7.6
UIYBPF9033A	15.25~15.75	0.8	1.3	30dB @Fc ± 750MHz	10	WR62	-40~+85	90 × 33.3 × 33.3
UIYBPF6016B	15.925~16.075	2.0	1.3	30dB @DC~15750MHz 30dB @16250~25000MHz	10	SMA	-20~+60	60 × 16 × 11
UIYBPF4214A	16.0~20.0	1.5	1.8	70dB@DC~12.0GHz 70dB@24.0~30.0GHz	10	2.92mm	-40~+70	42.8 × 14 × 7.5
UIYBPF3414A	17.0~20.0	1.5	1.8	55dB@DC~13.0GHz 55dB@24.0~36.0GHz	10	2.92mm	-40~+70	34.4 × 14 × 7
UIYBPF11022A	17.475~17.525	3.0	1.45	30dB @Fc ± 50MHz	10	SMA	-40~+85	110 × 22 × 11

Model No. 型号	Pass Band (GHZ) 带通频率	IL. (dB) 损耗	VSWR 驻波比	Rejection 抑制	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBPF3714A	18.0 ~ 23.0	2.0	1.8	60dB@DC~14.0GHz 60dB@27.0~40.0GHz	10	2.92mm	-40~+70	37.9 × 14 × 7
UIYBPF4514A	18.0 ~ 32.0	2.0	2.0	40dB@DC~15.8GHz 40dB@35.3~40.0GHz	10	2.92mm	-40~+70	45.5 × 14 × 9
UIYBPF4714A	19.0 ~ 24.0	2.0	1.8	65dB@DC~16.0GHz 65dB@27.0~40.0GHz	10	2.92mm	-40~+70	47.3 × 14 × 7.2
UIYBPF3314A	20.0 ~ 24.0	2.0	1.8	55dB@DC~15.0GHz 55dB@29.0~38.0GHz	10	2.92mm	-40~+70	33.3 × 14 × 7
UIYBPF3514A	20.0 ~ 25.0	2.0	1.8	60dB@DC~15.0GHz 60dB@30.0~37.5GHz	10	2.92mm	-40~+70	35 × 14 × 7
UIYBPF3514B	23.0 ~ 28.0	2.0	1.8	70dB@DC~16.5GHz 70dB@34.5~40.0GHz	10	2.92mm	-40~+70	35.7 × 14 × 7
UIYBPF3414B	24.0 ~ 28.0	2.0	1.8	50dB@DC~19.0GHz 50dB@35.0~40.0GHz	10	2.92mm	-40~+70	34.9 × 14 × 7
UIYBPF3514C	24.0 ~ 29.0	2.0	1.8	50dB@DC~19.0GHz 50dB@35.0~40.0GHz	10	2.92mm	-40~+70	35.9 × 14 × 7
UIYBPF3213A	24.0 ~ 30.0	2.0	1.8	55dB@DC~18.0GHz 55dB@36.0~40.0GHz	10	2.92mm	-40~+70	32.2 × 13 × 6.8
UIYBPF3213B	28.0 ~ 34.0	2.0	1.8	55dB@DC~22.0GHz 55dB@40.0GHz	10	2.92mm	-40~+70	32.1 × 13 × 6.6
UIYBPF3013A	29.0 ~ 34.0	2.0	1.8	50dB@DC~23.0GHz 50dB@40.0GHz	10	2.92mm	-40~+70	30.2 × 13 × 6.6
UIYBPF3513A	30.0 ~ 33.0	2.0	1.8	55dB@DC~25.0GHz 55dB@38.0~40.0GHz	10	2.92mm	-40~+70	35 × 13 × 6.6
UIYBPF3714B	32.0 ~ 36.0	2.5	1.8	60dB@DC~28.0GHz 60dB@40.0GHz	10	2.92mm	-40~+70	37 × 14 × 6.5
UIYBPF4814B	33.0 ~ 37.0	3.0	2.0	30dB@DC~32.0GHz 30dB@38.0~40.0GHz	10	2.92mm	-40~+70	48.3 × 14 × 6.4

Low Pass Filter 低通滤波器

- Frequency range up to 20GHz .
- Military, space and commercial applications.
- Low insertion loss, high rejection, high power handling.
- Custom design available upon request.



Model No. 型号	Pass Band (MHz) 带通频率	IL. (dB) 损耗	VSWR 驻波比	Rejection 抑制	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYLPF3512A	DC~108	2.0	1.5	40dB @150~2000MHz	10	SMA	-40~+85	35 × 12 × 8
UIYLPF9080A	DC-170	0.5	1.3	45dB @850MHz	100	N, SMA	-40~+85	90 × 80 × 22
UIYLPF16054A	5~95	1.5	1.4	45dB@105~500MHz	10	SMA,N	-25~+55	160 × 54 × 20
UIYLPF4012A	5~285	2.0	1.5	45dB @330~650MHz	5	SMA	-40~+85	40.4 × 12 × 10
UIYLPF4825A	DC-400	1.0	1.5	20dB @500~1000MHz	40	SMA	-40~+85	48 × 25 × 16
UIYLPF18026A	DC-490	0.5	1.3	45dB @850MHz	100	N, SMA	-40~+85	180 × 26 × 20
	DC-500	1.5	1.5	40dB @700~2000MHz	50	N, SMA	-20~+55	
	DC-1500	1.5	1.5	40dB @1700~3000MHz	50	N, SMA	-20~+55	
UIYLPF9080A	850-865	0.5	1.3	45dB @1710~2560MHz 30dB @2560~4500MHz	100	N, SMA	-10~+70	90 × 80 × 22
UIYLPF4520A	DC-894	1.5	1.5	70dB @1760~2668MHz	5	SMA	-40~+85	45 × 20 × 12
UIYLPF8863A	DC-900	1.2	1.8	50dB @1.2~2.0GHz	30	SMA	-40~+85	88.5 × 63 × 12
UIYLPF19048A	DC-1000	1.5	1.5	50dB @1.4~1.9GHz	30	SMA	-40~+85	190 × 48 × 12
UIYLPF15830A	DC-1000	0.55	1.5	40dB @2000~3000MHz	100	SMA, N	-40~+85	158 × 30 × 24
UIYLPF6420A	DC-1800	0.2	1.5	20dB @3220~3253MHz 25dB @4830~4879.5MHz 30dB @6440~6506MHz	10	SMA	-40~+85	64 × 20 × 16
UIYLPF5038A	DC-2000	1.0	1.8	50dB @2.3~2.4GHz	30	SMA	-40~+85	50 × 38 × 12
UIYLPF17227A	DC-2170	1.5	1.5	40dB @2.4~2.5GHz	100	N, SMA	-40~+85	172 × 27.6 × 21.6
UIYLPF9426A	DC-2200	0.55	1.5	40dB @4400~6000MHz	100	N, SMA	-40~+85	94 × 26 × 21
UIYLPF16525A	DC-2250	1.0	1.8	40dB @2580~8000MHz	100	SMA, N	-30~+70	165.5 × 25 × 20
UIYLPF4630A	DC-2300	1.0	1.8	40dB @2700~6000MHz	10	SMA	-40~+85	46 × 30 × 12
UIYLPF8132A	DC-2600	1.5	1.8	30dB @3100~15000MHz	10	SMA	-40~+85	81 × 32 × 12
UIYLPF8032A	DC-2850	1.5	1.8	45dB @3.2~18.0GHz	5	SMA	-40~+85	80 × 32 × 12
UIYLPF4832A	DC-3000	1.0	1.8	50dB @3.5~6.0GHz	30	SMA	-40~+85	48 × 32 × 12
UIYLPF9923A	DC-3600	1.0	1.8	45dB @4.3~8.0GHz	100	SMA, N	-30~+70	99.5 × 23 × 18
UIYLPF4125A	DC-4000	1.0	1.8	50dB @4.7~8.0GHz	30	SMA	-40~+85	41 × 25 × 12
UIYLPF3325A	DC-5000	1.0	1.8	50dB @5.8~10.0GHz 20dB @5.4~5.8GHz 25dB @10.0~13GHz	30	SMA	-40~+85	33 × 25 × 12
UIYLPF3322A	DC-7000	1.0	1.8	50dB @8.1~14.0GHz	30	SMA	-40~+85	33 × 22 × 12
UIYLPF3022A	DC-8000	1.0	1.8	50dB @9.3~15.0GHz	30	SMA	-40~+85	30 × 22 × 12
UIYLPF2522A	DC-9000	1.0	2.0	50dB @12.0~16.0GHz	30	SMA	-40~+85	25 × 22 × 12
UIYLPF2522B	DC-10000	1.0	2.0	50dB @12.0~16.0GHz	30	SMA	-40~+85	25 × 22 × 12
UIYLPF2419A	DC-12000	1.0	2.0	50dB @14.0~20.0GHz	15	SMA	-40~+85	24 × 19 × 10
UIYLPF2319A	DC-13000	1.0	2.0	50dB @15.0~17.0GHz	30	SMA	-40~+85	23 × 19 × 12

High Pass Filter 高通滤波器

- Up to 20GHz
- Military, space and commercial applications.
- Low insertion loss, high rejection, high power handling.
- Custom design available upon request.



Model No. 型号	Pass Band (GHz) 带通频率	IL. (dB) 损耗	VSWR 驻波比	Rejection 抑制	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYHPF3934A	0.118~0.16	0.9	1.3	25dB @88~108MHz	5	BNC, SMA, N	-40~+85	39 × 34 × 20
UIYHPF3525A	0.17~0.5	1.0	1.5	20dB@DC~150MHz	10	BNC, N, SMA	-40~+85	35 × 25 × 20
UIYHPF7191A	0.8~4.0	1.2	1.8	60dB @DC~600MHz	50	N, SMA	-30~+70	71 × 91 × 22
UIYHPF7043A	1.0~4.0	1.2	1.8	50dB @DC~800MHz	30	SMA	-40~+85	70.5 × 43 × 12
UIYHPF5548A	1.5~10.0	1.5	2.0	60dB @DC~1050MHz	10	SMA	-40~+85	55 × 48 × 12
UIYHPF3734A	2.0~6.0	1.5	2.0	45dB @DC~1654MHz	30	SMA, N	-40~+85	37 × 34 × 20
UIYHPF3733A	2.0~12.0	1.0	1.8	50dB @DC~1.6GHz	30	SMA	-40~+85	37 × 33 × 12
UIYHPF4022A	2.0~13.0	1.5	1.8	40dB @DC~934MHz	30	SMA	-40~+85	40 × 22 × 11
UIYHPF3818A	2.0~18.0	1.5	2.0	50dB @DC~1.1GHz	10	SMA	-40~+70	38 × 18 × 11
UIYHPF3430A	2.39~12.75	1.0	1.8	40dB @DC~1900MHz	10	SMA	-40~+85	34 × 30 × 12
UIYHPF3433A	3.0~12.0	1.0	1.8	50dB @DC~2.5GHz	30	SMA	-40~+85	34 × 33 × 12
UIYHPF3228A	3.0~18.0	1.5	1.8	50dB @DC~2.5GHz	10	SMA	-40~+85	32 × 28 × 11
UIYHPF5033A	3.5~9.0	1.0	1.7	40dB @DC~2.5GHz	10	SMA	-40~+85	50 × 33 × 11
UIYHPF3025B	3.8~18.0	1.5	2.0	50dB @0.5~2.9GHz	5	SMA	-40~+85	30 × 25 × 11
UIYHPF3025A	4.0~18.0	1.5	2.0	50dB @DC~2.7GHz	30	SMA	-40~+85	30 × 25 × 11
UIYHPF3426A	5.5~16.0	1.2	2.0	50dB @DC~4.2GHz	30	SMA	-40~+85	34 × 26 × 12
UIYHPF2822A	7.0~18.0	1.2	2.0	50dB @DC~5.9GHz	30	SMA	-40~+85	28 × 22 × 12
UIYHPF2723A	8.0~18.0	1.2	2.0	50dB @DC~6.8GHz	30	SMA	-40~+85	27 × 23 × 12
UIYHPF2825A	10.0~18.0	1.2	2.0	50dB @DC~8.5GHz	30	SMA	-40~+85	28 × 25 × 12

Band Stop Filter 带阻滤波器

- Band Reject Frequency 460 to 3800MHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Band Reject Frequency (MHz) 带阻频率	Pass Band Frequency 通带频率	Band Reject Rejection Min(dB) 带阻抑制	VSWR 驻波比	IL. (dB) 损耗	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYBSF323111A	440~452	DC~420MHz 457~1000MHz	35	1.5	1.0	50	SMA, N	-30~+70	323 × 111 × 58.5
UIYBSF4012A	460~520	DC~402MHz 578~2000MHz	65	1.8	2.5	2	SMA	-55~+85	40.4 × 12 × 10
UIYBSF11060A	462.425	450~456.275MHz 462.8675~467MHz	20	1.45	1.5	50	SMA, N	-40~+80	110 × 60 × 63
UIYBSF3525A	616~638	50~576MHz 678~800MHz	40	1.8	2.5	5	SMA, N	-55~+85	35 × 25 × 20
UIYBSF280140A	791~821	DC~700MHz 832~2000MHz	40	1.7	1.5	100	SMA, N	-20~+55	280 × 140 × 48
UIYBSF25581A	824~849	DC~785MHz 885~1249MHz	40	2.0	1.5	50	SMA	-55~+85	255 × 81 × 53
UIYBSF25588A	832~837	DC~822MHz 847~1500MHz	40	2.0	1.5	50	SMA	-55~+85	255 × 88 × 53
UIYBSF15867A	868~870	DC~821MHz 925~1200MHz	50	1.3	0.5	50	SMA, N	-30~+70	158 × 67 × 43
UIYBSF247100A	870~880	DC~860MHz 885~2500MHz	40	2.0	2.0	100	N, SMA	-20~+65	247 × 100 × 50
UIYBSF29567A	930~965	DC~900MHz 995~2200MHz	40	2.0	1.5	50	SMA	-55~+85	295 × 67 × 43
UIYBSF165111A	1020~1100	DC~920MHz 1200~2100MHz	45	2.0	1.5	5	SMA	-40~+85	165 × 111 × 51
UIYBSF202152A	1025~1035	500~930MHz 1100~3000MHz	40	2.0	2.0	100	SMA	-40~+85	202.2 × 152.4 × 41.9
UIYBSF16168A	1258~1278	DC~1208MHz 1328~3000MHz	45	2.0	1.5	50	SMA	-55~+85	161 × 68 × 16
UIYBSF14768A	1557~1615	DC~1450MHz 1730~3000MHz	45	2.0	1.5	50	SMA	-55~+85	147 × 68 × 16
UIYBSF20960A	1700~1900	DC~1550MHz 2050~4500MHz	40	2.0	1.5	50	SMA, N	-55~+85	209 × 60 × 26
UIYBSF31170A	1800~3800 (BW 30~2000)	Fc ± ~30MHz	50	2.0	3.0	50	SMA, N	-20~+65	311.6 × 70.5 × 26
UIYBSF12970A	1897~1903	DC~1885MHz 1915~3000MHz	40	2.0	1.5	50	SMA	-55~+85	129 × 70 × 18
UIYBSF17957A	2100~2180	DC~2050MHz 2230~5000MHz	40	2.0	1.5	50	SMA, N	-55~+85	179 × 57 × 21
UIYBSF12069A	2320~2370	DC~2200MHz 2490~6000MHz	40	2.0	1.5	50	SMA	-55~+85	120 × 69 × 16
UIYBSF12255A	2400~2483	DC~2300MHz 2583~5000MHz	40	2.0	1.5	50	SMA	-55~+85	122 × 55 × 13
UIYBSF11968A	2487~2497	DC~2455MHz 2530~3000MHz	45	2.0	1.5	50	SMA	-55~+85	119 × 68 × 16
UIYBSF12070A	2592~2598	DC~2580MHz 2610~3000MHz	40	2.0	1.5	50	SMA	-55~+85	120 × 70 × 18
UIYBSF17235A	3600~3800	DC~3350MHz 4050~7000MHz	50	2.0	1.5	50	SMA	-55~+85	172 × 35 × 16

Coaxial Termination 同轴终端 (负载)

- Frequency range DC–26.5GHz, up to 2000W power.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range 频率范围	Power(W) 功率	Connector Type 连接形式	VSWR 驻波比	Impedance(Ω) 阻抗匹配
UIYCT2AS3	DC–3GHz	2	SMA	1.07	50
UIYCT2AS6	DC–6GHz			1.1	
UIYCT2AS8	DC–8GHz			1.15	
UIYCT2AS124	DC–12.4GHz			1.2	
UIYCT2AS18	DC–18GHz			1.3	
UIYCT2AS265	DC–26.5GHz			1.35	
UIYCT2AN3	DC–3GHz	2	N	1.15	50
UIYCT2AN6	DC–6GHz			1.25	
UIYCT2AN124	DC–12.4GHz			1.25	
UIYCT2AN18	DC–18GHz			1.25	
UIYCT2AB3	DC–3GHz	2	BNC	1.2	50
UIYCT2AB6	DC–6GHz			1.25	
UIYCT5AS3	DC–3GHz	5	SMA	1.15	50
UIYCT5AS6	DC–6GHz			1.25	
UIYCT5AS124	DC–12.4GHz			1.15	
UIYCT5AS18	DC–18GHz			1.3	
UIYCT5AS265	DC–26.5GHz			1.3	
UIYCT5AN3	DC–3GHz	5	N	1.15	50
UIYCT5AN6	DC–6GHz			1.25	
UIYCT5AN124	DC–12.4GHz			1.25	
UIYCT5AN18	DC–18GHz			1.35	
UIYCT10AS3	DC–3GHz	10	SMA	1.15	50
UIYCT10AS6	DC–6GHz			1.25	
UIYCT10AS124	DC–12.4GHz			1.2	
UIYCT10AS18	DC–18GHz			1.3	
UIYCT10AS265	DC–26.5GHz			1.35	
UIYCT10AN3	DC–3GHz	10	N	1.15	50
UIYCT10AN6	DC–6GHz			1.25	
UIYCT10AN8	DC–8GHz			1.25	
UIYCT10AN124	DC–12.4GHz			1.3	
UIYCT10AN18	DC–18GHz			1.35	
UIYCT25AS8	DC–8GHz	25	SMA	1.25	50
UIYCT25AS124	DC–12.4GHz			1.3	
UIYCT25AS18	DC–18GHz			1.35	
UIYCT25AN3	DC–3GHz	25	N	1.15	50
UIYCT25AN6	DC–6GHz			1.25	

Model No. 型号	Freq. Range 频率范围	Power(W) 功率	Connector Type 连接形式	VSWR 驻波比	Impedance(Ω) 阻抗匹配
UIYCT25AN8	DC-8GHz	25	N	1.25	50
UIYCT25AN124	DC-12.4GHz			1.3	
UIYCT25AN18	DC-18GHz			1.35	
UIYCT30AS3	DC-3GHz	30	SMA	1.15	50
UIYCT30AS6	DC-6GHz			1.25	
UIYCT30AS124	DC-12.4GHz			1.3	
UIYCT30AS18	DC-18GHz			1.35	
UIYCT30AN3	DC-3GHz	30	N	1.15	50
UIYCT30AN6	DC-6GHz			1.25	
UIYCT50AS3	DC-3GHz	50	SMA	1.15	50
UIYCT50AS6	DC-6GHz			1.25	
UIYCT50AS124	DC-12.4GHz			1.3	
UIYCT50AS18	DC-18GHz			1.35	
UIYCT50AN3	DC-3GHz	50	N	1.15	50
UIYCT50AN6	DC-6GHz			1.25	
UIYCT50AN124	DC-12.4GHz			1.3	
UIYCT50AN18	DC-18GHz			1.35	
UIYCT80AN3	DC-3GHz	80	N	1.15	50
UIYCT80AN6	DC-6GHz			1.25	
UIYCT100AN3	DC-3GHz	100	N	1.15	50
UIYCT100AN6	DC-6GHz			1.25	
UIYCT100AN124	DC-12.4GHz			1.3	
UIYCT100AN18	DC-18GHz			1.4	
UIYCT150AN3	DC-3GHz	150	N	1.15	50
UIYCT150AN6	DC-6GHz			1.25	
UIYCT200AN3	DC-3GHz	200	N	1.15	50
UIYCT200AN6	DC-6GHz			1.25	
UIYCT200AN8	DC-8GHz			1.25	
UIYCT200AN124	DC-12.4GHz			1.35	
UIYCT200AN18	DC-18GHz			1.45	
UIYCT300AN3	DC-3GHz	300	N, 7/16	1.2	50
UIYCT300AN6	DC-6GHz			1.3	
UIYCT300AN8	DC-8GHz			1.25	
UIYCT300AN124	DC-12.4GHz			1.35	
UIYCT300AN18	DC-18GHz			1.45	
UIYCT500AN3	DC-3GHz	500	N, 7/16	1.2	50
UIYCT500AN6	DC-6GHz			1.35	
UIYCT500AN8	DC-8GHz			1.25	
UIYCT500AN124	DC-12.4GHz			1.35	
UIYCT500AN18	DC-18GHz			1.45	
UIYCT1000A	DC-3GHz	1000	7/16	1.2	50
UIYCT1500A	DC-3GHz	1500	7/16	1.25	50
UIYCT2000A	DC-3GHz	2000	7/16	1.3	50

Coaxial Attenuator 同轴衰减器

- Frequency range DC–26.5GHz, up to 2000W power.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range 频率范围	Power(W) 功率	Connector Type 连接形式	Attenuation Value(dB) 衰减值	VSWR 驻波比	Attenuation Tolerance(dB) 衰减精度		
						1~9	10~19	20~more
UIYCA2AS3	DC-3GHz	2	SMA	1~60dB	1.15	± 0.5	± 0.6	± 0.8
UIYCA2AS6	DC-6GHz				1.2	± 0.5	± 0.6	± 0.8
UIYCA2AS8	DC-8GHz				1.2	± 0.5	± 0.6	± 0.8
UIYCA2AS124	DC-12.4GHz				1.25	± 1.0	± 1.0	± 1.8
UIYCA2AS18	DC-18GHz				1.35	± 0.8	± 1.0	± 1.5
UIYCA2AN3	DC-3GHz	2	N	1~60dB	1.2	± 0.5	± 0.5	± 0.6
UIYCA2AN6	DC-6GHz				1.25	± 0.5	± 0.6	± 0.8
UIYCA2AN8	DC-8GHz				1.3	± 0.5	± 0.6	± 0.8
UIYCA2AN124	DC-12.4GHz				1.3	± 0.5	± 0.8	± 0.8
UIYCA2AN18	DC-18GHz				1.3	± 1.0	± 1.2	± 1.2
UIYCA2AB3	DC-3GHz	2	BNC	1~40dB	1.2	± 0.5	± 0.6	± 1.0
UIYCA2AB6	DC-6GHz				1.5	± 0.7	± 0.8	± 1.5
UIYCA5AS3	DC-3GHz	5	SMA	1~30dB	1.2	± 0.5	± 0.5	± 0.6
UIYCA5AS6	DC-6GHz				1.3	± 0.6	± 0.8	± 1.5
UIYCA5AS8	DC-8GHz				1.2	± 0.6	± 0.6	± 1.0
UIYCA5AS124	DC-12.4GHz				1.25	± 0.6	± 0.6	± 1.0
UIYCA5AS18	DC-18GHz				1.3	± 0.6	± 0.6	± 1.0
UIYCA5AN3	DC-3GHz	5	N	1~30dB	1.2	± 0.5	± 0.5	± 0.6
UIYCA5AN6	DC-6GHz				1.3	± 0.6	± 0.8	± 1.5
UIYCA5AN8	DC-8GHz				1.3	± 0.6	± 0.8	± 1.0
UIYCA5AN124	DC-12.4GHz				1.25	± 0.7	± 0.7	± 0.7
UIYCA5AN18	DC-18GHz				1.3	± 1.0	± 1.2	± 1.2
UIYCA10AS3	DC-3GHz	10	SMA	1~40dB	1.2	± 0.5	± 0.5	± 0.6
UIYCA10AS6	DC-6GHz				1.3	± 0.6	± 0.8	± 1.5
UIYCA10AS8	DC-8GHz				1.3	± 0.6	± 0.8	± 0.8
UIYCA10AS124	DC-12.4GHz				1.3	± 0.6	± 0.8	± 1.0
UIYCA10AS18	DC-18GHz				1.3	± 0.6	± 0.8	± 1.0
UIYCA10AS265	DC-26.5GHz				1.35	± 1.5	± 2.0	± 2.0
UIYCA10AN3	DC-3GHz	10	N	1~30dB	1.2	± 0.5	± 0.5	± 0.6
UIYCA10AN6	DC-6GHz				1.3	± 0.6	± 0.8	± 1.5
UIYCA10AN8	DC-8GHz				1.3	± 0.6	± 0.8	± 0.8
UIYCA10AN124	DC-12.4GHz				1.3	± 0.6	± 0.8	± 1.0
UIYCA10AN18	DC-18GHz				1.35	± 0.8	± 0.8	± 1.0
UIYCA25AS3	DC-3GHz				1.2	± 0.5	± 0.6	± 0.8
UIYCA25AS5	DC-5GHz				1.3	± 0.6	± 0.8	± 1.5

Model No. 型号	Freq.Range 频率范围	Power(W) 功率	Connector Type 连接形式	Attenuation Value(dB) 衰减值	VSWR 驻波比	Attenuation Tolerance(dB) 衰减精度		
						1~9	10~19	20~more
UIYCA25AS8	DC-8GHz	25	SMA	1~40dB	1.3	±0.8	±1.0	±1.2
UIYCA25AS124	DC-12.4GHz				1.4	±0.8	±1.0	±1.5
UIYCA25AS18	DC-18GHz				1.4	±1.0	±1.0	±1.5
UIYCA25AN3	DC-3GHz	25	N	1~30dB	1.2	±0.5	±0.6	±0.8
UIYCA25AN6	DC-6GHz				1.3	±0.6	±0.8	±1.5
UIYCA25AN8	DC-8GHz				1.3	±0.8	±1.0	±1.2
UIYCA25AN124	DC-12.4GHz				1.4	±0.8	±1.0	±1.5
UIYCA25AN18	DC-18GHz				1.4	±1.0	±1.0	±1.5
UIYCA30AS3	DC-3GHz	30	SMA	1~40dB	1.2	±0.5	±0.6	±0.8
UIYCA30AS5	DC-5GHz				1.3	±0.6	±0.8	±1.5
UIYCA30AN3	DC-3GHz	30	N	1~40dB	1.2	±0.5	±0.6	±0.8
UIYCA30AN6	DC-6GHz				1.3	±0.6	±0.8	±1.5
UIYCA50AS124	DC-12.4GHz	50	SMA	1~40dB	1.3	±1.5	±1.3	±1.3
UIYCA50AS18	DC-18GHz				1.35	±1.5	±1.3	±1.3
UIYCA50AN3	DC-3GHz	50	N	1~60dB	1.2	±0.5	±0.6	±0.8
UIYCA50AN6	DC-6GHz				1.3	±0.6	±0.8	±1.5
UIYCA50AN8	DC-8GHz				1.3	±1.0	±1.0	±1.2
UIYCA50AN124	DC-12.4GHz				1.35	±1.2	±1.2	±1.2
UIYCA50AN18	DC-18GHz				1.35	-1.5/+2.5	±1.8	±1.2
UIYCA100AN3	DC-3GHz	100	N	1~60dB	1.2	±0.5	±0.6	±0.8
UIYCA100AN6	DC-6GHz				1.3	±0.6	±0.8	±1.5
UIYCA100AN8	DC-8GHz				1.25	±0.8	±1.0	±1.5
UIYCA100AN124	DC-12.4GHz				1.35	±0.8	±1.0	±1.5
UIYCA100AN18	DC-18GHz				1.4	±0.8	±1.0	±1.5
UIYCA150AN3	DC-3GHz	150	N	1~60dB	1.2	±0.6	±0.8	±1.0
UIYCA150AN6	DC-6GHz				1.3	±0.6	±0.8	±1.5
UIYCA200AN3	DC-3GHz	200	N	1~60dB	1.2	±0.6	±0.8	±1.0
UIYCA200AN6	DC-6GHz				1.3	±0.6	±0.8	±1.5
UIYCA200AN8	DC-8GHz				1.25		±0.8	±0.9
UIYCA200AN124	DC-12.4GHz				1.35		±0.9	±1.1
UIYCA200AN18	DC-18GHz				1.45		±2.5	±1.3
UIYCA300AN3	DC-3GHz	300	N, 7/16	5~60dB	1.2	±0.6	±0.8	±1.0
UIYCA300AN6	DC-6GHz				1.35	±0.8	±0.8	±1.5
UIYCA300AN8	DC-8GHz				1.25		±0.8	±0.9
UIYCA300AN124	DC-12.4GHz				1.35		±0.9	±1.1
UIYCA300AN18	DC-18GHz				1.45		±3.5	±1.3
UIYCA500A	DC-3GHz	500	N, 7/16	10~60dB	1.2		±1.0	±1.2
UIYCA500AN6	DC-6GHz	500	N	10~60dB	1.3		±2.0	±1.1
UIYCA500AN8	DC-8GHz				1.3		±2.0	±1.1
UIYCA500AN124	DC-12.4GHz				1.35		±2.0	±1.2
UIYCA500AN18	DC-18GHz				1.5		±5.0	±1.5
UIYCA1000A	DC-3GHz	1000	7/16, N	10~60dB	1.3	±1.5	±2.0	±2.5
UIYCA1500A	DC-3GHz	1500	7/16, N	10~60dB	1.35	±1.5	±2.0	±2.5
UIYCA2000A	DC-3GHz	2000	7/16	10~60dB	1.35	±2.8	±2.8	±2.0
UIYCA2000C	DC-4.2GHz	2000	7/16, N	40dB	1.4			±2.0

2 Way Power Divider 2路功分器

- Frequency range 87MHz to 40GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (GHz) 频率范围	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR Input 输入 驻波比	VSWR Output 输出 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIY2PD158122A	0.07~0.52	0.7	20	1.3	1.3	50	2	N, SMA	20~+70	158 × 122 × 24
UIY2PD8269A	0.087~0.108	0.5	18	1.3	1.3	30	1	N, SMA	-55~+85	82 × 69 × 18
UIY2PD9477A	0.136~0.52	0.5	18	1.3	1.3	50	2	N, SMA	-40~+85	94.5 × 77 × 23.5
UIY2PD116108A	0.136~0.96	0.6	22	1.25	1.25	50	2	N, SMA	-40~+85	116.5 × 108.1 × 21
UIY2PD4273A	0.35~6.0	1.8	16	1.5	1.5	25	1	SMA	-55~+85	42 × 73.5 × 11.5
UIY2PD6645A	0.4~0.8	0.4	20	1.3	1.3	30	1	BNC	-55~+85	66 × 45 × 18
UIY2PD5055A	0.4~4.0	1.5	18	1.4	1.4	10	1	SMA, N	-55~+85	50.5 × 55.5 × 20
UIY2PD2854A	0.5~2.0	0.5	20	1.3	1.2	30	3	SMA	-55~+85	28 × 54 × 10
UIY2PD26157A	0.5~18.0	1.2	16	1.6	1.5	20	1	SMA	-55~+85	26 × 157 × 10
UIY2PD48157A	0.5~18.0	1.5	16	1.6	1.5	20	1	N	-55~+85	48 × 157 × 20
UIY2PD8860A	0.698~2.7 0.8~2.5	0.5	20	1.25	1.25	50	2	SMA, N, BNC	-40~+85	88 × 60 × 21
UIY2PD2835A	0.8~2.5	0.5	20	1.3	1.2	30	3	SMA	-55~+85	28 × 35 × 10
UIY2PD4036A	0.8~4.2	0.7	20	1.4	1.3	30	3	SMA	-55~+85	40 × 36 × 20
UIY2PD2828A	1.0~2.0	0.4	20	1.3	1.2	30	3	SMA	-55~+85	28 × 28 × 10
UIY2PD2828B	1.0~4.0	0.5	20	1.3	1.3	30	3	SMA	-55~+85	28 × 28 × 10
UIY2PD2828C	2.0~4.0	0.4	20	1.3	1.3	30	3	SMA	-55~+85	28 × 28 × 10
UIY2PD3033A	2.0~8.0	0.7	20	1.3	1.3	30	3	SMA, N	-55~+85	30 × 33 × 20
UIY2PD2828D	2.0~8.0	0.7	20	1.3	1.3	30	3	SMA	-55~+85	28 × 28 × 10
UIY2PD2447A	2.0~18.0	1.2	15	1.8	1.6	30	3	SMA	-55~+85	24 × 47 × 10
UIY2PD2828F	4.0~6.0	0.4	20	1.2	1.2	30	3	SMA	-55~+85	28 × 28 × 10
UIY2PD2828E	4.0~8.0	0.5	20	1.3	1.3	30	3	SMA	-55~+85	28 × 28 × 10
UIY2PD2436A	4.0~18.0	0.8	16	1.8	1.6	30	3	SMA	-55~+85	24 × 36 × 10
UIY2PD3728A	5.0~6.0	0.6	18	1.4	1.3	10	3	SMA	-55~+85	37 × 28 × 14
UIY2PD2619A	18.0~40.0	1.5	15	1.7	1.6	10	1	2.92mm	-40~+80	26 × 19 × 10

3 Way Power Divider 3路功分器

- Frequency range 87MHz to 40GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (GHz) 频率范围	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR Input 输入 驻波比	VSWR Output 输出 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIY3PD12071B	0.136~0.52	0.5	18	1.4	1.4	50	2	N,SMA	-40~+85	120 × 71 × 21
UIY3PD122158A	0.136~0.96	0.9	18	1.3	1.3	50	2	N,SMA	-40~+85	122 × 158 × 21
UIY3PD11244A	0.4~4.0	1.8	18	1.4	1.4	10	3	SMA	-40~+85	112 × 44 × 10
UIY3PD12071A	0.698~2.7 0.8~2.5	0.5	19	1.3	1.3	50	2	SMA,N	-40~+85	120 × 71 × 21
UIY3PD4152A	2.0~4.0	0.6	18	1.3	1.3	30	3	SMA	-55~+85	41 × 52 × 10
UIY3PD3766A	2.0~8.0	1.0	18	1.4	1.3	30	3	SMA	-55~+85	37.5 × 66.5 × 10
UIY3PD3944A	4.0~8.0	0.7	18	1.4	1.3	30	3	SMA	-55~+85	39 × 44 × 10

4 Way Power Divider 4路功分器

- Frequency range 87MHz to 40GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (GHz) 频率范围	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR Input 输入 驻波比	VSWR Output 输出 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIY4PD160128A	0.136~0.48	0.6	18	1.5	1.4	20	3	SMA, BNC	-30~+70	160 × 128 × 16.5
UIY4PD136119A	0.136~0.52	0.6	18	1.35	1.35	50	2	N, SMA	-40~+85	136.4 × 119 × 23
UIY4PD220162A	0.136~0.96	1.0	20	1.3	1.3	50	2	N, SMA	-40~+85	220 × 162 × 21
UIY4PD9976A	0.4~4.0	2.5	18	1.4	1.4	10	3	SMA	-35~+65	74.5 × 99.5 × 15.5
UIY4PD13555A	0.4~8.0	2.0	18	1.5	1.5	10	3	SMA	-55~+85	55 × 135 × 10
UIY4PD8562A	0.5~2.0	1.0	20	1.25	1.25	30	3	SMA	-55~+85	85 × 62 × 11
UIY4PD10172A	0.5~6.0	2.5	18	1.5	1.5	10	3	SMA	-35~+65	72.5 × 101 × 15.5
UIY4PD12071A	0.698~2.7 0.8~2.5	0.5	18	1.3	1.3	50	2	SMA, N	-40~+85	120 × 71 × 21
UIY4PD5650A	0.8~2.5	0.7	20	1.4	1.3	30	3	SMA	-55~+85	56 × 50 × 10
UIY4PD5643A	1.0~2.0	0.7	20	1.3	1.3	30	3	SMA	-55~+85	56 × 43 × 10
UIY4PD5643B	1.0~4.0	0.8	20	1.3	1.3	30	3	SMA	-55~+85	56 × 43 × 10
UIY4PD5643C	2.0~4.0	0.5	20	1.3	1.3	30	3	SMA	-55~+85	56 × 43 × 10
UIY4PD9452A	2.0~8.0	1.2	20	1.4	1.3	30	3	SMA, N	-55~+85	94 × 52 × 18
UIY4PD5650B	2.0~8.0	1.2	20	1.4	1.3	30	3	SMA	-55~+85	56 × 50 × 10
UIY4PD5458A	2.0~18.0	2.5	15	1.7	1.7	30	3	SMA	-55~+85	54 × 58 × 10
UIY4PD5643D	4.0~8.0	0.8	20	1.3	1.3	30	3	SMA	-55~+85	56 × 43 × 10
UIY4PD5060A	4.0~18.0	2.2	15	1.8	1.6	30	3	SMA	-55~+85	50.5 × 60 × 10
UIY4PD5045A	13.0~15.0	0.9	18	1.5	1.5	30	3	SMA	-55~+85	50.5 × 45 × 10
UIY4PD5230A	18.0~40.0	1.8	15	1.9	1.6	10	1	2.92mm	-40~+80	52 × 30 × 10

8 Way Power Divider 8路功分器

- Frequency range 87MHz to 40GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (GHz) 频率范围	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR Input 输入 驻波比	VSWR Output 输出 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIY8PD245174A	0.136~0.48	0.8	18	1.5	1.4	20	3	SMA, BNC	-30~+70	245.5 × 174 × 16.5
UIY8PD260159A	0.136~0.52	1.1	18	1.35	1.35	50	2	SMA, N	-40~+85	260 × 159 × 21
UIY8PD260159B	0.136~0.96	1.1	18	1.35	1.35	50	2	SMA, N	-40~+85	260 × 159 × 21
UIY8PD144103B	0.35~4.0	4.5	18	1.5	1.4	10	3	SMA	-35~+65	144.5 × 103.5 × 15.5
UIY8PD144103A	0.4~4.0	4.5	18	1.5	1.4	10	3	SMA	-35~+65	144.5 × 103.5 × 15.5
UIY8PD10880A	0.5~2.0	1.5	20	1.4	1.2	30	3	SMA	-55~+85	108 × 80 × 10
UIY8PD110140A	0.5~6.0	2.8	18	1.5	1.5	30	3	SMA	-40~+85	110 × 140 × 10
UIY8PD199106A	0.698~2.7 0.8~2.5 0.8~2.7	1.2	16	1.35	1.35	50	2	SMA, N	-40~+85	199 × 106.2 × 21.5
UIY8PD10875A	0.8~2.5	1.3	20	1.4	1.3	30	3	SMA	-55~+85	108 × 75 × 10
UIY8PD10863A	1.0~2.0	1.0	20	1.3	1.3	30	3	SMA	-55~+85	108 × 63 × 10
UIY8PD10863B	1.0~4.0	1.5	20	1.4	1.3	30	3	SMA	-55~+85	108 × 63 × 10
UIY8PD10863C	2.0~4.0	0.8	20	1.3	1.3	30	3	SMA	-55~+85	108 × 63 × 10
UIY8PD10863D	2.0~8.0	1.8	18	1.4	1.3	30	3	SMA	-55~+85	108 × 63 × 10
UIY8PD10863E	4.0~8.0	1.2	18	1.5	1.4	30	3	SMA	-55~+85	108 × 63 × 10
UIY8PD10162A	4.0~18.0	1.8	15	2.0	1.8	30	3	SMA	-55~+85	101.5 × 62 × 10
UIY8PD11348A	5.0~6.0	1.0	18	1.4	1.3	10	2	SMA	-55~+85	113 × 48 × 14

16 Way Power Divider 16路功分器

- Frequency range 87MHz to 40GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (MHz) 频率范围	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Forward Power(W) 通过功率	Reverse Power(W) 反射功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIY16PD218170A	400~4000	3.0	16	1.6	10	3	SMA-F	-55~+85	218 × 170 × 10
UIY16PD217105A	500~2400	2.3	18	1.5	10	3	SMA-F	-55~+85	217 × 105 × 11
UIY16PD22393A	700~3000	2.5	18	1.5	40	3	SMA-F	-55~+85	223 × 93 × 12
UIY16PD21759A	5000~6000	1.2	18	1.3	10	1	SMA-F	-55~+85	217 × 59 × 14

Duplexer 双工器

- Up to 20GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (MHz) 频率范围		IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDX7191A	TX	30~520	0.8	45	1.45	50	N, SMA	-30~+70	71 × 91 × 22
	RX	698~2700							
UIYDX4053A	TX	45.5~69.0	3.0	15	1.5	2	BNC, N, SMA	-30~+70	40 × 53 × 20
	RX	80.0~103.3							
UIYDX4073A	60~800MHz TX->RX >30MHz		0.5	80	1.25	100	N, SMA	-30~+70	140 × 73 × 33
UIYDX95115A	TX	136~174	0.8	70	1.45	100	N, SMA	-40~+70	95 × 115 × 25
	RX	400~470							
UIYDX4450A	TX	136~174	1.0	70	1.5	5	N, SMA	-40~+70	44 × 50 × 22
	RX	400~470							
UIYDX320420A	TX	145~158	1.0	80	1.3	100	N, SMA	-40~+85	320 × 420 × 100
	RX	168~180							
UIYDX310219A	140~170MHz TX->RX 5MHz		1.5	80	1.3	100	N, SMA	-30~+70	310 × 219 × 156
UIYDX482192A	148~174MHz TX->RX 4.6MHz		1.8	80	1.3	100	N, SMA	-30~+65	482.6 × 192 × 177.6
UIYDX148310A	TX	151.06~154.125	1.0	65	1.35	50	N, SMA	-20~+65	148 × 310 × 156
	RX	158.765~160.09							
UIYDX260190A	TX	340~380	1.0	80	1.3	10	N, SMA	-40~+75	260 × 190 × 65
	RX	240~270							
UIYDX340210A	TX	292~318	0.5	95	1.3	400	7/16, N	-25~+55	340 × 210 × 82
	RX	244~270							
UIYDX275200A	TX	300~320	0.5	75	1.3	400	7/16, N	-25~+55	275 × 200 × 85
	RX	360~380							
UIYDX102200A	TX	344~351	1.0	50	1.3	10	N, SMA	-40~+85	102 × 200 × 65
	RX	381~396							
UIYDX245165A	TX	361~366	2.0	80	1.3	80	N, SMA	-30~+60	245 × 165 × 85
	RX	351~356							
UIYDX330114A	TX	380~386.6	1.5	60	1.3	200	7/16, N	-40~+85	330 × 114 × 79
	RX	390~396.6							
UIYDX136179A	TX	380~385 380~395	2.0	65	1.4	100	N, SMA	-40~+70	136 × 179 × 68
	RX	390~395 417~429							
UIYDX19383A	TX	380~395	1.5	70	1.4	100	N, SMA	-30~+70	193 × 83 × 68
	RX	450~470							
UIYDX218165A	400~470MHz TX->RX 5MHz		1.5	80	1.3	100	N, SMA	-30~+70	218 × 165 × 64

Model No. 型号	Freq. Range (MHz) 频率范围		IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDX150176A	TX	426~430	1.5	70	1.3	20	N, SMA	-20~+60	150 × 176 × 75
	RX	412~416							
UIYDX155118A	TX	436.5~443.5	2.0	65	1.3	100	N, SMA	-30~+70	155 × 118 × 65
	RX	450~453							
UIYDX290120A	TX	449~452	1.0	65	1.3	50	N, SMA	-40~+85	290 × 120 × 49
	RX	470~485							
UIYDX140110A	TX	450~530	0.5	80	1.25	100	N, SMA	-55~+70	110 × 140 × 49
	RX	1420~1520							
UIYDX166125A	TX	455~470	1.0	80	1.3	100	N, SMA	-20~+60	166 × 125 × 67
	RX	405~419							
UIYDX290100A	TX	467~470	2.5	75	1.3	80	N, SMA	-30~+60	290 × 100 × 75
	RX	461~464							
UIYDX181297A	TX	491.4375~493.6125	5.0	75	1.3	50	N, SMA	-10~+50	181 × 297 × 80
	RX	488.4375~490.6125							
UIYDX121159A	TX	450~453	2.0	80	1.2	10	SMA	-30~+70	121 × 159 × 64
	RX	463~466							
UIYDX342174A	TX	448.2~454.8	1.5	60	1.3	50	N, SMA	-30~+70	342 × 174 × 69
	RX	463.2~469.8							
UIYDX220122A	TX	490~510	1.3	80	1.3	100	N, SMA	-40~+85	220 × 122 × 69
	RX	470~490							
UIYDX151151A	600~1000MHz TX->RX 10MHz		1.5	75	1.22	100	N, SMA	-30~+70	151 × 151 × 44
UIYDX220125A	600~2200MHz TX->RX ~11MHz		1.5	80	1.3	20	N, SMA	-40~+85	220 × 125 × 43
UIYDX170125A	600~2200MHz TX->RX ~13MHz		1.5	80	1.3	20	N, SMA	-40~+85	170 × 125 × 43
UIYDX100160A	TX	663~698	1.5	60	1.3	20	N, SMA	-30~+70	100 × 160 × 47
	RX	617~652							
UIYDX100200A	650~2700MHz TX->RX ~13MHz		1.5	70	1.3	30	N, SMA	-40~+80	100 × 200 × 47
UIYDX8862A	TX	840~845	1.0	60	1.3	50	N, SMA	-30~+70	88 × 62 × 43
	RX	1430~1444							
UIYDX185155A	TX	703~748	1.5	100	1.3	80	N, SMA	-40~+85	185 × 155 × 47
	RX	758~803							
UIYDX15075A	TX	850~980	0.8	30	1.4	75	N, SMA	-40~+85	150 × 75 × 43
	RX	1150~1610							
UIYDX3526A	TX	850~960	2.0	55	1.5	2	SMA	-40~+70	35 × 26 × 10
	RX	1700~1900							
UIYDX14065A	TX	850~960	1.0	80	1.5	100	N, SMA	-40~+70	140 × 65 × 47
	RX	1700~1900							
UIYDX265140A	TX	921~960	1.6	75	1.22	50	N, SMA	-22~+65	265 × 140 × 43
	RX	876~915							
UIYDX11880A	TX	1350~1518	1.0	60	1.4	50	N, SMA	-55~+85	118 × 80 × 43
	RX	1625~1785							
UIYDX100120A	TX	1350~1518	0.5	40	1.4	250	N, SMA	-55~+85	100 × 120 × 38
	RX	1625~1785							

Model No. 型号	Freq. Range (MHz) 频率范围		IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDX12060A	TX	1406.5~1463.5	1.0	80	1.3	50	N, SMA	-20~+65	120 × 60 × 37
	RX	1651.5~1678.5							
UIYDX200102A	TX	1521	2.2	80	1.3	50	N, SMA	-20~+65	200 × 102 × 43
	RX	1529							
UIYDX121175A	TX	1662	3.0	50	1.3	50	N-F	-30~+70	121 × 175 × 35
	RX	1667							
UIYDX102102A	TX	1710~1785	2.0	60	1.5	100	N, SMA	-30~+70	102 × 102 × 29
	RX	1805~1880							
UIYDX100065A	TX	1805~1880	2.0	60	1.5	5	N, SMA	-20~+65	100 × 65 × 32
	RX	1710~1785							
UIYDX118118A	TX	1850~1910	1.5	60	1.5	100	N, SMA	-30~+70	118 × 118 × 35
	RX	1930~1990							
UIYDX10077A	TX	1920~1990	0.5	75	1.22	15	N, SMA	-25~+60	100 × 77 × 38.5
	RX	2110~2170							
UIYDX62112A	TX	1980~2010	1.0	60	1.3	10	N, SMA	-40~+85	62 × 112 × 43
	RX	2170~2200							
UIYDX107107A	TX	2500~2570	1.5	85	1.22	100	N, SMA	-30~+70	107 × 107 × 30
	RX	2620~2690							
UIYDX9976A	TX	2110~2170	2.0	60	1.5	100	N, SMA	-40~+70	99 × 76 × 27.5
	RX	2050~2060							
UIYDX12276A	TX	2620~2695	2.0	60	1.5	100	N, SMA	-40~+70	122 × 76 × 27.5
	RX	2545~2580							
UIYDX9580A	TX	5565~5725	1.5	60	1.45	50	N, SMA	-30~+70	95 × 80 × 24
	RX	5350~5510							
UIYDX9580B	TX	5725~5850	1.5	60	1.45	50	N, SMA	-30~+70	95 × 80 × 24
	RX	5565~5675							
UIYDX18097A	TX	7424~7544	1.2	70	1.5	20	SMA to WR112	-40~+70	180 × 97.7 × 19.5
	RX	7669~7789							
UIYDX10068A	TX	7450~7650	3.0	40	1.5	20	SMA	-40~+70	100 × 68 × 16
	RX	7700~7900							
UIYDX6733A	TX	7450~7900	1.5	70	1.5	20	SMA	-40~+70	67 × 33 × 14
	RX	12750~13250							
UIYDX4382A	TX	12500~12900	2.5	50	1.5	20	SMA	-40~+70	43 × 82 × 11.5
	RX	13100~13400							
UIYDX18484A	TX	12751~12863	1.5	70	1.3	20	SMA to WR75	-40~+70	184 × 82 × 19.5
	RX	13017~13129							

Triplexer 三工器

- Up to 20GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (MHz) 频率范围		IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYTX100120A	CH1	87~108	1.5	60	1.3	50	N, SMA	-20~+65	100 × 120 × 30
	CH2	351~366							
	CH3	402~416							
UIYTX100140A	CH1	136~174	0.8	70	1.4	50	N, SMA	-40~+85	100 × 140 × 35
	CH2	380~395							
	CH3	450~470							
UIYTX150124A	CH1	330~450	1.2	30	1.4	50	N, SMA	-40~+85	150 × 124 × 41
	CH2	850~980							
	CH3	1150~1610							
UIYTX10086A	CH1	850~1000	0.5	30	1.22	100	N, SMA	-30~+70	100 × 86 × 43
	CH2	1700~2000							
	CH3	2500~3000							
UIYTX11676A	CH1	1000~1250	0.5	30	1.22	100	N, SMA	-30~+70	116 × 76 × 40
	CH2	2000~2500							
	CH3	3000~3750							
UIYTX9072A	CH1	1400~1600	0.5	30	1.22	100	N, SMA	-30~+70	90 × 72 × 33
	CH2	2900~3100							
	CH3	4400~4600							
UIYTX120120A	CH1	1710~1735	1.5	50	1.3	50	N, SMA	-30~+70	120 × 120 × 38
	CH2	1805~1830							
	CH3	1880~1920							
UIYTX135185A	CH1	1750~1850	0.8	100	1.3	100	N, SMA	-40~+85	135 × 185 × 43
	CH2	2025~2120							
	CH3	2200~2300							
UIYTX7667A	CH1	1750~1950	0.5	30	1.22	100	N, SMA	-30~+70	76 × 67 × 31
	CH2	3500~3900							
	CH3	5200~5900							
UIYTX7164A	CH1	2100~2300	0.5	30	1.22	100	N, SMA	-30~+70	71 × 64 × 27
	CH2	4200~4600							
	CH3	6300~6900							
UIYTX7164B	CH1	2400~2600	0.5	30	1.22	100	N, SMA	-30~+70	71 × 64 × 27
	CH2	4800~5200							
	CH3	7200~7800							

Tx & Rx Multicoupler 多路耦合系统

- Up to 20GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Transmission & Receiver System

Model No. 型号	Freq. Range (GHz) 频率范围	Tx to Rx Separation 间隔	Channels 端口数量	Isolation 隔离度	IL (dB) 损耗	VSWR 驻波比	Input Power 输入功率	Receiver Amp 接收放大器	Dimension 尺寸
UIY4T4RTR3UA	136~174	~4MHz	4 Tx 4 Rx 1 ANT	Tx-Rx 80dB Tx-Tx 70dB ANT-Tx 50dB Rx-Rx 25dB	9.5	1.25	50W/CH	Yes +6dBm ± 1dBm Adjustable	3U
UIY2T2RTR2UB2C	350~520	~5MHz	2 Tx 2 Rx 1 ANT 1 Tx Coup 1 Rx Coup	Tx-Rx 85dB Tx-Tx 70dB ANT-Tx 50dB Rx-Rx 25dB	5.5	1.2	50W/CH	Yes +5~+15dBm Adjustable	2U
UIY2T2RTR350158A	350~520	~5MHz	2 Tx 2 Rx 1 ANT	Tx-Rx 75dB Tx-Tx 28dB Rx-Rx 28dB	4.8	1.25	50W/CH	No	350 × 158 × 88
UIY2T8RTR2UB2C	350~520	~5MHz	2 Tx 8 Rx 1 ANT 1 Tx Coup 1 Rx Coup	Tx-Rx 85dB Tx-Tx 70dB ANT-Tx 50dB Rx-Rx 25dB	5.5	1.2	50W/CH	Yes +5~+15dBm Adjustable	2U
UIY3T3RTR500320A	350~520	~5MHz	3 Tx 3 Rx 1 ANT	Tx-Rx 65dB Tx-Tx 25dB Rx-Rx 25dB	8.5	1.25	50W/CH	No	500 × 320 × 100
UIY4T4RTR3UB2C	350~520	~5MHz	4 Tx 4 Rx 1 ANT 1 Tx Coup 1 Rx Coup	Tx-Rx 85dB Tx-Tx 70dB ANT-Tx 50dB Rx-Rx 25dB	8.5	1.25	50W/CH	Yes +5~+15dBm Adjustable	3U
UIY4T8RTR3UB2C	350~520	~5MHz	4 Tx 8 Rx 1 ANT 1 Tx Coup 1 Rx Coup	Tx-Rx 85dB Tx-Tx 70dB ANT-Tx 50dB Rx-Rx 25dB	8.5	1.25	50W/CH	Yes +5~+15dBm Adjustable	3U

RX Splitter 分路器

- Up to 20GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	Isolation (dB) 隔离度	VSWR 驻波比	Channels 通道数量	Receiver Amplifier 接收放大器	Amplifier Gain 放大增益	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 尺寸
UIY2RS1UB	350~520	20%	25	1.2	2 Rx 1 ANT	Yes	+5~+15dBm Adjustable	N	-30~+75	483 × 300 × 45
UIY4RS1UB	350~520	20%	25	1.2	4 Rx 1 ANT	Yes	+5~+15dBm Adjustable	N	-30~+75	483 × 300 × 45
UIY6RS1UB	350~520	20%	25	1.2	6 Rx 1 ANT	Yes	+5~+12dBm Adjustable	N	-30~+75	483 × 300 × 45
UIY8RS1UB	350~520	20%	25	1.2	8 Rx 1 ANT	Yes	+5~+10dBm Adjustable	N	-30~+75	483 × 300 × 45

Tx Combiner 合路器

- Up to 20GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Tx Same Band Combiner

Model No. 型号	Freq. Range (GHz) 频率范围	BW Max. 带宽	Channels 通道数量	IL. (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Input Power 输入功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 尺寸
UIY2TC1UA	100~200	30%	2 Tx 1 ANT	4.5	75	1.2	50	N	-30~+75	483 × 300 × 45
UIY4TC1UA	100~200	30%	4 Tx 1 ANT	7.5	75	1.2	50	N	-30~+75	483 × 300 × 45
UIY6TC1UA	100~200	30%	6 Tx 1 ANT	10.5	75	1.2	50	N	-30~+75	483 × 300 × 45
UIY8TC1UA	100~200	30%	8 Tx 1 ANT	10.5	75	1.2	50	N	-30~+75	483 × 300 × 45
UIY2TC1UC	175~400	10%	2 Tx 1 ANT	4.5	75	1.3	50	N	-30~+75	483 × 300 × 45
UIY2TC1UB	350~520	10%	2 Tx 1 ANT	3.8	75	1.2	50	N	-30~+75	483 × 300 × 45
UIY4TC1UB	350~520	10%	4 Tx 1 ANT	7.0	75	1.2	50	N	-30~+75	483 × 300 × 45
UIY6TC1UB	350~520	10%	6 Tx 1 ANT	9.5	75	1.2	50	N	-30~+75	483 × 300 × 45
UIY8TC1UB	350~520	10%	8 Tx 1 ANT	10.5	75	1.2	50	N	-30~+75	483 × 300 × 45

Tx Notch Combiner

Model No. 型号	Freq. Range (GHz) 频率范围	Separation 间隔	Channels 通道数量	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Input Power 输入功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 尺寸
UIY2TC420210B	110~140	250KHz	2 Tx 1 ANT	3.4	65	1.25	100	N	-10~+65	420 × 210 × 850
UIY3TC420410B	110~140	250KHz	3 Tx 1 ANT	3.6	65	1.25	100	N	-10~+65	420 × 410 × 850
UIY4TC420420B	110~140	250KHz	4 Tx 1 ANT	3.8	65	1.25	100	N	-10~+65	420 × 420 × 850
UIY6TC420630B	110~140	250KHz	6 Tx 1 ANT	4.6	65	1.25	100	N	-10~+65	420 × 630 × 850
UIY8TC420844B	110~140	250KHz	8 Tx 1 ANT	5.0	65	1.25	100	N	-10~+65	420 × 844 × 850
UIY2TC420210A	136~174	250KHz	2 Tx 1 ANT	3.4	65	1.25	100	N	-10~+65	420 × 210 × 750
UIY3TC420410A	136~174	250KHz	3 Tx 1 ANT	3.6	65	1.25	100	N	-10~+65	420 × 410 × 750
UIY4TC420420A	136~174	250KHz	4 Tx 1 ANT	3.8	65	1.25	100	N	-10~+65	420 × 420 × 750
UIY6TC420630A	136~174	250KHz	6 Tx 1 ANT	4.6	65	1.25	100	N	-10~+65	420 × 630 × 750
UIY8TC420844A	136~174	250KHz	8 Tx 1 ANT	5.0	65	1.25	100	N	-10~+65	420 × 844 × 750
UIY2TC330170A	330~520	250KHz	2 Tx 1 ANT	3.6	65	1.25	50	N	-10~+65	330 × 170 × 500
UIY3TC330420A	330~520	250KHz	3 Tx 1 ANT	3.8	65	1.25	50	N	-10~+65	330 × 420 × 500
UIY4TC330330A	330~520	250KHz	4 Tx 1 ANT	4.0	65	1.25	50	N	-10~+65	330 × 330 × 500
UIY6TC330500A	330~520	250KHz	6 Tx 1 ANT	4.6	65	1.25	50	N	-10~+65	330 × 500 × 500
UIY8TC330670A	330~520	250KHz	8 Tx 1 ANT	5.0	65	1.25	50	N	-10~+65	330 × 670 × 500

Hybrid Combiner 电桥/同频合路器

- Frequency range 88 to 3800MHz
- Military, space and commercial applications.
- Low insertion loss, high rejection, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (GHz) 频率范围	Channels 端口数	BW Max. 带宽	IL (dB) 损耗	Isolation (dB) 隔离度	VSWR 驻波比	Power(W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIY2T1HC422165A	70~174	2 to 1	Full	0.5	25	1.4	200	N, SMA	-30~+60	422 × 165 × 81
UIY2T2HC40030A	70~174	2 to 2	Full	0.5	25	1.3	200	N, SMA	-30~+60	400 × 30 × 30
UIY2T1HC16445A	136~174	2 to 1	Full	0.3	28	1.15	200	N, SMA	-40~+85	164 × 45 × 50
UIY3T1HC30480A	136~174	3 to 1	Full	0.9	20	1.3	200	N, SMA	-40~+85	304 × 80 × 50
UIY4T1HC30480A	136~174	4 to 1	Full	1.0	25	1.3	200	N, SMA	-40~+85	304 × 80 × 50
UIY2T1HC22040A	175~400	2 to 1	60%	0.8	23	1.3	200	N, SMA	-20~+70	220 × 40 × 45
UIY2T2HC23040A	175~400	2 to 2	60%	0.8	23	1.3	200	N, SMA	-20~+70	230 × 40 × 26.5
UIY4T2HC26280B	350~470	4 to 2	16%	0.6	25	1.25	200	N, SMA	-40~+85	262 × 80 × 50
UIY2T1HC13437A	350~520	2 to 1	Full	0.5	26	1.2	200	N, SMA	-40~+85	144 × 37.2 × 58
UIY2T2HC14844A	350~520	2 to 2	Full	0.5	25	1.2	200	N, SMA	-40~+85	148 × 44 × 23
UIY4T1HC30570A	350~520	4 to 1	Full	0.4	25	1.2	200	N, SMA	-40~+85	305 × 70 × 50
UIY8T1HC440120A	350~520	8 to 1	Full	0.8	25	1.2	400	N, SMA	-40~+85	440 × 120 × 50
UIY3T1HC30480B	400~470	3 to 1	Full	0.7	23	1.3	200	N, SMA	-40~+85	304 × 80 × 50
UIY2T1HC14244A	698~2700	2 to 1	Full	0.5	23	1.25	200	N, SMA	-40~+85	142 × 44 × 45
UIY2T2HC14844B	698~2700	2 to 2	Full	0.5	23	1.25	200	N, SMA	-40~+85	148 × 44 × 23

Directional Coupler 定向耦合器

- Frequency range 136MHz to 18GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Model No. 型号	Freq. Range (GHz) 频率范围	Nominal Coupling (dB) 耦合度	Flatness (dB) 平坦度	IL. (dB) 损耗	Directivity (dB) 方向性	VSWR 驻波比	Power (W) 功率	Connector Type 连接形式	Temp. (°C) 温度范围	Dimension LxWxH(mm) 外形尺寸
UIYDCP14337B	0.136~0.174	5~40	± 1.0	0.2	20	1.25	200	N	-20~+70	143 × 37 × 20
UIYDCP14337A	0.35~0.52	5~40	± 1.0	0.2	20	1.25	200	N	-20~+70	143 × 37 × 20
UIYDCP22440A	0.35~2.7	5~40	± 2.0	0.2	18	1.3	200	N	-35~+65	224.4 × 40 × 16.5
UIYDCP12815A	0.4~0.5	10~30	± 0.7	0.5	18	1.25	50	SMA	-55~+85	128 × 15 × 11
UIYDCP13315A	0.5~2.5	10~30	± 0.7	0.5	18	1.25	50	SMA	-55~+85	133 × 15 × 11
UIYDCP18044A	0.5~3.0	5~30	± 1.0	0.24	18	1.3	300	N	-40~+80	180 × 44 × 21
UIYDCP12040A	0.698~2.7	5~40	± 2.0	0.2	19	1.25	200	N	-20~+70	120 × 40 × 17.5
UIYDCP8515A	0.8~2.5	10~30	± 0.7	0.5	18	1.25	50	SMA	-55~+85	85 × 15 × 11
UIYDDCP21424A	0.8~3.6 Dual	7~10	± 1.3	3.5	15	1.5	10	N,SMA	-40~+70	214 × 24 × 20
UIYDCP7315A	1.0~4.0	10~30	± 0.7	0.5	18	1.25	50	SMA	-55~+85	73 × 15 × 11
UIYDCP8220A	1.0~4.0	6~30	± 0.7	0.5	18	1.3	50	N	-55~+85	82 × 20 × 20
UIYDDCP7448A	1.4~2.0 Dual	30	± 0.7	0.5	18	1.3	120	N, SMA	-40~+85	74 × 48 × 20
UIYDCP4315A	2.0~8.0	6~30	± 0.7	0.5	18	1.25	50	SMA	-55~+85	43 × 15 × 11
UIYDCP4315D	2.5~5.2	10~30	± 0.8	0.4	20	1.3	40	SMA	-55~+85	43 × 15 × 11
UIYDDCP5555A	3.0~4.0 Dual	50	± 1.0	0.4	10	1.3	300	N	-40~+85	55 × 55 × 20
UIYDDCP10025A	3.0~6.0 Dual	10~30	± 1.0	1.0	18	1.3	100	SMA, N	-55~+85	100 × 25 × 19
UIYDCP4315C	4.0~12.4	10~30	± 0.8	0.5	15	1.35	20	SMA	-55~+85	43 × 15 × 11
UIYDCP5525A	2.0~8.0	6~30	± 1.0	1.0	16	1.5	50	N	-55~+85	55 × 25 × 23
UIYDCP3315A	8.0~18.0	10~30	± 0.7	0.8	10	1.5	50	SMA	-55~+85	33 × 15 × 11
UIYWCP10056A	9.0~10.0	6~50	± 0.7	0.2	15	1.1	5000	WR90(BJ100)	-55~+70	100 × 41.3 × 56.8

Waveguide to Coaxial Adapter 波导同轴转换

- Frequency range 0.32 to 112GHz.
- Military, space and commercial applications.
- Low insertion loss, high isolation, high power handling.
- Custom design available upon request.



Right Angle 90° Waveguide to Coaxial Adapter

Model No. 型号	Freq.Range (GHz) 频率范围	IL. (dB) 损耗	VSWR 驻波比	Connector Type (Waveguide) 波导口径	Connector Type (Coaxial) 同轴连接形式	CW Power (W) 平均功率	Peak Power(KW) 峰值功率	Temp. (°C) 温度范围
UIYWTCWR2300A	0.32~0.49	0.12	1.25	WR2300(BJ3)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR2100A	0.35~0.53	0.12	1.25	WR2100(BJ4)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR1800A	0.41~0.62	0.2	1.25	WR1800(BJ5)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR1500A	0.49~0.75	0.12	1.25	WR1500(BJ6)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR1150A	0.64~0.96	0.12	1.25	WR1150(BJ8)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR975A	0.75~1.12	0.12	1.25	WR975(BJ9)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR770A	0.96~1.45	0.12	1.2	WR770(BJ12)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR650A	1.13~1.73	0.2	1.2	WR650(BJ14)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR510A	1.45~2.20	0.2	1.2	WR510(BJ18)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR430A	1.72~2.61	0.2	1.2	WR430(BJ22)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR340A	2.17~3.30	0.2	1.25	WR340(BJ26)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR284A	2.60~3.95	0.15	1.25	WR284(BJ32)	N, SMA, 7/16	300	3	-55~+85
UIYWTCWR229A	3.22~4.90	0.15	1.15	WR229(BJ40)	N, SMA	100	3	-55~+85
UIYWTCWR187A	3.94~5.99	0.15	1.15	WR187(BJ48)	N, SMA	100	3	-55~+85
UIYWTCWR159A	4.64~7.05	0.2	1.15	WR159(BJ58)	N, SMA	100	3	-55~+85
UIYWTCWR137A	5.38~8.17	0.15	1.15	WR137(BJ70)	N, SMA	100	3	-55~+85
UIYWTCWR112A	6.57~9.99	0.2	1.15	WR112(BJ84)	N, SMA	50	3	-55~+85
UIYWTCWR90A	8.20~12.5	0.2	1.15	WR90(BJ100)	N, SMA	50	1	-55~+85
UIYWTCWR75A	9.84~15.0	0.2	1.15	WR75(BJ120)	SMA	50	1	-55~+85
UIYWTCWR62A	11.9~18.0	0.2	1.15	WR62(BJ140)	SMA	50	1	-55~+85
UIYWTCWR51A	14.5~22.0	0.25	1.2	WR51(BJ180)	SMA, 2.92mm	50	1	-55~+85
UIYWTCWR42A	18.0~26.5	0.25	1.2	WR42(BJ220)	SMA, 2.92mm	50	1	-55~+85
UIYWTCWR34A	21.7~33.0	0.25	1.2	WR34(BJ260)	2.92mm	3	0.1	-55~+85
UIYWTCWR28A	26.5~40.0	0.25	1.25	WR28(BJ320)	2.92mm, 2.4mm	3	0.1	-55~+85
UIYWTCWR22A	33.0~50.0	0.4	1.25	WR22(BJ400)	2.4mm	3	0.1	-55~+85
UIYWTCWR19A	40.0~60.0	1.0	1.8	WR19(BJ500)	1.85mm	3	0.1	-55~+85
UIYWTCWR15A	49.8~75.5	1.0	2.0	WR15(BJ620)	1.85mm	3	0.1	-55~+85
UIYWTCWR12A	60.0~90.0	1.2	1.6	WR12(BJ740)	1.0mm	3	0.1	-55~+85
UIYWTCWR10A	75.0~110.0	1.2	1.6	WR10(BJ900)	1.0mm	3	0.1	-55~+85

End Launch 180° Waveguide to Coaxial Adapter

Model No. 型号	Freq. Range (GHz) 频率范围	IL. (dB) 损耗	VSWR 驻波比	Connector Type (Waveguide) 波导口径	Connector Type (Coaxial) 同轴连接形式	CW Power (W) 平均功率	Peak Power(KW) 峰值功率	Temp. (°C) 温度范围
UIYWTCWR340E	2.17~3.30	0.2	1.25	WR340(BJ26)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR284E	2.6~3.95	0.2	1.25	WR284(BJ32)	N, SMA, 7/16	100	3	-55~+85
UIYWTCWR284F	2.6~3.95	0.2	1.25	WR284(BJ32)	N, 7/16	300	3	-55~+85
UIYWTCWR187E	3.94~5.99	0.3	1.25	WR187(BJ48)	N, SMA	100	3	-55~+85
UIYWTCWR159E	4.64~7.05	0.3	1.25	WR159(BJ58)	N, SMA	100	3	-55~+85
UIYWTCWR137E	5.38~8.17	0.3	1.25	WR137(BJ70)	N, SMA	100	3	-55~+85
UIYWTCWR112E	6.57~9.99	0.3	1.25	WR112(BJ84)	N, SMA	50	3	-55~+85
UIYWTCWR90E	8.2~12.5	0.3	1.25	WR90(BJ100)	N, SMA	50	1	-55~+85
UIYWTCWR75E	9.84~15.0	0.3	1.25	WR75(BJ120)	SMA	50	1	-55~+85
UIYWTCWR62E	11.9~18.0	0.3	1.25	WR62(BJ140)	SMA	50	1	-55~+85
UIYWTCWR51E	14.5~22.0	0.3	1.3	WR51(BJ180)	SMA, 2.92mm	50	1	-55~+85
UIYWTCWR42E	18.0~26.5	0.25	1.25	WR42(BJ220)	SMA, 2.92mm	50	1	-55~+85
UIYWTCWR34E	21.7~33.0	0.25	1.2	WR34(BJ260)	2.92mm	3	0.1	-55~+85
UIYWTCWR28E	26.5~40.0	0.25	1.25	WR28(BJ320)	2.92mm, 2.4mm	3	0.1	-55~+85
UIYWTCWR22E	33.0~50.0	0.5	1.6	WR22(BJ400)	2.4mm	3	0.1	-55~+85
UIYWTCWR19E	40.0~60.0	1.0	1.8	WR19(BJ500)	1.85mm	3	0.1	-55~+85
UIYWTCWR15E	49.8~67.0	0.6	1.8	WR15(BJ620)	1.85mm	3	0.1	-55~+85
UIYWTCWR15F	50.0~75.0	0.6	1.5	WR15(BJ620)	1.0mm	3	0.1	-55~+85
UIYWTCWR12E	60.0~90.0	0.5	1.5	WR12(BJ740)	1.0mm	3	0.1	-55~+85
UIYWTCWR10E	73.8~112.0	1.5	1.8	WR10(BJ900)	1.0mm	3	0.1	-55~+85

Typical Products 典型产品


Coaxial Circulator 同轴环行器 136~174MHz



2 Way Power Divider 二路功分器 136~520MHz



Coaxial Circulator 同轴环行器 800~1000MHz

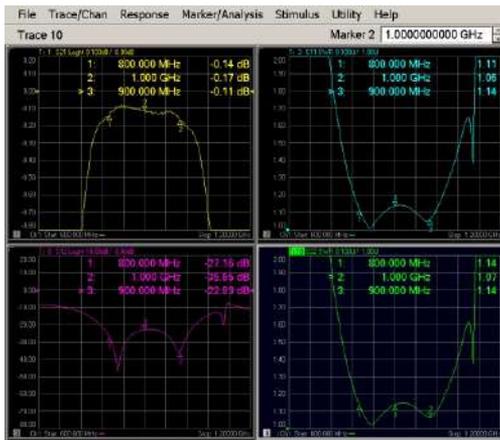

Broadband Isolator 宽带隔离器 1.5~3.0GHz



Dual Junction Circulator 双节环行器 8.0~12.0GHz



Coaxial Isolator 同轴隔离器 13.75~14.5GHz



10100110110101111010101

Tel: +86-755-83748888

+86-755-25999990

+86-755-25999909

Fax: +86-755-25999959

Email: sales@uiy.com sales@uiy.com.cn

Address: No. 8, Lane 1, Xintun East Zone, Longgang District,
Shenzhen 518172, China.

深圳市龙岗区新屯东区一巷8号

Website: www.uiy.com www.uiy.com.cn

